

RENOVATION

5207 J ST SACRAMENTO, CA 95819

GENERAL NOTES:

1. GENERAL NOTES APPLY TO ALL DRAWINGS
2. DO NOT SCALE DRAWINGS. ANY DIMENSIONAL INFORMATION REQUIRED WHICH IS NOT INDICATED ON DRAWING DIMENSION STRINGS SHALL BE OBTAINED FROM THE ARCHITECT.
3. DIMENSIONS SHOWN ARE FINISH SURFACE OF EXISTING CONSTRUCTION, UNLESS NOTED OTHERWISE .
4. CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS (I.E EXISTING MATERIALS, FRAMING MEMBER SIZES AND LOCATIONS, METHODS OF CONSTRUCTION). IF DISCREPANCIES ARE FOUND, NOTIFY ARCHITECT BEFORE PROCEEDING WITH WORK.
5. CONTRACTOR SHALL MAINTAIN THE IMMEDIATE CONSTRUCTION SITE IN A SECURE, CLEAN AND SAFE MANNER.
6. PROTECTION : CONTRACTORS SHALL BE SOLELY RESPONSIBLE FOR TAKING ALL STEPS NECESSARY TO PROTECT THE PUBLIC FROM INJURY AND ADJACENT PROPERTY DAMAGES DURING CONSTRUCTION AS REQUIRED BY LOCAL CODES.

PROJECT:RENOVATION

ADDRESS:5207 J ST SACRAMENTO, CA 95819

APPLICABLE CODES:

1. 2022 International Building Code with local amendments.
2. 2022 International Existing Building Code.
3. 2022 International Energy Conservation Code.
4. 2022 ANSI A-117.1 Accessible & Useable Building & facilities.
5. 2022 International Plumbing Code with local amendments.
6. 2022 International Mechanical Code with local amendments.
7. 2022 International Fuel Gas Code with local amendments.
8. 2022 National Electric Code.
9. 2022 International Fire Code with local amendments.

INDEX TO DRAWINGS

SHEET NUMBER	SHEET NAME	SHEET NUMBER	SHEET NAME
ELECTRICAL		MECHANICAL	
EL-00	COVER SHEET	ME-01	NOTES
EL-01	NOTES	ME-02	FIRST FLOOR HVAC PLAN
EL-02	FIRST FLOOR LIGHTING PLAN	ME-03	SECOND FLOOR HVAC PLAN
EL-03	SECOND FLOOR LIGHTING PLAN	ME-04	DETAILS
EL-04	FIRST FLOOR POWER PLAN		
EL-05	SECOND FLOOR POWER PLAN		
EL-06	PANEL SCHEDULE & SINGLE LINE DIAGRAM		
PLUMBING			
PL-01	NOTES		
PL-02	FIRST FLOOR DRAINAGE PLAN		
PL-03	SECOND FLOOR DRAINAGE PLAN		
PL-04	FIRST FLOOR WATER SUPPLY PLAN		
PL-05	SECOND FLOOR WATER SUPPLY PLAN		
PL-06	RISER DIAGRAM		
PL-07	DETAILS		

SCOPE OF WORK:

1. ELECTRICAL
2. PLUMBING
3. MECHANICAL

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

ELECTRICAL

PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:

COVER SHEET

DRAWN BY:	CHECKED BY:	DATE:
A.S	S.A	02 JUL 2023
JOB NO	SHT NO	SCALE:
632	EL-00	NTS @A3

BASIC ELECTRICAL REQUIREMENTS:

1. GENERAL: ALL ELECTRICAL WORK SHALL CONFIRM TO THE REQUIREMENTS OF THE 2022 CALIFORNIA ELECTRICAL CODE AND NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA) STANDARDS UNLESS MORE STRINGENT REQUIREMENTS ARE INDICATED. ALL ELECTRICAL WORK SHALL COMPLY WITH ADA RECOMMENDATIONS. ALL ELECTRICAL WORK SHALL BE PERFORMED IN A NEAT AND WORKMAN LIKE MANNER BY A LICENSED ELECTRICIAN, OR A CERTIFIED APPRENTICE WORKING UNDER THE DIRECT SUPERVISION OF A LICENSED ELECTRICIAN, USING THE BEST METHODS KNOWN TO THE TRADE AND SHALL PRESENT A NEAT AND PROFESSIONAL APPEARANCE WHEN COMPLETED. THE OWNER RESERVES THE RIGHT TO CHANGE, WITHOUT ADDITIONAL COST, THE LOCATION OF ANY APPARATUS OR OUTLET, PROVIDED SUCH CHANGE DOES NOT ADD MORE THAN 10 FT TO THE FEEDER ADN IS ORDERED BEFORE INSTALLATION OF THE AFFECTED PORTION OF THE WORK IS COMMENCED. CONTRACTOR SHALL BRING ALL CONFLICTS ON THE DRAWINGS TO THE OWNERS ATTENTION FOR HIS RESOLUTION PRIOR TO PERFORMING THAT WORK.
2. THE CONTRACTOR SHALL SURVEY THE PROJECT SITE PRIOR TO THE BID TO ASSESS ACTUAL FIELD CONDITIONS. FAILURE TO PERFORM THIS INSPECTION BINDS THE CONTRACTOR TO PERFORM THE WORK WITHOUT EXTRA CHARGES DESPITE THE IGNORANCE OF REASONABLY ANTICIPATED CONDITIONS.
3. ROUGH-INS: THE CONTRACTOR SHALL VERIFY AND COORDINATE THE ROUGH-IN REQUIREMENTS OF EACH ITEM OF EQUIPMENT WITH THE CONTRACTOR SUPPLYING THE EQUIPMENT.
4. INSTALLATION: THE ELECTRICAL DRAWINGS INDICATE THE EXTENT AND GENERAL LOCATION AND ARRANGEMENT OF EQUIPMENT AND MATERIALS. THE CONTRACTOR SHALL BECOME FAMILIAR WITH ALL DETAILS OF THE WORK AND VERIFY ALL DIMENSIONS IN THE FIELD SO THAT EQUIPMENTS AND MATERIALS WILL BE PROPERLY LOCATED AND READILY ACCESSIBLE. THE CONTRACTOR SHALL SEQUENCE, COORDINATE, AND INTEGRATE THE VARIOUS ELEMENTS OF ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS. COMPLY WITH THE FOLLOWING REQUIREMENTS:
- A. VERIFY ALL DIMENSIONS BY FIELD MEASUREMENTS.
- B. COORDINATE ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS INSTALLATION WITH OTHER BUILDING COMPONENTS AND TRADES.
- C. ARRANGE FOR CHASES, SLOTS, AND OPENINGS IN OTHER BUILDING COMPONENTS DURING PROGRESS OF CONSTRUCTION, TO ALLOW FOR INSTALLATION OF ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS.
- D. SEQUENCE, COORDINATE, AND INTEGRATE INSTALLATION OF ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS FOR EFFICIENT FLOW OF THE WORK.
- E. WHERE MOUNTING HEIGHTS ARE NOT INDICATED, INSTALL ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS TO PROVIDE MAXIMUM HEADROOM POSSIBLE.
- F. INSTALL ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS TO CONFORM WITH APPROVED SUBMITTAL DATA TO THE GREATEST EXTENT POSSIBLE. CONFORM TO THE ARRANGEMENTS INDICATED ON THE ELECTRICAL DRAWINGS, RECOGNIZING THAT PORTIONS OF THE WORK ARE SHOWN ONLY IN DIAGRAMMATIC FORM. WHERE COORDINATION REQUIREMENTS CONFLICT WITH INDIVIDUAL SYSTEM REQUIREMENTS, REFER CONFLICT TO THE ARCHITECT/ENGINEER OR OWNER'S REPRESENTATIVE FOR RESOLUTION.
- G. IN GENERAL, INSTALL ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS LEVEL AND PLUMB, PARALLEL AND PERPENDICULAR TO BUILDING LINES AND/OR FEATURES AND/OR OTHER BUILDING SYSTEMS.
- H. INSTALL ELECTRICAL EQUIPMENT TO FACILITATE SERVICING, MAINTENANCE, AND REPAIR OR REPLACEMENT OF EQUIPMENT AND COMPONENT PARTS. AS MUCH AS PRACTICAL, CONNECT EQUIPMENT FOR EASE OF DISCONNECTING, WITH MINIMUM OF INTERFERENCE WITH OTHER INSTALLATIONS.
- I. INSTALL ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS GIVING RIGHT-OF-WAY PRIORITY TO SYSTEMS REQUIRED TO BE INSTALLED AT A SPECIFIC SLOPE (INCL. SPRINKLER SYSTEMS).
5. CUTTING AND PATCHING: ALL ELECTRICAL WORK SHALL BE CAREFULLY LAID OUT IN ADVANCE, AND WHERE CUTTING, CHANNELING, CHASING, OR DRILLING OF FLOORS, WALLS, PARTITIONS, CEILINGS, OR OTHER SURFACES IS NECESSARY FOR THE PROPER INSTALLATION, SUPPORT, OR ANCHORAGE OF CONDUIT OR OTHER ELECTRICAL WORK, THIS WORK SHALL BE CAREFULLY DONE. ANY RESULTING DAMAGE TO THE BUILDING OR OTHER SYSTEMS, EQUIPMENT, OR MATERIALS SHALL BE REQUIRED BY SKILLED MECHANICS OF THE TRADES INVOLVED, AT NO ADDITIONAL COST TO THE OWNER.
6. PRODUCTS: SYSTEMS, EQUIPMENT, AND MATERIALS DESCRIBED ON THE ELECTRICAL DRAWINGS ESTABLISH THE MINIMUM STANDARDS FOR QUALITY AND STYLE AND SHALL BE THE BASIS OF THE BID. ALL SYSTEMS, EQUIPMENT, AND MATERIALS SHALL BE NEW AND SHALL BEAR THE UL LABEL OR BE UL LISTED, WHERE APPLICABLE, AND SHALL BE INSTALLED IN ACCORDANCE WITH THE NEC AND NEMA STANDARDS.

7. SUBSTITUTIONS: WHERE SYSTEMS, EQUIPMENT, OR MATERIALS ARE SPECIFIED BY MANUFACTURER OR BRAND NAME AND CATALOG NUMBER, SUCH SPECIFICATION SHALL ESTABLISH THE MINIMUM STANDARDS FOR QUALITY AND STYLE AND SHALL BE THE BASIS OF THE BID. SYSTEMS, EQUIPMENT, AND MATERIALS SO SPECIFIED SHALL BE FURNISHED UNDER THE CONTRACT UNLESS CHANGED BY WRITTEN AGREEMENT. SHOULD THE CONTRACTOR PROPOSE TO FURNISH PRODUCTS OTHER THAN THOSE SPECIFIED, AS PERMITTED BY "OR APPROVED EQUAL" CLAUSES, HE SHALL SUBMIT A WRITTEN REQUEST FOR SAID SUBSTITUTIONS THROUGH APPROPRIATE CHANNELS TO THE ARCHITECT/ENGINEER FOR HIS REVIEW. SUCH REQUEST SHALL BE ACCOMPANIED WITH COMPLETE DESCRIPTIVE LITERATURE, INCLUDING, BUT NOT LIMITED TO, CATALOG CUT SHEETS, BROCHURES, CIRCULARS, SPECIFICATIONS, PERFORMANCE DATA, INSTALLATION INSTRUCTIONS, SHOP DRAWINGS, AND OTHER PRINTED INFORMATION IN SUFFICIENT DETAIL AND SCOPE TO VERIFY COMPLIANCE WITH THE REQUIREMENTS OF THE CONTRACT. DESCRIPTIVE LITERATURE ON PROPOSED SUBSTITUTIONS SHALL BE CLEAR, CONCISE, AND LOGICALLY ARRANGED. ALL DATA WHICH IS, AND IS NOT, APPLICABLE SHALL BE CLEARLY IDENTIFIED AS SUCH. IF REQUESTED, THE CONTRACTOR SHALL SUBMIT SAMPLES OF BOTH SPECIFIED AND PROPOSED ITEMS FOR INSPECTION. DESCRIPTIVE LITERATURE ON PROPOSED SUBSTITUTIONS SHALL BE RETURNED WITHOUT REVIEW IF NOT PROPERLY PREPARED. ACCEPTANCE OR REJECTION OF PROPOSED SUBSTITUTIONS SHALL BE UP TO THE DESCRIPTION OF THE ARCHITECT/ENGINEER AND/OR THE OWNER.
8. SUBMITTALS: THE CONTRACTOR SHALL FOLLOW THE GENERAL PROVISIONS OF THE CONTRACT AND ESTABLISHED PROCEDURES. SUBMITTALS SHALL CONSIST OF COMPLETE DESCRIPTIVE LITERATURE INCLUDING, BUT NOT LIMITED TO, CATALOG CUT SHEETS, BROCHURES, CIRCULARS, SPECIFICATIONS, PERFORMANCE DATA, INSTALLATION INSTRUCTIONS, SHOP DRAWINGS, AND OTHER PRINTED INFORMATION IN SUFFICIENT DETAIL AND SCOPE TO VERIFY COMPLIANCE WITH THE REQUIREMENTS OF THE CONTRACT. DESCRIPTIVE LITERATURE SHALL BE CLEAR, CONCISE, AND LOGICALLY ARRANGED. ALL DATA WHICH IS, AND IS NOT, APPLICABLE SHALL BE CLEARLY IDENTIFIED AS SUCH. IF REQUESTED, THE CONTRACTOR SHALL SUBMIT SAMPLES OF SPECIFIED ITEMS FOR INSPECTION. DESCRIPTIVE LITERATURE SHALL BE RETURNED WITHOUT REVIEW IF NOT PROPERLY PREPARED. THE FOLLOWING SYSTEMS, EQUIPMENT, AND MATERIALS, AS A MINIMUM, REQUIRE SUBMITTALS:
- A. ANY PROPOSED SUBSTITUTIONS:
- B. WIRING DEVICES.
- C. PANELBOARDS.
- D. DISCONNECT SWITCHES.
- E. CIRCUIT BREAKERS.
- F. LIGHTING FIXTURES INCLUDING BALLASTS.

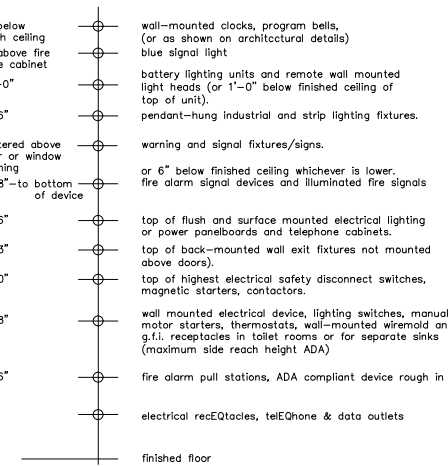
9. RECORD DRAWINGS: THE CONTRACTOR SHALL MAINTAIN AT THE SITE A CLEAN, UNDAMAGED SET OF BLUE- OR BLACK-LINE WHITE PRINTS OF CONTRACT DRAWINGS. THIS RECORD SET OF CONTRACT DRAWINGS SHALL BE MARKED TO SHOW THE ACTUAL INSTALLATION AND WHERE THE ACTUAL INSTALLATION VARIES SUBSTANTIALLY FROM THE ELECTRICAL WORK AS ORIGINALLY SHOWN. MARK WHICHEVER DRAWINGS ARE MOST CAPABLE OF SHOWING CONDITIONS FULLY AND ACCURATELY. GIVE PARTICULAR ATTENTION TO CONCEALED ELEMENTS THAT WOULD BE DIFFICULT TO MEASURE AND RECORD AT A LATER DATE. MARK RECORD DRAWINGS WITH A RED ERASABLE PENCIL; USE OTHER COLORS TO DISTINGUISH BETWEEN VARIATIONS IN SEPARATE CATEGORIES OF THE ELECTRICAL WORK. NOTE CONTRACT MODIFICATIONS AND APPROVED SUBSTITUTIONS WHERE APPLICABLE.
10. PROTECTION OF INSTALLED SYSTEMS, EQUIPMENT, AND MATERIALS: PROTECT INSTALLED SYSTEMS, EQUIPMENT, AND MATERIALS FROM DAMAGE UNTIL FINAL ACCEPTANCE BY THE OWNER. REPAIR OR REPLACE, AT NO ADDITIONAL COST TO THE OWNER, DAMAGED SYSTEMS, EQUIPMENT, AND MATERIALS TO THE SATISFACTION OF THE ARCHITECT/ENGINEER AND/OR OWNER.
11. CLEANING: UPON COMPLETION OF INSTALLATION, INSPECT INTERIOR AND EXTERIOR OF ALL ELECTRICAL EQUIPMENT. REMOVE PAINT SPLATTERS AND OTHER SPOTS, DIRT, AND DEBRIS. TOUCH-UP SCRATCHES AND MARKS OF FINISH TO MATCH ORIGINAL FINISH.
12. CERTIFICATIONS: THE FOLLOWING SHALL BE OBTAINED AND SUBMITTED TO THE OWNER PRIOR TO FINAL PAYMENT:
- A. ELECTRICAL SYSTEMS: A CERTIFICATE OF FINAL INSPECTION AND APPROVAL BY THE AUTHORITIES HAVING JURISDICTION
13. GUARANTEE: THE CONTRACTOR SHALL SUBMIT A WRITTEN GUARANTEE TO THE OWNER, PRIOR TO FINAL PAYMENT, THAT WARRANTS THE INSTALLATION SHALL REMAIN FREE OF DEFECTS FOR A PERIOD OF ONE YEAR AFTER FINAL ACCEPTANCE BY THE OWNER. THE GUARANTEE SHALL STATE THAT THE OWNER IS NOT LIABLE FOR PARTS AND LABOR COSTS INCURRED BY THE CONTRACTOR IN THE REPAIR OF ACTUAL PRODUCT OR INSTALLATION DEFECTS. THE GUARANTEE SHALL STATE THAT THE ON-SITE RESPONSE TIME TO REQUESTS FOR ASSISTANCE WILL BE 24 HOURS FOR NON-EMERGENCY CONDITIONS AND 2 HOURS FOR EMERGENCY CONDITIONS.

ELECTRICAL MATERIALS:

1. RACEWAYS:
- A. RIGID GALVANIZED STEEL (RGS) CONDUIT: ANS C80.1.
- B. ELECTRICAL METALLIC TUBING (EMT) AND FITTINGS: ANS C80.3 WITH COMPRESSION TYPE FITTINGS.
- C. LIQUIDTIGHT FLEXIBLE METAL CONDUIT: UL 360. FLEXIBLE STEEL CONDUIT WITH PVC JACKETS.
- D. NONMETALLIC CONDUIT AND TUBING (ENT): NEMA TC 13
2. BOXES:
- A. SHEET METAL: NEMA OS 1.
- B. CAST METAL: NEMA FB 1, TYPE FD, CAST FRAILLY BOX WITH CASKETED COVER.
- C. HINGED COVER ENCLOSURES: NEMA 250, GALVANIZED STEEL ENCLOSURE WITH CONTINUOUS HINGE COVER, QUICK RELEASE TYPE LATCHES, REMOVABLE INTERIOR PANEL, AND MANUFACTURER'S STANDARD GRAY ENAMEL INSIDE AND OUT.
3. WIRES AND CABLES:
- A. CONDUCTOR MATERIAL: ANNEALED COPPER.
- B. INSULATION: THHN/THWN CONFORMING TO WC 5.
- C. CONDUCTORS #16 AWG AND SMALLER SHALL BE SOLID; CONDUCTORS #14 AWG AND LARGER SHALL BE STRANDED. MC CABLE IS PERMITTED FOR BRANCH CIRCUITRY, AND SHALL UTILIZE SOLID CONDUCTORS.
- D. GROUND CONDUCTORS #10 AWG AND SMALLER SHALL HAVE GREEN THHN/THWN INSULATION.
4. WIRING DEVICES:
- A. GENERAL: COMPLY WITH NEMA WD 1, "GENERAL PURPOSE WIRING DEVICES," COLOR: WHITE, BLACK, GRAY, IVORY, OR BROWN TO BE AS SELECTED BY THE ARCHITECT/ENGINEER AND/OR THE OWNER.
- B. RECEPTACLES: COMPLY WITH UL 498, "ELECTRICAL ATTACHMENT PLUGS AND RECEPTACLES,"
- C. "HEAVY DUTY SPECIFICATION GRADE EXCEPT AS OTHERWISE INDICATED. GROUND FAULT CIRCUIT INTERRUPTER (GFCI) TYPE RECEPTACLES SHALL COMPLY WITH UL 943, "GROUND FAULT CIRCUIT INTERRUPTERS," WITH INTEGRAL NEMA 5-20R DUPLEX RECEPTACLE DESIGNED FOR INSTALLATION IN A 2-3/4" DEEP DEVICE BOX WITHOUT ADAPTER.
- D. TOGGLE SWITCHES: 20A, 120-277V AC, QUIET TYPE, SPECIFICATION GRADE AND SHALL COMPLY WITH UL 20, "GENERAL USE SNAP SWITCHES," THREE-POLE, TWO-POLE, THREE-WAY, AND FOUR-WAY AS INDICATED AND/OR REQUIRED.
- E. DEVICE PLATES: SINGLE AND COMBINATION TYPES WHICH MATCH AND MATCH WITH CORRESPONDING WIRING DEVICES.
- F. MANUFACTURER: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS AS MANUFACTURED BY HUBBELL INC. OR APPROVED EQUAL BY LEVITON.
5. GROUNDING:
- A. GROUNDING AND BONDING PRODUCTS: OF TYPES INDICATED AND/OR OF SIZES AND RATINGS TO COMPLY WITH THE NEC. WHERE TYPES, SIZES, RATINGS, AND QUANTITIES ARE IN EXCESS OF NEC REQUIREMENTS, THE MORE STRINGENT REQUIREMENTS AND THE GREATER SIZE, RATING, AND QUANTITY INDICATIONS SHALL GOVERN. MATCHING NYLON IN ALL AREAS.
- B. CONDUCTOR MATERIAL: COPPER.
- C. WIRE AND CABLE CONDUCTORS: CONFORM TO NEC TABLE 8, EXCEPT AS OTHERWISE INDICATED, FOR CONDUCTOR PROPERTIES, INCLUDING STRANDING.
- D. CONNECTOR PRODUCTS: UL LISTED AND LABELED AS GROUNDING CONNECTORS FOR THE MATERIALS USED.
6. PANELBOARDS:
- A. CIRCUIT BREAKERS: PROVIDE TYPE, RATING, AND FEATURES INDICATED. BOLT-ON EXCEPT WHERE PLUG-IN FOR USE ON EXISTING GALVANIZED PANELBOARDS (NOT BEING UPGRADED). TANDEM CIRCUIT BREAKERS SHALL NOT BE USED. MULTIPLE CIRCUIT BREAKERS SHALL HAVE AN INTERNAL COMMON TRIP AND A SINGLE HANDLE.
- B. ENCLOSURES: NEMA TYPE 1, UNLESS OTHERWISE INDICATED.
- C. FRONT: SECURED TO BOX WITH CONCEALED TRIM CLAMPS EXCEPT AS INDICATED. FRONT SURFACE MOUNTED PANELBOARDS SHALL BE SAME DIMENSIONS AS BOX.
- D. DIRECTORY FRAME: METAL WITH CLEAR PLASTIC COVER MOUNTED ON INSIDE OF PANELBOARD DOOR.
- E. BUS WORK: HARD DRAWN COPPER OF 98% CONDUCTIVITY.
- F. MAIN AND NEUTRAL PLUGS: COMPRESSION TYPE.
- G. EQUIPMENT GROUND BUS: ADEQUATE FOR FEEDER AND BRANCH CIRCUIT EQUIPMENT GROUND.
- H. CONDUCTORS: BONDED TO BOX.
- I. PROVISIONS FOR FUTURE DEVICES: EQUIP WITH MOUNTING BREAKETS, BUS CONNECTION, AND NECESSARY APPURTENANCES. FOR THE CIRCUIT BREAKER AMPERE RATING INDICATED FOR FUTURE INSTALLATION OF DEVICES.
- J. MAIN AND SUFFERED LUGS: PROVIDE WHERE INDICATED.
- K. NAMEPLATE: CUSTOM ENGRAVED PLASTIC LAMINATE, WHITE LETTERS ON BLACK FIELD, FOR EACH PANELBOARD MOUNTED WITH EPOXY OR INDUSTRIAL CEMENT OR ADHESIVE.
- L. MANUFACTURER: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS AS MANUFACTURED BY SQUARE-D, SIEMENS OR CUTLER HAMMER CO.
7. DISCONNECTS AND CIRCUIT BREAKERS:
- A. FUSIBLE SWITCH, 800A AND SMALLER: NEMA KS 1, TYPE HD, CLIPS TO ACCOMMODATE SPECIFIED
- B. FUSES, ENCLOSURE SUITABLE FOR THE ENVIRONMENT WHERE INSTALLED, HANDLE LOCKABLE WITH TWO (2) PAD LOCKS, AND INTERLOCKED WITH COVER IN "CLOSED" POSITION. ENCLOSURES SHALL COMPLY WITH NEMA KS 1, TYPE 1 INDOOR DRY LOCATIONS.
- C. MOLDED CASE CIRCUIT BREAKER: NEWMAN AB 1, HANDLE LOCKABLE WITH TWO (2) PADLOCKS.
- D. FRAME SIZE, TRIP RATING NUMBER OF POLES, AND AUXILIARY DEVICES AS INDICATED. ENCLOSURES SHALL COMPLY WITH NEWMAN AB 1, TYPE 1. INDOOR DRY LOCATIONS. CIRCUIT BREAKERS SHALL HAVE A MINIMUM INTERRUPTING CAPACITY AS FOLLOWS:
- E. MANUFACTURER: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS AS SUITABLE FOR INSTALLATION IN EXISTING PANELS. DISCONNECTS SHALL BE BY SQUARE-D.

STANDARD MOUNTING HEIGHTS

(UNLESS OTHERWISE NOTED)



MOUNTING HEIGHT NOTES:

1. STANDARD MOUNTING HEIGHTS: (COORDINATE WITH ARCH DRAWINGS) ALL MOUNTING HEIGHTS SHALL BE AS INDICATED BY ARCHITECT. IF NOT INDICATED BY ARCHITECT THEN PROVIDE AS NOTED ABOVE.
2. MOUNTING HEIGHTS TO CENTER OF OUTLETS UNLESS OTHERWISE NOTED. IN MASONRY CONSTRUCTION THE ABOVE MOUNTING HEIGHTS SHALL BE USED FOR REFERENCE TO NEAREST BLOCK OR BRICK COURSING.
3. THE ABOVE MOUNTING HEIGHT SHALL BE ADHERED TO UNLESS SPECIFICALLY NOTED OR DETAILED OTHERWISE ON THE DRAWING OR SPECIFICATIONS.
4. INDICATION (+) NEXT TO A DEVICE INDICATES THAT DEVICE IS MOUNTED ABOVE A COUNTER OR CASEWORK. COORDINATE WITH ARCHITECTURAL DETAIL AND CASEWORK CONTRACTOR.
5. 3'-6" FOR ADA COMPLIANT DEVICES VERIFY EXACT HEIGHT PRIOR TO ROUGH IN.

ELECTRICAL NOTES:

1. WIRING METHODS: WIRING SHALL CONSIST NO ROME (NON-METALLIC) OR CABLES AND WIRES INSTALLED IN RGS CONDUIT, EMT, LIQUIDATING FLEXIBLE METAL CONDUIT AND MC CABLES. RACEWAYS SHALL BE CONCEALED WITHIN FINISHED WALLS AND CEILINGS UNLESS OTHERWISE INDICATED. OTHER THAN ROOF PENETRATIONS REQUIRED TO FEED ROOF MOUNTED EQUIPMENT, RACEWAYS WILL NOT BE ROUTED EXPOSED OUTSIDE OF THE BUILDING.
2. RACEWAYS: RACEWAYS SHALL BE PROVIDED WHERE INDICATED AND REQUIRED AND SHALL BE INSTALLED AS SPECIFIED BELOW, UNLESS OTHERWISE INDICATED. MINIMUM RACEWAY SIZE SHALL BE 3/4 IN. RGS CONDUIT SHALL BE USED FOR ALL OUTDOOR INSTALLATIONS. EMT SHALL BE USED FOR ALL INDOOR INSTALLATIONS. LIQUIDATING FLEXIBLE METAL CONDUIT, 6 FT MAXIMUM LENGTH, SHALL BE USED FOR ALL CONDUIT TERMINATIONS AT EQUIPMENT SUBJECT TO VIBRATION, BUSHINGS, MANUFACTURED FITTINGS, OR BOXES PROVIDING EQUIVALENT MEANS OF PROTECTION SHALL BE INSTALLED ON THE ENDS OF ALL CONDUITS. AND SHALL BE OF THE TYPE REQUIRED BY THE N.E.C. ONLY LISTED ADAPTERS SHALL BE USED TO CONNECT EMT TO RGS CONDUIT AND CAST METAL BOXES AND CONDUIT BODIES. PENETRATIONS OF SLABS AND FIRE RATED WALLS SHALL BE FIRESTONE.
- KEEP RACEWAYS AT LEAST 6 IN. AWAY FROM PARALLEL RUNS OF FLUES AND STEAM OR HOT WATER PIPING. INSTALL HORIZONTAL RACEWAY RUNS HIGHER THAN WATER AND STEAM PIPING. RACEWAYS CROSSING STRUCTURAL EXPANSION JOINT SHALL BE PROVIDED WITH SUITABLE EXPANSION FITTINGS OR OTHER SUITABLE MEANS TO COMPENSATE FOR THE BUILDING EXPANSION AND CONTRACTION. RACEWAYS SHALL BE INSTALLED PARALLEL OR PERPENDICULAR TO WALLS, STRUCTURAL MEMBERS AND FEATURES, MECHANICAL DUCT AND PIPING SYSTEMS, OR INTERSECTIONS OF VERTICAL PLANES AND CEILINGS. CHANGES IN DIRECTION OF RUNS SHALL BE ACCOMPLISHED WITH SYMMETRICAL BENDS OR CAST METAL FITTINGS. FILED-MADE ELBOWS AND OFFSETS SHALL BE MADE WITH AN APPROVED HICKEY OR CONDUIT BENDING MACHINE. CRUSHED OR DEFORMED RACEWAY SHALL NOT BE INSTALLED. CARE SHALL BE TAKEN TO PREVENT THE LODGMENT OF DIRT, AND CONSTRUCTION MATERIALS AND DEBRIS IN RACEWAYS. DURING THE COURSE OF CONSTRUCTION, CLOGGED RACEWAYS SHALL BE ENTIRELY FREED OF OBSTRUCTIONS OR SHALL BE REPLACED.
- RGS CONDUIT AND EMT SHALL BE SECURELY AND RIGIDLY FASTENED IN PLACE AT INTERVALS OF NOT MORE THAN 10 FT AND WITHIN 3 FT OF FITTINGS AND BOXES WITH APPROVED PIPE STRAPS, WALL BRACKETS, CONDUIT CLAMPS, CONDUIT HANGERS, THREADED C-CLAMPS, OR CEILING TRAPEZE. C-CLAMPS OR BEAM CLAMPS SHALL HAVE STRAP OR RUD TYPE RETAINERS. LOADS AN SUPPORTS SHALL BE COORDINATED WITH SUPPORTING STRUCTURES TO PREVENT DEFORMATION OR DAMAGE TO STRUCTURES, BUT NO LOAD SHALL BE APPLIED TO JOIST BRIDGING. FASTENINGS SHALL BE BY WOOD SCREWS OR SCREW TYPE NAILS TO WOOD; BY TOGGLE BOLTS ON HOLLOW CMU; BY EXPANSION BOLTS ON CONCRETE OR BRICK; AND BY MACHINE SCREWS, WELDED THREADED STUDS, HEAT TREATED OR SPRING STEEL TENSION CLAMPS ON STEEL WORK. NAIL-TYPE NYLON ANCHORS OR DRIVEN PLUGS OR ANCHORS SHALL BE USED TO FASTEN AND PROVIDED WITH LOCK WASHERS AND NUTS MAY BE USED IN LIEU OF EXPANSION BOLTS OR MACHINE SCREWS. RACEWAYS OR PIPE STRAPS SHALL NOT BE WELDED TO STEEL STRUCTURES. IN PARTITIONS OF LIGHT STEEL CONSTRUCTION, SHEET METAL SCREWS MAY BE USED. CONDUIT SHALL NOT BE SUPPORTED USING WIRE OR NYLON TIES. RACEWAYS SHALL BE INSTALLED AS A COMPLETE SYSTEM AND BE INDEPENDENTLY SUPPORTED FROM THE STRUCTURE. UPPER RACEWAYS SHALL NOT BE THE SUPPORT OF LOWER RACEWAYS. SUPPORTING MAINS WILL NOT BE SHARED BETWEEN ELECTRICAL RACEWAYS AND MECHANICAL DUCTS OR PIPING. MOUNTING HARDWARE SHALL NOT PRESENT SHARP EDGES WHERE PERSONNEL CONTACT IS POSSIBLE. IN MECHANICAL SPACES, "MINERALS" SUPPORTS SHALL NOT BE USED BELOW 10' A.F.F.
3. BOXES: BOXES SHALL BE PROVIDE IN RACEWAY SYSTEMS WHEREVER REQUIRED FOR PULLING OF WIRES, MAKING CONNECTIONS, AND MOUNTING OF DEVICES OR LIGHTING FIXTURES. IN GENERAL, BOXES SHALL BE CONSTRUCTED OF HOT-DIPPED GALVANIZED FINISHED SHEET STEEL. BOXES FOR METALLIC RACEWAYS, 4 IN. BY 4 IN. NOMINAL SIZE AND SMALLER, SHALL BE OF THE CAST METAL HUB TYPE AND CASKETED WHEN LOCATED OUTSIDE OF THE BUILDING. BOXES SHALL BE LISTED AS SUITABLE FOR THE ENVIRONMENTAL CONDITIONS OF THE LOCATION THEY ARE INSTALLED. BOXES FOR MOUNTING OF LIGHTING FIXTURES SHALL BE NOT LESS THAN 4 IN. SQUARE EXCEPT SMALLER BOXES SHALL BE INSTALLED WHERE REQUIRED BY FIXTURE CONFIGURATION. UNLESS OTHERWISE INDICATED, DEVICE BOXES FOR RECEPTACLES SHALL BE MOUNTED WITH THE CENTER OF THE DEVICE BOX APPROXIMATELY 18 IN. AFF. INDICATED. DEVICE BOXES FOR TOGGLE SWITCHES SHALL BE MOUNTED WITH THE CENTER OF THE DEVICE BOX APPROXIMATELY 48 IN. AFF. BOXES AND BOX SUPPORTS SHALL BE FASTENED TO WOOD WITH WOOD SCREWS OR SCREW TYPE NAILS OF EQUAL HOLDING STRENGTH, WITH BOLTS AND METAL EXPANSION SHIELDS ON CONCRETE AND BRICKS. WITH TOGGLE BOLTS ON HOLLOW CMU. ON CONCRETE AND BRICKS, STUDS ON STEEL WORK. THREADED STUDS DRIVEN IN BY POWDER CHARGE AND PROVIDED WITH LOCKWASHERS AND NUTS, OR NAIL TYPE NYLON ANCHORS MAY BE USED IN LIEU OF EXPANSION SHIELDS OR MACHINE SCREWS. HANGERS SHALL NOT BE FASTENED OR SUPPORTED FROM JOIST BRIDGING.
4. WIRES AND CABLES: EXAMINE RACEWAYS AND BUILDING FINISHES TO RECEIVE WIRES AND CABLES FOR COMPLIANCE WITH INSTALLATION TOLERANCES AND OTHER CONDITIONS. DO NOT PROCEED WITH INSTALLATION UNTIL UNSATISFACTORY CONDITIONS HAVE BEEN CORRECTED. PULL WIRES AND CABLES INTO RACEWAY SIMULTANEOUSLY WHERE MORE THAN ONE IS BEING INSTALLED IN THE SAME RACEWAY. USE PULLING COMPOUND OR LUBRICANT WHERE NECESSARY. COMPOUND USED MUST NOT DEGRADATE CONDUCTORS OR INSULATION. USE PULLING MEANS, INCLUDING FISH TAPE, CABLE, ROPE, AND BASKET-WEAVE WIRE/CABLE GRIPS THAT WILL NOT DAMAGE WIRES/CABLES OR RACEWAY. INSTALL EXPOSED CABLE PARALLEL AND PERPENDICULAR TO WALLS, STRUCTURAL MEMBERS AND FEATURES, MECHANICAL DUCT AND PIPING SYSTEMS, OR INTERSECTIONS OF VERTICAL PLANES AND CEILING. HORIZONTAL RUNS OF MC CABLE SHALL BE SUPPORTED ON 3 FT MAXIMUM CENTERS. VERTICAL RUNS OF MC CABLES SHALL BE SUPPORTED ON 6 FT MAXIMUM CENTERS EXPOSED TO VIEW. ALL CABLES SHALL BE SUPPORTED ON 3 FT MAXIMUM CENTERS. THE NUMBER OF SPICES SHALL BE KEPT TO AN ABSOLUTE MINIMUM. WIRING AT EACH OUTLET SHALL BE INSTALLED WITH AT LEAST 8 IN. SLACK.

5. WIRING DEVICES: INSTALL WIRING DEVICES WHERE INDICATED IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION, INSTRUCTION APPLICABLE REQUIREMENTS OF THE NEC, AND RECOGNIZED INDUSTRY PRACTICES. INSTALL WIRING DEVICES IN DEVICE BOXES WHICH ARE CLEAN AND FREE FROM DIRT AND CONSTRUCTION MATERIALS AND DEBRIS. INSTALL WIRING DEVICES AFTER WIRING WORK IS COMPLETE. INSTALL DEVICE PLATES AFTER PAINTING WORK IS COMPLETE. TIGHTEN CONNECTORS AND TERMINALS, INCLUDING SCREWS AND BOLTS, IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED TORQUE-TIGHTENING VALUES. PRIOR TO EMERGING CIRCUITS, TEST WIRING FOR ELECTRICAL CONTINUITY AND SHORTS. ENSURE PROPER POLARITY OF CONNECTIONS IS MAINTAINED. SUBSEQUENT TO EMERGING, TEST WIRING DEVICES AND DEMONSTRATE COMPLIANCE WITH REQUIREMENTS.
6. GROUNDING: ELECTRICAL SYSTEMS AND EQUIPMENT, METALLIC RACEWAYS AND BOXES, CABLE SHIELDS, METALLIC CABLE SHEATHS AND ARMOR, AND OTHER NON-CURRENT CARRYING METALLIC PARTS OF EQUIPMENT SHALL BE GROUNDED IN CONFORMANCE WITH THE NEC. EQUIPMENT GROUND CONDUCTORS SHALL COMPLY WITH NEC ARTICLE 250 FOR SIZES AND QUANTITIES, EXCEPT WHERE LARGER SIZES AND/OR MORE CONDUCTORS ARE INDICATED. PROVIDE SEPARATE INSULATED GROUND CONDUCTOR IN ALL RACEWAYS, REGARDLESS OF RACEWAY TYPE. SEPARATELY DERIVED SYSTEMS AS DEFINED BY THE NEC SHALL BE GROUNDED IN CONFORMANCE WITH NEC ARTICLE 250 PARA. 26. TERMINATE EQUIPMENT GROUND WIRES FOR FEEDERS AND BRANCH CIRCUITS WITH PRESSURE TYPE GROUND LUGS. WHERE METALLIC CONDUITS TERMINATE AT METALLIC HOUSINGS WITHOUT MECHANICAL AND ELECTRICAL CONNECTION TO HOUSING, TERMINATE EACH CONDUIT WITH A GROUND BUSHING. TERMINATE ELECTRICAL BUSHINGS WITH A GROUND WIRE. TO THE GROUND BUS IN THE HOUSING. BOND ELECTRICALLY NONCONDUCTING CONDUITS AT BOTH ENTRANCES AND EXITS WITH GROUNDING BUSHINGS AND GROUND WIRES. TIGHTEN GROUNDING AND BONDING CONNECTORS AND TERMINALS, INCLUDING SCREWS AND BOLTS, IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED TORQUE-TIGHTENING VALUES.
7. PANELBOARDS: INSTALL PANELBOARDS AND ACCESSORY ITEMS IN ACCORDANCE WITH NEMA PB 1.1, "GENERAL INSTRUCTIONS FOR PROPER INSTALLATION, OPERATION, AND MAINTENANCE OF PANELBOARDS RATED 600 VOLTS OR LESS," AND MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. MOUNT PANELBOARDS PLUMB AND RIGID WITHOUT DISTORTION OF BOX AND WITH THE TOP OF THE TRIM AT 78 IN. AFF. UNLESS OTHERWISE INDICATED. PROVIDE NEATLY TYPED AND ACCURATE CIRCUIT DIRECTORIES IN EACH PANELBOARD, REFLECTIVE OF FINAL CIRCUIT CONFIGURATION. PROVIDE FILLER PLATES IN ALL UNUSED SPACES. TRAIN WIRES IN PANELBOARDS GUTTERS NEATLY IN GROUPS, BUNDLE, AND WRAP WITH WIRE TIES. GROUND PANELBOARDS IN CONFORMANCE WITH THE NEC. TIGHTEN ELECTRICAL CONNECTORS AND TERMINALS, INCLUDING GROUNDING CONNECTIONS, IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED TORQUE-TIGHTENING VALUES. PERFORM INSULATION RESISTANCE TESTS OF PANELBOARD BUSES, COMPONENTS, AND FEEDER AND BRANCH CIRCUIT WIRING; INSULATION RESISTANCE LESS THAN 100 MEGOHM IS UNACCEPTABLE.
8. DISCONNECTS AND CIRCUIT BREAKERS: PROVIDE DISCONNECTS AND CIRCUIT BREAKERS WHERE INDICATED ON THE ELECTRICAL DRAWINGS AND/OR WHERE REQUIRED BY THE NEC, WHETHER INDICATED ON THE ELECTRICAL DRAWINGS OR NOT. INSTALL DISCONNECTS AND CIRCUIT BREAKERS PLUMB AND LEVEL AND IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. UPON COMPLETION OF INSTALLATION OF DISCONNECTS AND CIRCUIT BREAKERS, ENERGIZE CIRCUITS AND DEMONSTRATE CAPABILITY AND COMPLIANCE WITH REQUIREMENTS. EXCEPT AS OTHERWISE INDICATED, DO NOT DEMONSTRATE DISCONNECTS AND CIRCUIT BREAKERS BY OPERATING THEM UNDER LOAD; HOWEVER, DEMONSTRATE DISCONNECT AND CIRCUIT BREAKERS OPERATION THROUGH SIX OPENING/CLOSING CYCLES WITH CIRCUIT UNLOADED. OPEN DISCONNECT AND CIRCUIT BREAKER ENCLOSURES FOR INSPECTION OF INTERIOR, MECHANICAL AND ELECTRICAL CONNECTIONS, FUSE INSTALLATION IF APPLICABLE, AND FOR VERIFICATION OF TYPE AND RATING OF FUSES INSTALLED IN APPLICABLE. CORRECT DEFICIENCIES THEN RETEST TO DEMONSTRATE COMPLIANCE WITH REQUIREMENTS. REMOVE AND REPLACE DEFECTIVE UNITS WITH NEW UNITS AND RETEST.
9. LIGHTING FIXTURES: INSTALL FIXTURES WHERE, AND AT HEIGHTS, INDICATED IN ACCORDANCE WITH FIXTURE MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS, REQUIREMENTS OF THE NEC, AND RECOGNIZED INDUSTRY PRACTICES. TIGHTEN ELECTRICAL CONNECTORS AND TERMINALS, INCLUDING GROUND CONNECTIONS, IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED TORQUE-TIGHTENING VALUES. RECESSED OR SEMI RECESSED FIXTURES MAY BE SUPPORTED BY CEILING SUPPORT SYSTEM. INSTALL CEILING SUPPORT SYSTEM RODS OR WIRES AT A MINIMUM OF FOUR (4) RODS OR WIRES PER FIXTURE LOCATED NOT MORE THAN 6 IN. FROM FIXTURE CORNERS. FIXTURES WHICH ARE SMALLER THAN CEILING GRID SHALL BE CENTERED IN ACOUSTICAL CEILING PANEL AND SUPPORTED BY AT LEAST TWO (2) 5/4 IN. METAL CHANNELS SPANNING AND SECURED TO CEILING SYSTEM GRID TEES. FIXTURES WHICH LAY-IN CEILING GRID SYSTEM SHALL BE SECURED IN PLACE BY INSTALLATION OF CLIPS WHICH SECURELY FASTEN FIXTURE TO CEILING GRID TEES. SUPPORT SURFACE MOUNT FIXTURES GREATER THAN 2 FT IN LENGTH AT A POINT IN ADDITION TO THE OUTLET BOX FIXTURE STUD. UPON COMPLETION OF INSTALLATION AND JUST PRIOR TO DEMONSTRATION CLEAN AND RELAMP FIXTURES. LAMP FIXTURES WITH SPECIFIED LAMPS IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTRUCTIONS. UPON COMPLETION OF INSTALLATION, DEMONSTRATE CAPABILITY AND COMPLIANCE WITH REQUIREMENTS. WHERE POSSIBLE, CORRECT MALFUNCTIONING FIXTURES AT THE SITE, THEN RETEST TO DEMONSTRATE COMPLIANCE; OTHERWISE, REMOVE MALFUNCTIONING UNITS AND REPLACE WITH NEW UNITS AND PROCEED WITH RETESTING.

OWNER SIGNATURE

REVISION STATUS

Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS

APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

ELECTRICAL


PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:

NOTES

DRAWN BY:	CHECKED BY:	DATE:
A.S	S.A	02 JUL 2023
JOB NO	SHT NO	SCALE:
632	EL-01	NTS @A3

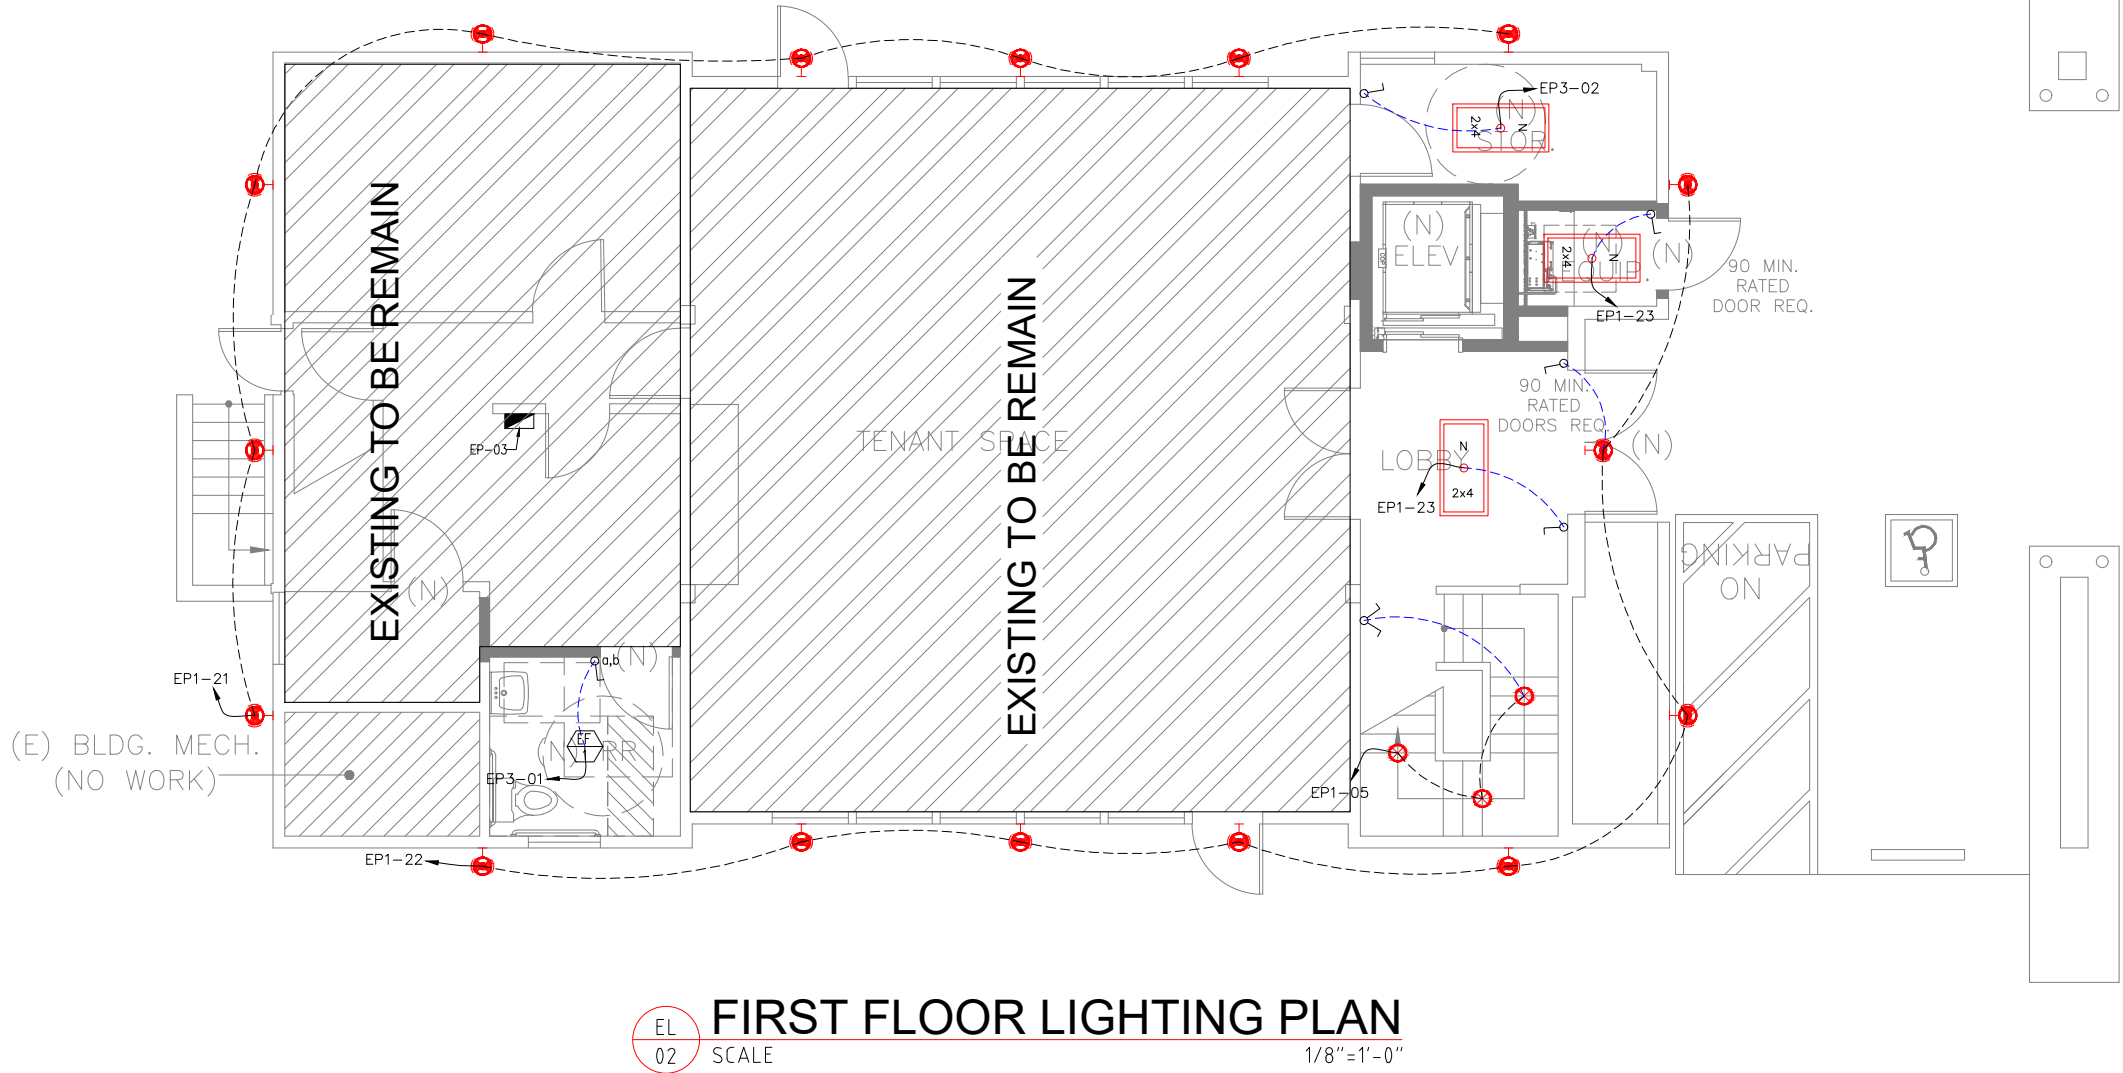

GENERAL ELECTRICAL NOTES
1- ELECTRICAL CONTRACTOR TO VERIFY ALL EXISTING SITE CONDITIONS & MAKE ANY NECESSARY ADJUSTMENTS.
2- SMALLEST WIRE & SIZE TO BE 14-2
3- ALL WORK SHALL COMPLY WITH THE NATIONAL ELECTRIC CODE & ANY OTHER APPLICABLE REGULATIONS OR CODES, AT THE SITE.
4- CONTRACTOR TO LOCATE PHONE, CABLE, ETC. AS PER OWNER'S SPECIFICATIONS.

LEGEND NOTES:
T VERIFY ALL MOUNTING HEIGHTS OF WALL MOUNTED LIGHT FIXTURES
P TYPICAL MOUNTING HEIGHTS FOR OUTLETS - CENTERLINE 16" AFF (EXCEPT WHERE NOTED OTHERWISE)
\$ MAXIMUM HEIGHT FOR ALL SWITCHES IS 48" AFF
\$ ROCKER STYLE SWITCHES
ALL SWITCHES /OUTLETS /COVER PLATES- WHITE FINISH
F VENT FANS SIZED FOR ROOM VOLUME
FAN SOUND LEVEL NOT TO EXCEED 1.0 SONES

: LEGEND :		
NO	SYMBOL	DESCRIPTION
03		15W SURFACE MOUNTED LIGHT IN STAIRS
02		15W SURFACE MOUNTED LIGHT IN CORRIDOR
03		20W RECESS TYPE DOWN LIGHT WITH SPIN ALUMINUM BODY REFLECTOR, GLASS DIFFUSER & COMPACT FLU. LAMP IN BATHROOMS & LAUNDRY AREA
01		LED LIGHTING
		EMERGENCY LIGHTING
		PENDANT LIGHT FOR OPTIONAL DESK AND WINDOW DISPLAYS
		EXISTING OUTLET -WILL USE FOR LARGE OVERHEAD DIMMABLE LED LIGHTS
		THIS MEANS IT A NEW LOCATION THAT NEED A WIRING PLAN, WILL USE FIXTURE THAT EXIST AND CONVERT THEN TO DIMMABLE LED
		MEANS CONVERTING THE CURRENT LAMPS TO LED DIMMABLE AND WILL STAY IN PLACE EXISTING
07		20W WEATHER PROOF OUTDOOR WALL MOUNTED EXTERIOR LIGHTING IS EXISTING.
16		LIGHT WILL BE INTEGRATED INTO THE AIR VENT
17		ONE WAY ONE GANG SWITCH
		ONE WAY TWO GANG SWITCH
		ONE WAY THREE GANG SWITCH
		TWO WAY ONE GANG SWITCH
		TWO WAY TWO GANG SWITCH
		ELECTRICAL PANEL BOARD, TYPE INDICATED.

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:


DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
ELECTRICAL

PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
FIRST FLOOR LIGHTING PLAN

DRAWN BY: A.S	CHECKED BY: S.A	DATE: 02 JUL 2023
JOB NO 632	SHT NO EL-02	SCALE: 1/8"=1'-0" @A3

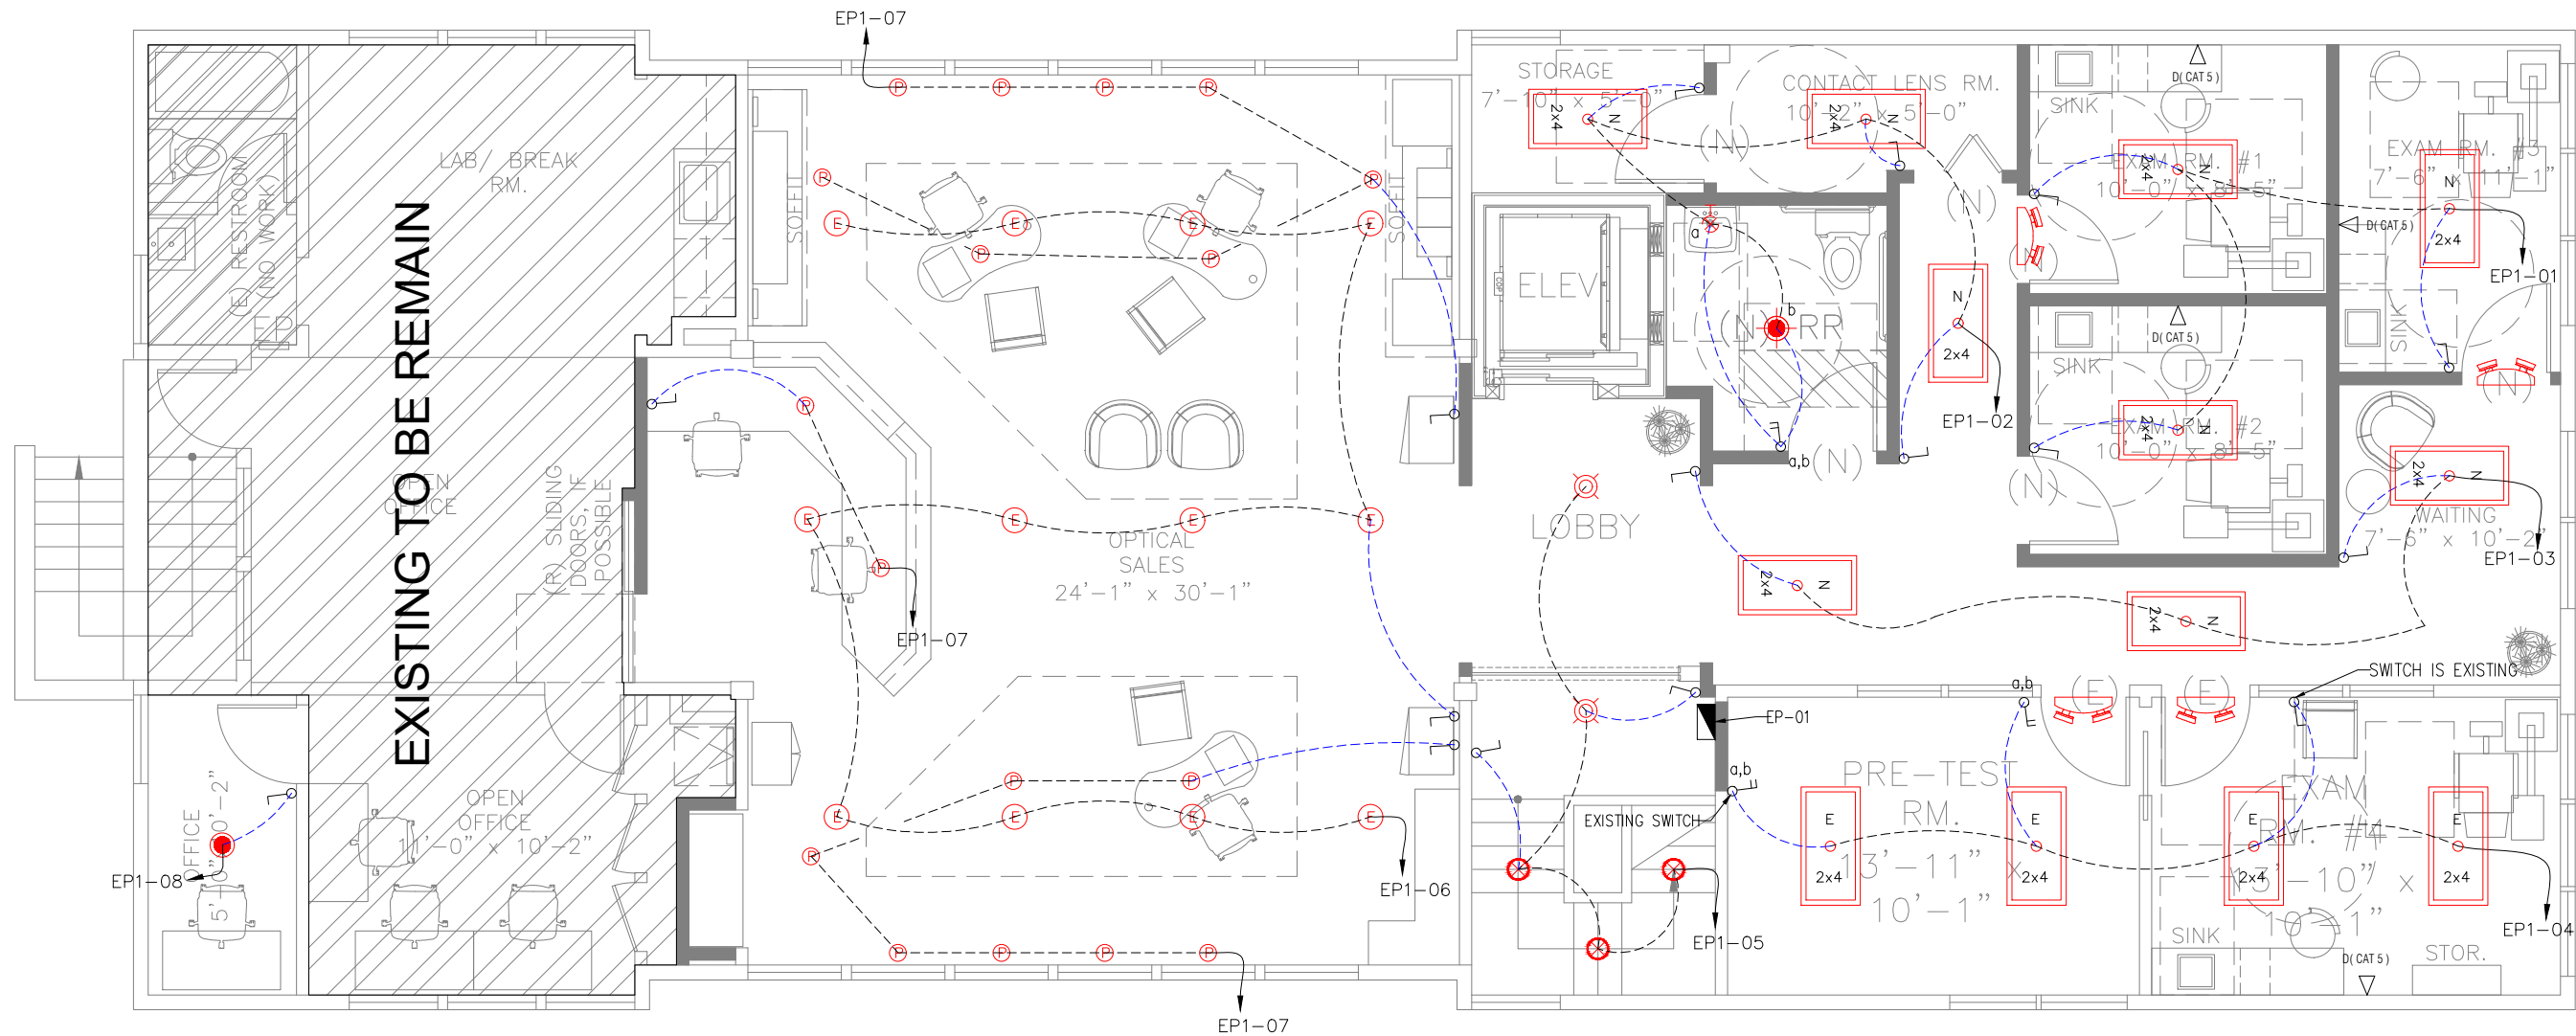

EL 03

SCALE

SECOND FLOOR LIGHTING PLAN

3/16"=1'-0"

GENERAL ELECTRICAL NOTES
1- ELECTRICAL CONTRACTOR TO VERIFY ALL EXISTING SITE CONDITIONS & MAKE ANY NECESSARY ADJUSTMENTS.
2- SMALLEST WIRE & SIZE TO BE 14-2
3- ALL WORK SHALL COMPLY WITH THE NATIONAL ELECTRIC CODE & ANY OTHER APPLICABLE REGULATIONS OR CODES, AT THE SITE.
4- CONTRACTOR TO LOCATE PHONE, CABLE, ETC. AS PER OWNER'S SPECIFICATIONS.

LEGEND NOTES:
⌚ VERIFY ALL MOUNTING HEIGHTS OF WALL MOUNTED LIGHT FIXTURES
⌚ TYPICAL MOUNTING HEIGHTS FOR OUTLETS - CENTERLINE 16" AFF (EXCEPT WHERE NOTED OTHERWISE)
\$ MAXIMUM HEIGHT FOR ALL SWITCHES IS 48" AFF
\$ ROCKER STYLE SWITCHES
ALL SWITCHES /OUTLETS /COVER PLATES- WHITE FINISH
⌚ VENT FANS SIZED FOR ROOM VOLUME
FAN SOUND LEVEL NOT TO EXCEED 1.0 SONES

: LEGEND :		
NO	SYMBOL	DESCRIPTION
03		15W SURFACE MOUNTED LIGHT IN STAIRS
02		15W SURFACE MOUNTED LIGHT IN CORRIDOR
02		20W RECESS TYPE DOWN LIGHT WITH SPIN ALUMINUM BODY REFLECTOR, GLASS DIFFUSER & COMPACT FLU. LAMP IN BATHROOMS & LAUNDRY AREA.
01		LED LIGHTING
01		EMERGENCY LIGHTING
17		PENDANT LIGHT FOR OPTIONAL DESK AND WINDOW DISPLAYS
		EXISTING OUTLET -WILL USE FOR LARGE OVERHEAD DIMMABLE LED LIGHTS
04		THIS MEANS IF A NEW LOCATION THAT NEED A WIRING PLAN. WILL USE FIXTURE THAT EXIST AND CONVERT THEN TO DIMMABLE LED
09		MEANS CONVERTING THE CURRENT LAMPS TO LED DIMMABLE AND WILL STAY IN PLACE EXISTING
		20W WEATHER PROOF OUTDOOR WALL MOUNTED EXTERIOR LIGHTING IS EXISTING.
		LIGHT WILL BE INTEGRATED INTO THE AIR VENT
		ONE WAY ONE GANG SWITCH
		ONE WAY TWO GANG SWITCH
		ONE WAY THREE GANG SWITCH
		TWO WAY ONE GANG SWITCH
		TWO WAY TWO GANG SWITCH
		ELECTRICAL PANEL BOARD, TYPE INDICATED.

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:


DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
ELECTRICAL

PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
SECOND FLOOR LIGHTING PLAN

DRAWN BY: A.S	CHECKED BY: S.A	DATE: 02 JUL 2023
JOB NO 632	SHT NO EL-03	SCALE: 3/16"=1'-0" @A3

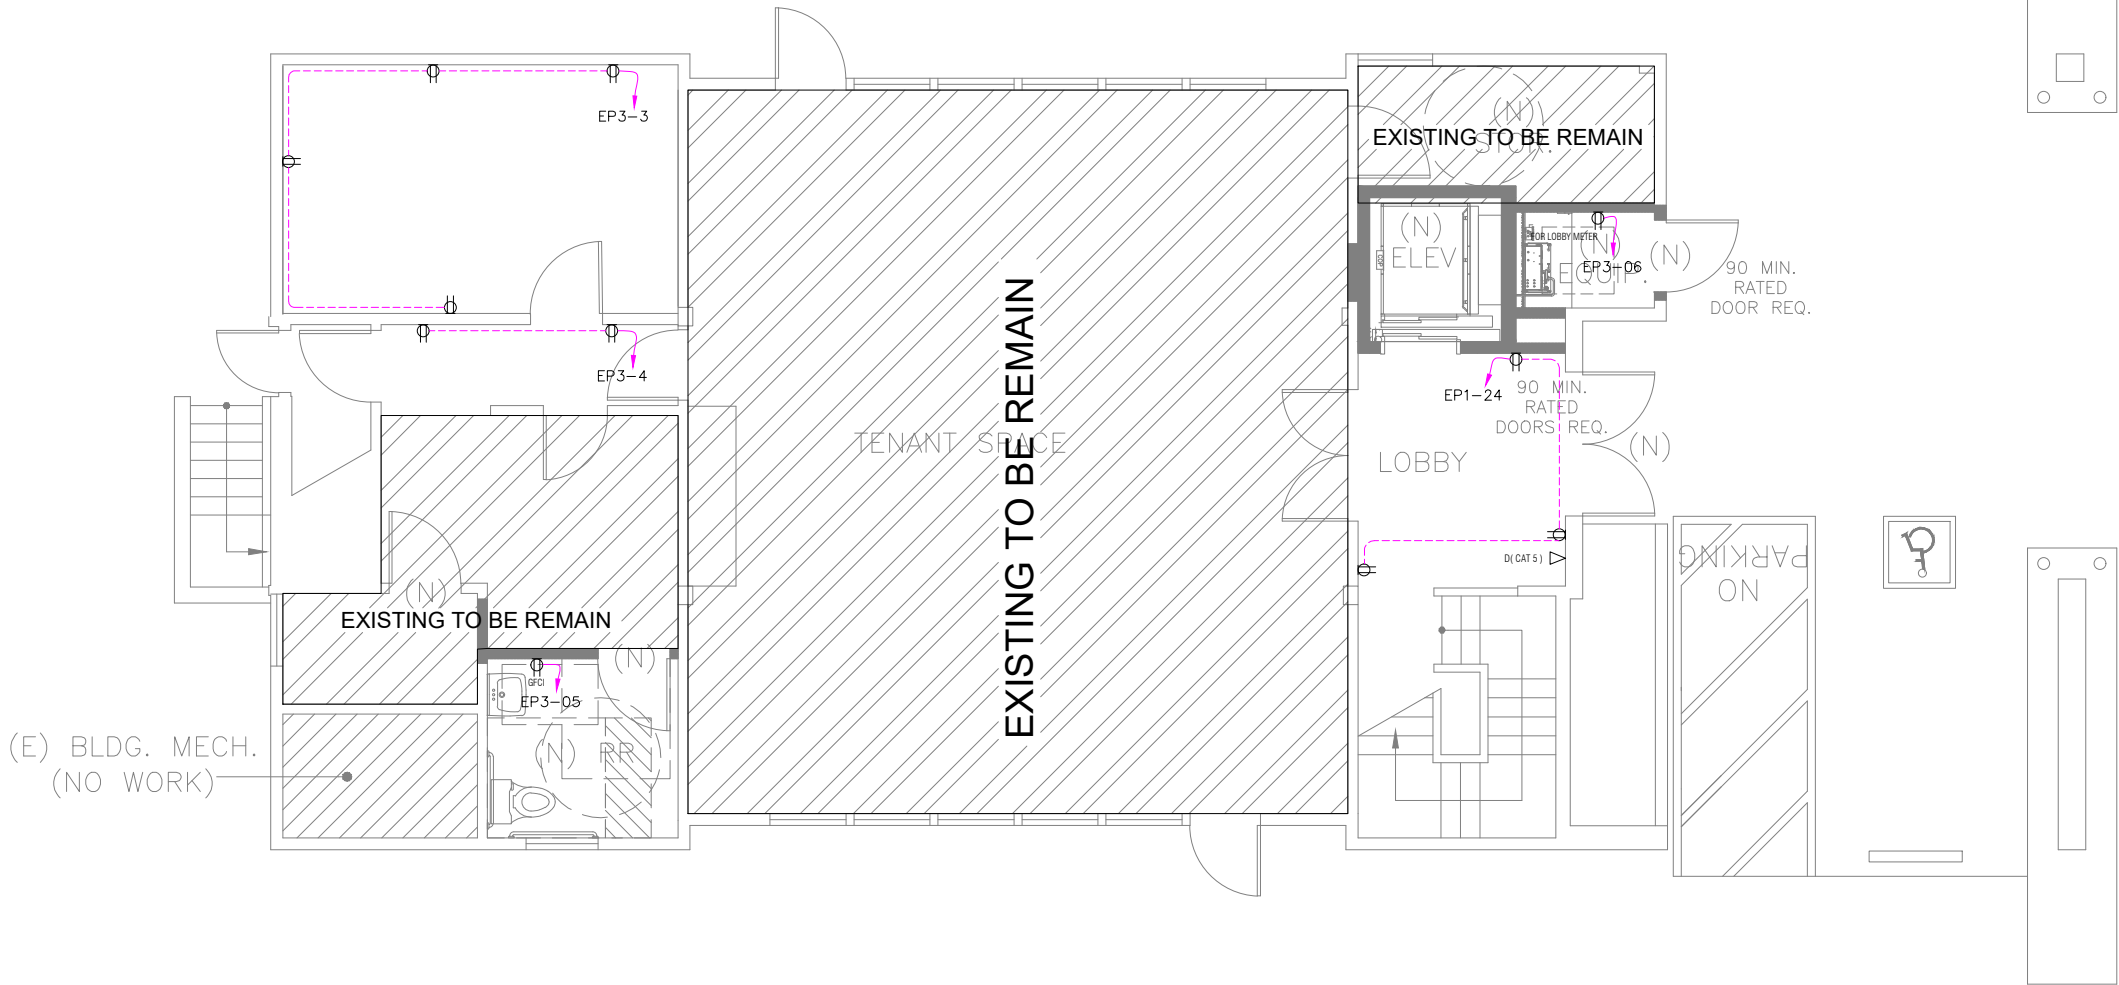

EL 04 FIRST FLOOR POWER PLAN
SCALE 1/8"=1'-0"

GENERAL ELECTRICAL NOTES
1- ELECTRICAL CONTRACTOR TO VERIFY ALL EXISTING SITE CONDITIONS & MAKE ANY NECESSARY ADJUSTMENTS.
2- SMALLEST WIRE & SIZE TO BE 14-2
3- ALL WORK SHALL COMPLY WITH THE NATIONAL ELECTRIC CODE & ANY OTHER APPLICABLE REGULATIONS OR CODES, AT THE SITE.
4- CONTRACTOR TO LOCATE PHONE, CABLE, ETC. AS PER OWNER'S SPECIFICATIONS.

LEGEND NOTES:
T VERIFY ALL MOUNTING HEIGHTS
OF WALL MOUNTED LIGHT FIXTURES


Φ TYPICAL MOUNTING HEIGHTS FOR
OUTLETS - CENTERLINE 16" AFF
(EXCEPT WHERE NOTED OTHERWISE)

\$ MAXIMUM HEIGHT FOR ALL SWITCHES IS 48" AFF
ROCKER STYLE SWITCHES
ALL SWITCHES /OUTLETS /COVER PLATES- WHITE FINISH

⚡ VENT FANS SIZED FOR ROOM VOLUME
FAN SOUND LEVEL NOT TO EXCEED 1.0 SONES

: LEGEND :	
SYMBOL	DESCRIPTION
⊕	SINGLE SOCKET OUTLET, 13A, 230V, GROUNDING TYPE, MOUNT AT 42" A.F.F. UNLESS NOTED OTHERWISE.
⊕	DUPLEX SOCKET OUTLET, 13A, 230V, GROUNDING TYPE, MOUNT AT 18" A.F.F. UNLESS NOTED OTHERWISE.
⊕	GFI DUPLEX SOCKET OUTLET, WEATHER PROOF, 13A, 230V, GROUNDING TYPE, MOUNT AT 42" A.F.F. UNLESS NOTED OTHERWISE.
⊕	POINT FOR KITCHEN HOT PLATE, 32A, GROUNDING TYPE, MOUNT AT 42" A.F.F. UNLESS NOTED OTHERWISE.
TV	TV SOCKET HEIGHT AS PER LCD ON LOCATION
∇	DATA OUTLET. PROVIDE SINGLE GANG JUNCTION BOX WITH PLASTER RING. STUB UP 1" E.C WITH PULL STRING INTO ACCESSIBLE CEILING SPACE. MOUNT AT 18" A.F.F. UNLESS NOTED OTHERWISE.
⊕	FLOOR BOX

EP ELECTRICAL PANEL



OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:


DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
ELECTRICAL

PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
FIRST FLOOR POWER PLAN

DRAWN BY: A.S	CHECKED BY: S.A	DATE: 02 JUL 2023
JOB NO 632	SHT NO EL-04	SCALE: 1/8"=1'-0" @A3

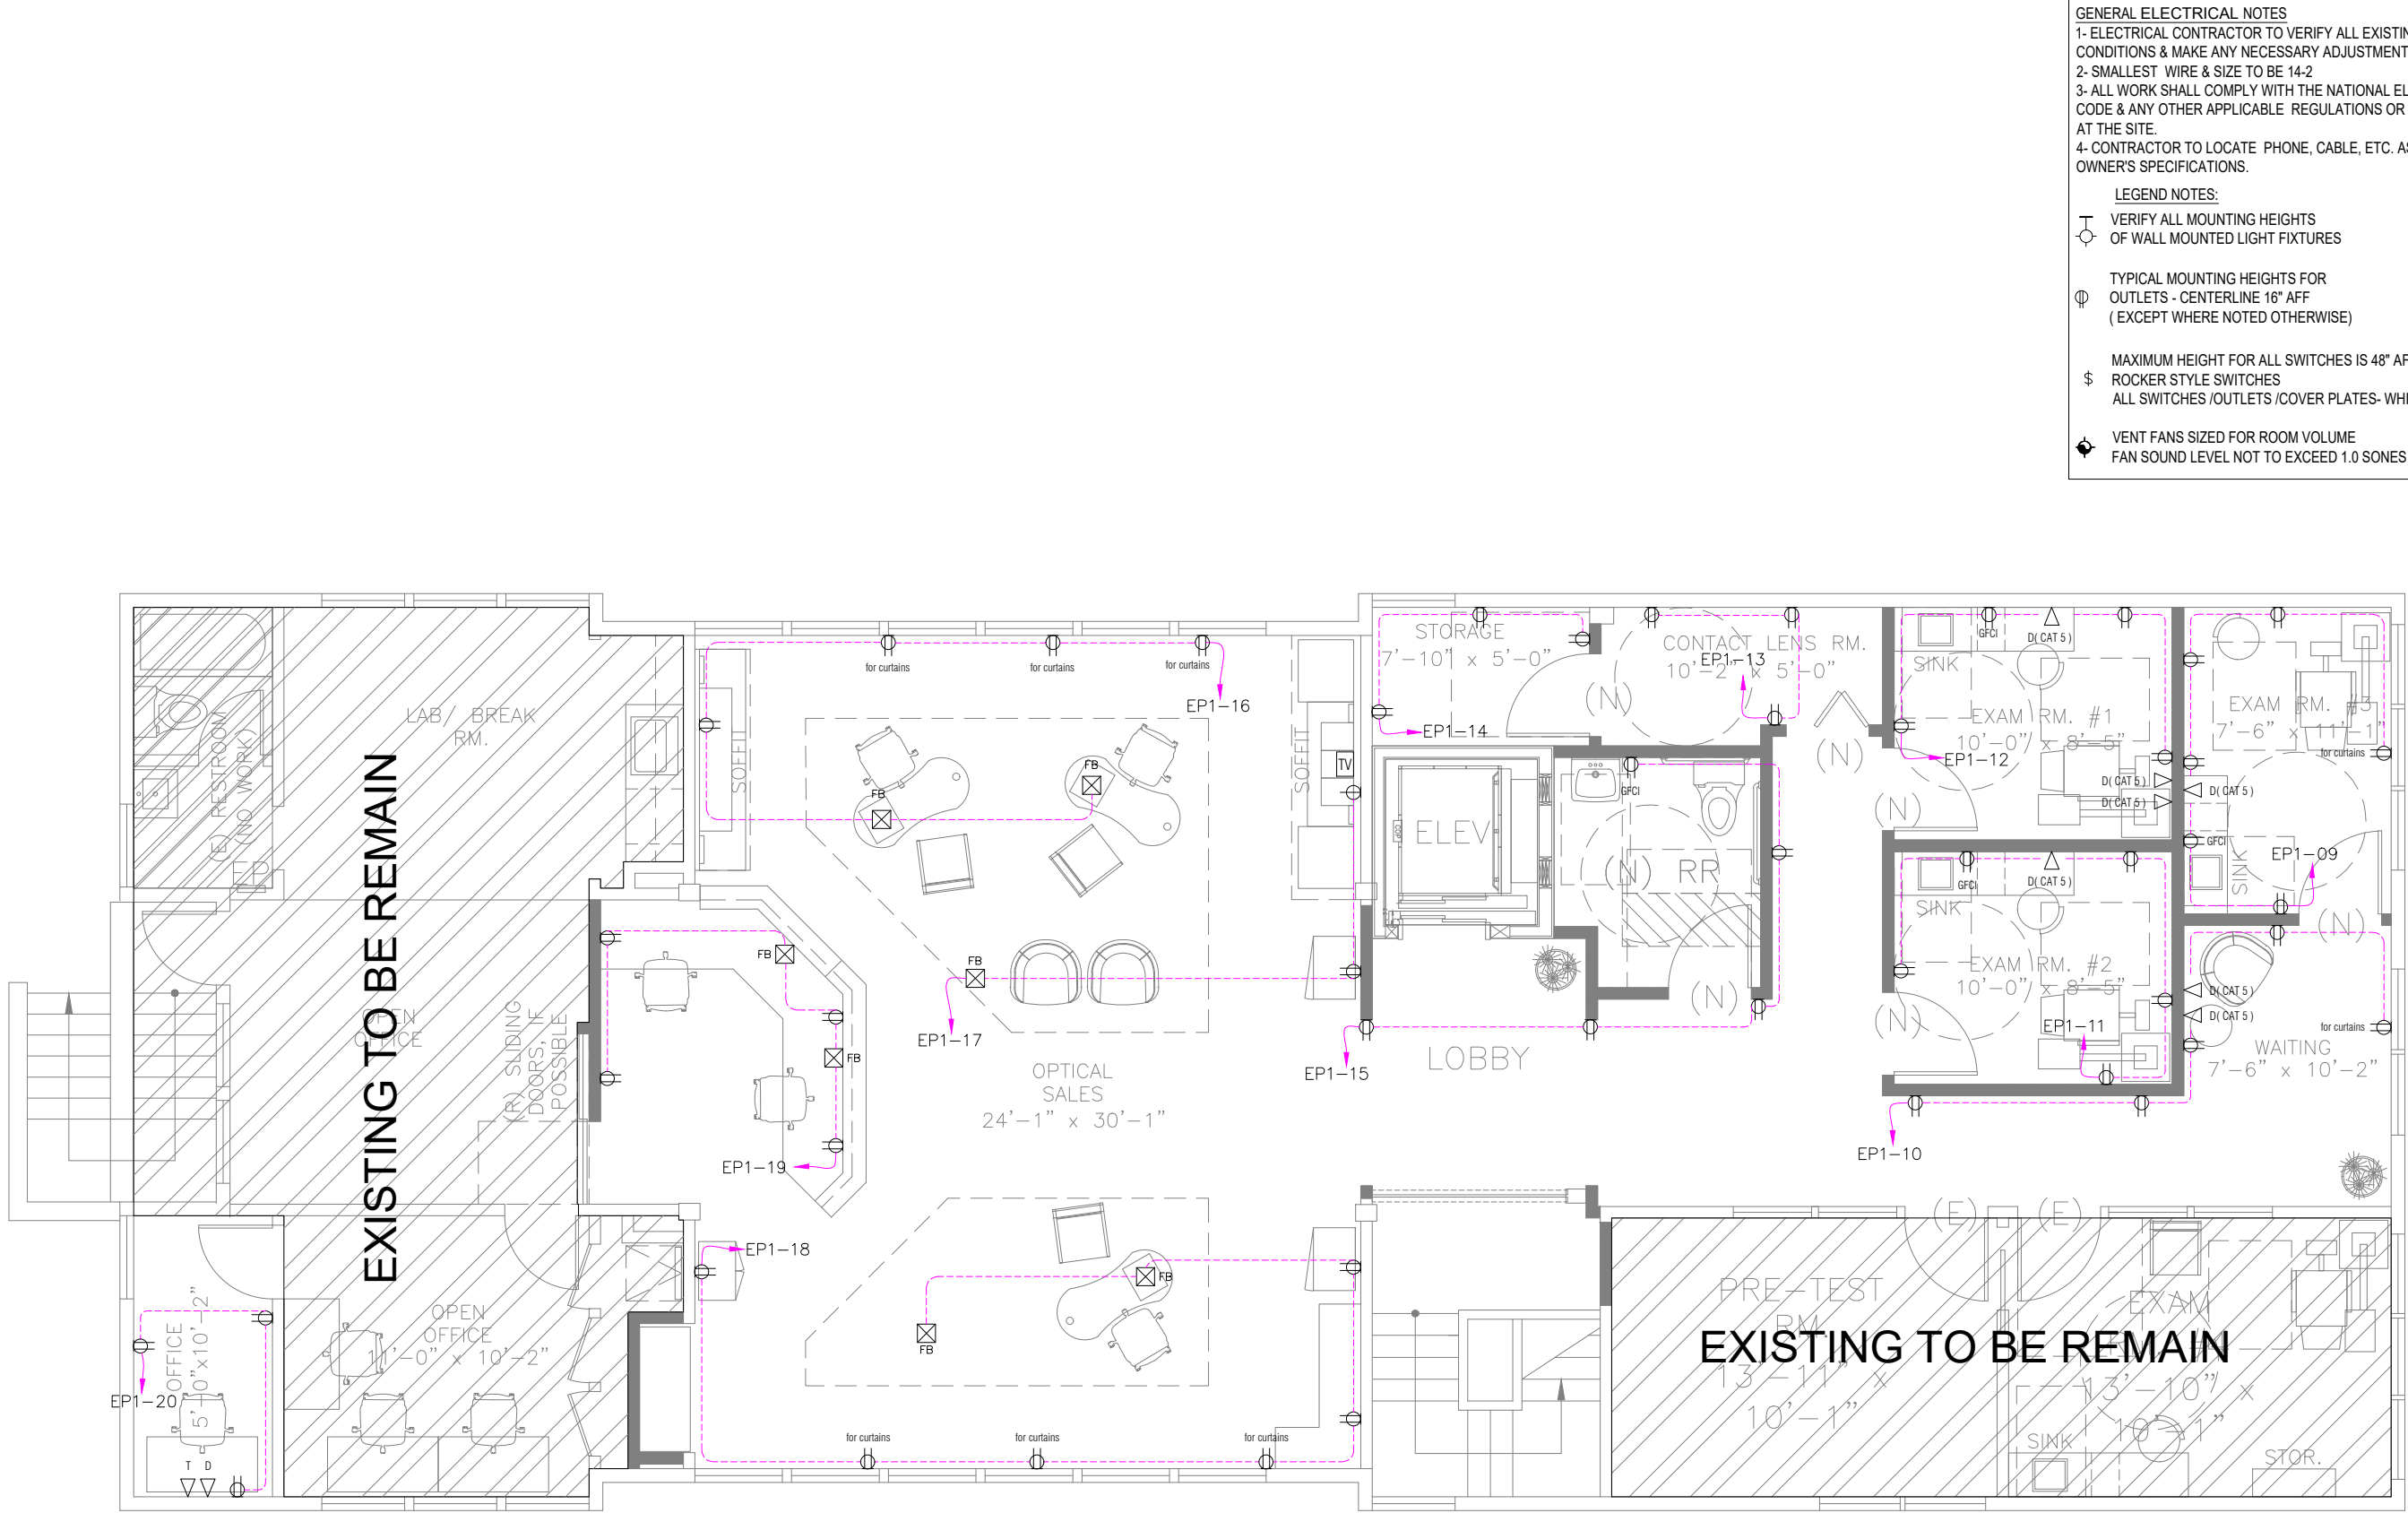

- GENERAL ELECTRICAL NOTES
- 1- ELECTRICAL CONTRACTOR TO VERIFY ALL EXISTING SITE CONDITIONS & MAKE ANY NECESSARY ADJUSTMENTS.
 - 2- SMALLEST WIRE & SIZE TO BE 14-2
 - 3- ALL WORK SHALL COMPLY WITH THE NATIONAL ELECTRIC CODE & ANY OTHER APPLICABLE REGULATIONS OR CODES, AT THE SITE.
 - 4- CONTRACTOR TO LOCATE PHONE, CABLE, ETC. AS PER OWNER'S SPECIFICATIONS.
- LEGEND NOTES:
- ⊕ VERIFY ALL MOUNTING HEIGHTS OF WALL MOUNTED LIGHT FIXTURES
 - ⊕ TYPICAL MOUNTING HEIGHTS FOR OUTLETS - CENTERLINE 16" AFF (EXCEPT WHERE NOTED OTHERWISE)
 - \$ MAXIMUM HEIGHT FOR ALL SWITCHES IS 48" AFF
 - \$ ROCKER STYLE SWITCHES
 - \$ ALL SWITCHES /OUTLETS /COVER PLATES- WHITE FINISH
 - ⊕ VENT FANS SIZED FOR ROOM VOLUME
 - ⊕ FAN SOUND LEVEL NOT TO EXCEED 1.0 SONES

: LEGEND :	
SYMBOL	DESCRIPTION
⊕	SINGLE SOCKET OUTLET, 13A, 230V, GROUNDING TYPE, MOUNT AT 42" A.F.F. UNLESS NOTED OTHERWISE.
⊕	DUPLEX SOCKET OUTLET, 13A, 230V, GROUNDING TYPE, MOUNT AT 18" A.F.F. UNLESS NOTED OTHERWISE.
⊕	GFCI DUPLEX SOCKET OUTLET, WEATHER PROOF, 13A, 230V, GROUNDING TYPE, MOUNT AT 42" A.F.F. UNLESS NOTED OTHERWISE.
⊕	POINT FOR KITCHEN HOT PLATE, 32A, GROUNDING TYPE, MOUNT AT 42" A.F.F. UNLESS NOTED OTHERWISE.
TV	TV SOCKET HEIGHT AS PER LCD ON LOCATION
⊕	DATA OUTLET. PROVIDE SINGLE GANG JUNCTION BOX WITH PLASTER RING. STUB UP 1" E.C. WITH PULL STRING INTO ACCESSIBLE CEILING SPACE. MOUNT AT 18" A.F.F. UNLESS NOTED OTHERWISE.
⊕	FLOOR BOX

EP ELECTRICAL PANEL

FB

⊕ DUPLEX

⊕ DATA OUTLET

⊕ SPARE

⊕ TELEPHONE OUTLET

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS

APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
ELECTRICAL

PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
SECOND FLOOR POWER PLAN

DRAWN BY: A.S	CHECKED BY: S.A	DATE: 02 JUL 2023
JOB NO 632	SHT NO EL-05	SCALE: 3/16"=1'-0" @A3


EL
05
SCALE
SECOND FLOOR POWER PLAN
3/16"=1'-0"

PANEL BOARD SCHEDULE																			
PANEL TAG:		EP-01								MAINS: 100AT/160AF,110/120V,3P,60HZ								NEUTRAL: YES	
LOCATION:		FLOOR PLAN								MOUNTING: SURFACE MOUNTED								GROUND: YES	
ENCLOSURE:		IP42								VOLTAGE 110/120V,3P,4W									
FEEDER ENTRANCE:		TOP								ELEVATOR: 208/230V,3P,4W									
LOAD SERVED	WIRE & CONDUIT SIZE (INCH)	LOAD (VA)			C B	P O L E	C K T N O	R	Y	B	C K T N O	P O L E	C B	LOAD (VA)			WIRE & CONDUIT SIZE (INCH)	LOAD SERVED	
		ØA	ØB	ØC										ØA	ØB	ØC			
LIGHTING	#12 ROMEX WIRE	300.00			20	1P	1				2	1P	20	340.00			#12 ROMEX WIRE	LIGHTING	
LIGHTING	#12 ROMEX WIRE		300.00		20	1P	3				4	1P	20		400.00		#12 ROMEX WIRE	LIGHTING	
LIGHTING	#12 ROMEX WIRE			100.00	20	1P	5				6	1P	20			240.00	#12 ROMEX WIRE	LIGHTING	
LIGHTING	#12 ROMEX WIRE	340.00			20	1P	7				8	1P	20	40.00			#12 ROMEX WIRE	LIGHTING	
LIGHTING	#12 ROMEX WIRE		1200.00		20	1P	9				10	1P	20		1000.00		#12 ROMEX WIRE	LIGHTING	
LIGHTING	#12 ROMEX WIRE			1000.00	20	1P	11				12	1P	20			800.00	#12 ROMEX WIRE	RECEPTACLE	
RECEPTACLE	#12 ROMEX WIRE	600.00			20	1P	13				14	1P	20	600.00			#12 ROMEX WIRE	RECEPTACLE	
RECEPTACLE	#12 ROMEX WIRE		1000.00		20	1P	15				16	1P	20		1200.00		#12 ROMEX WIRE	RECEPTACLE	
RECEPTACLE	#12 ROMEX WIRE			600.00	20	1P	17				18	1P	20			1400.00	#12 ROMEX WIRE	RECEPTACLE	
RECEPTACLE	#12 ROMEX WIRE	1200.00			20	1P	19				20	1P	20	600.00			#12 ROMEX WIRE	RECEPTACLE	
RECEPTACLE	#12 ROMEX WIRE		1600.00		20	1P	21				22	1P	20		400.00		#12 ROMEX WIRE	RECEPTACLE (ELEVATOR)	
RECEPTACLE	#12 ROMEX WIRE			100.00	20	1P	23				24	1P	15			115.00	#12 ROMEX WIRE	Car Lighting	
electric water tanks	2#8 ROMEX-1#10ROM-3/4" C	1300.00			40	1P	25				26	1P	30	230.00			#12 ROMEX WIRE	Main Line Disconnect	
electric water tanks	2#8 ROMEX-1#10ROM-3/4" C		1300.00		40	1P	27				28	1P	30		230.00		#12 ROMEX WIRE	Main Line Disconnect	
electric water tanks	2#8 ROMEX-1#10ROM-3/4" C			1300.00	40	1P	29				30	1P	30			230.00	#12 ROMEX WIRE	Main Line Disconnect	
SPARE	#12 ROMEX WIRE				20	1P	31				32	1P	20				#12 ROMEX WIRE	SPARE	
SPARE	#12 ROMEX WIRE				20	1P	33				34	1P	20				#12 ROMEX WIRE	SPARE	
		3740.00	5400.00	3100.00										1810.00	3230.00	2785.00			
		ØA = 5550.00 TOTAL CONNECTED LOAD = 20065.00 I (AMP) = 47.64																	
		ØB = 8630.00 DEMAND FACTOR = 1																	
		ØC = 5885.00 TOTAL CONNECTED LOAD +25% SPARE= 25081.25																	

PANEL BOARD SCHEDULE

PANEL TAG:	EP-03	MAINS:	100A T7160AF, 110/120V, 3P,60HZ	NEUTRAL:	YES
LOCATION:	FLOOR PLAN	MOUNTING:	SURFACE MOUNTED	GROUND:	YES
ENCLOSURE:	IP42	VOLTAGE:	110/120V, 3P, 4W		
FEEDER ENTRANCE:	TOP	ELEVATOR:	208/230V, 3P, 4W		



LOAD SERVED	WIRE & CONDUIT SIZE (INCH)	LOAD (VA)			C B	P O L E	C K T N O.	R	Y	B	P O L E	C B	LOAD (VA)			WIRE & CONDUIT SIZE (INCH)	LOAD SERVED	
		ØA	ØB	ØC									ØA	ØB	ØC			
LIGHTING	#12 ROMEX WIRE	1500.00			20	1P	1				2	1P	20	100.00			#12 ROMEX WIRE	LIGHTING
RECEPTACLE	#12 ROMEX WIRE		800.00		20	1P	3				4	1P	20		200.00		#12 ROMEX WIRE	RECEPTACLE
RECEPTACLE	#12 ROMEX WIRE			200.00	20	1P	5				6	1P	60		2500.00		2#8 ROMEX -1#10ROM-3/4" C	HVAC breakers.
electric w ater tanks	2#8 ROMEX -1#10ROM-3/4" C	1300.00			40	1P	7				8	1P	60	2500.00			2#8 ROMEX -1#10ROM-3/4" C	HVAC breakers.
SPARE	#12 ROMEX WIRE				20	1P	9				10	1P	60		2500.00		2#8 ROMEX -1#10ROM-3/4" C	HVAC breakers.
SPARE	#12 ROMEX WIRE				20	1P	11				12	1P	20				#12 ROMEX WIRE	SPARE
											14	1P	20				#12 ROMEX WIRE	SPARE
		2800.00	800.00	200.00										2600.00	2700.00	2500.00		
		ØA =	5400.00	TOTAL CONNECTED LOAD =										11600.00	I (AMP) = 27.54			
		ØB =	3500.00	DEMAND FACTOR =										1				
		ØC =	2700.00	TOTAL CONNECTED LOAD +25% SPARE=										14500.00				

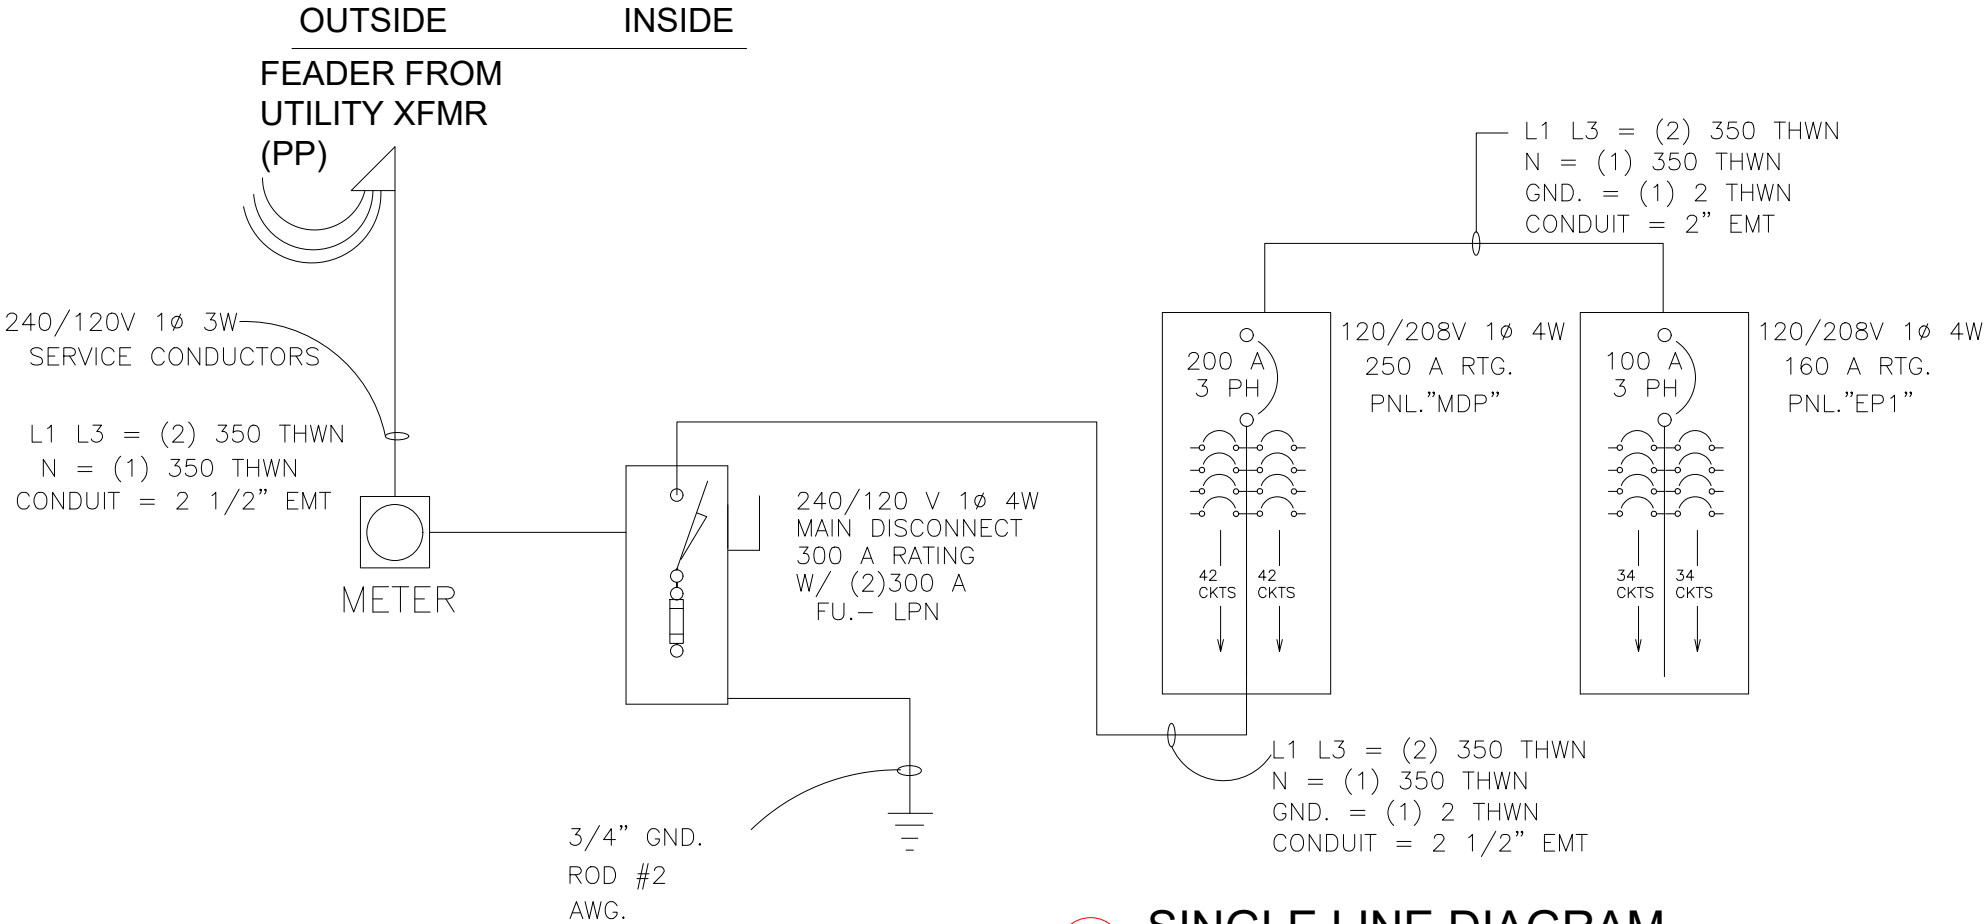

SINGLE LINE DIAGRAM

EL 06 SCALE NTS

OWNER SIGNATURE			
REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			
CLIENT/CONSULTANT APPROVAL STATUS			
APPROVED			(A)
APPROVED WITH NOTES			(B)
RESUBMIT			(C)
DISAPPROVED			(D)
OWNER:			
ADDRESS:			
5207 J STREET SACRAMENTO, CA			
DESIGN CONSULTANT:			
DRAWING STATUS:			
DESIGN DRAWING			
DISCIPLINE:			
ELECTRICAL			
PROJECT TITLE:			
CROWL BUILDING			
DRAWING TITLE:			
PANEL SCHEDULE & SINGLE LINE DIAGRAM			
DRAWN BY:		CHECKED BY:	DATE:
A.S		S.A	02 JUL. 2023
JOB NO		SHT NO	SCALE:
632		EL-06	NTS @A3

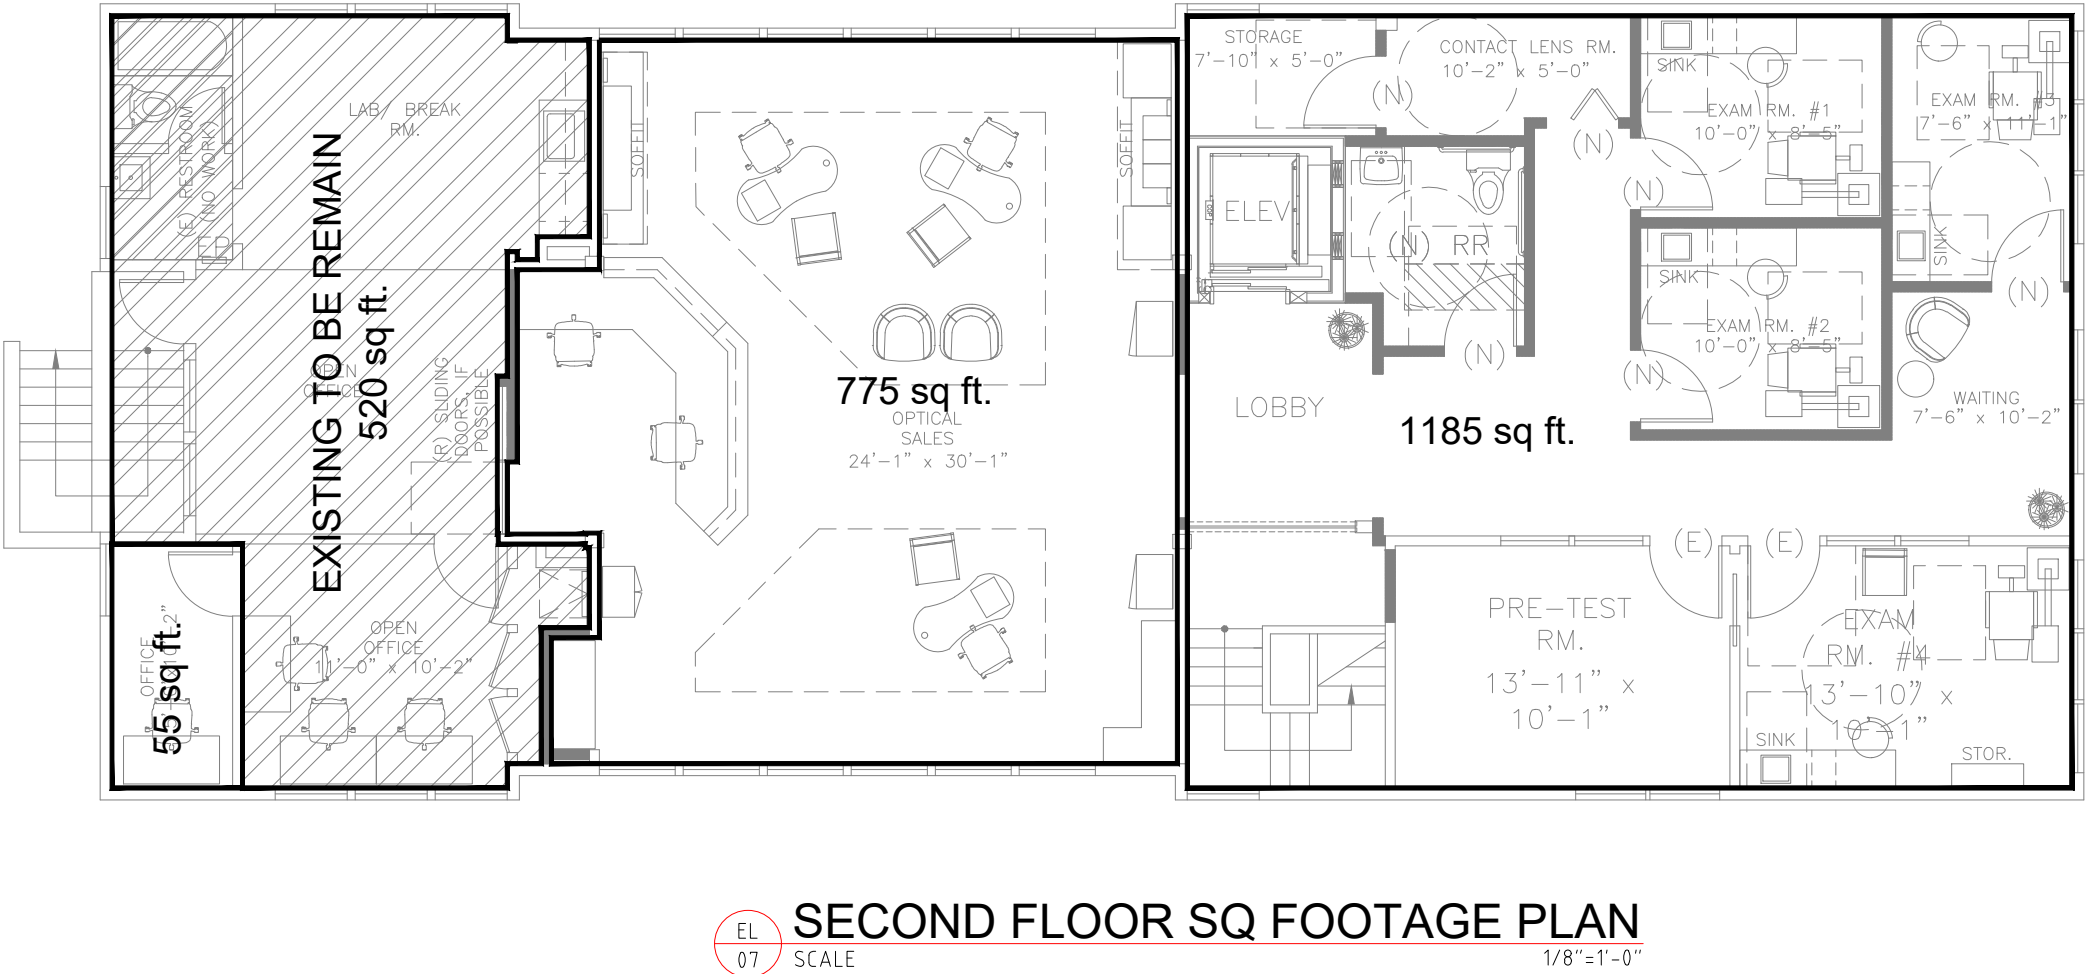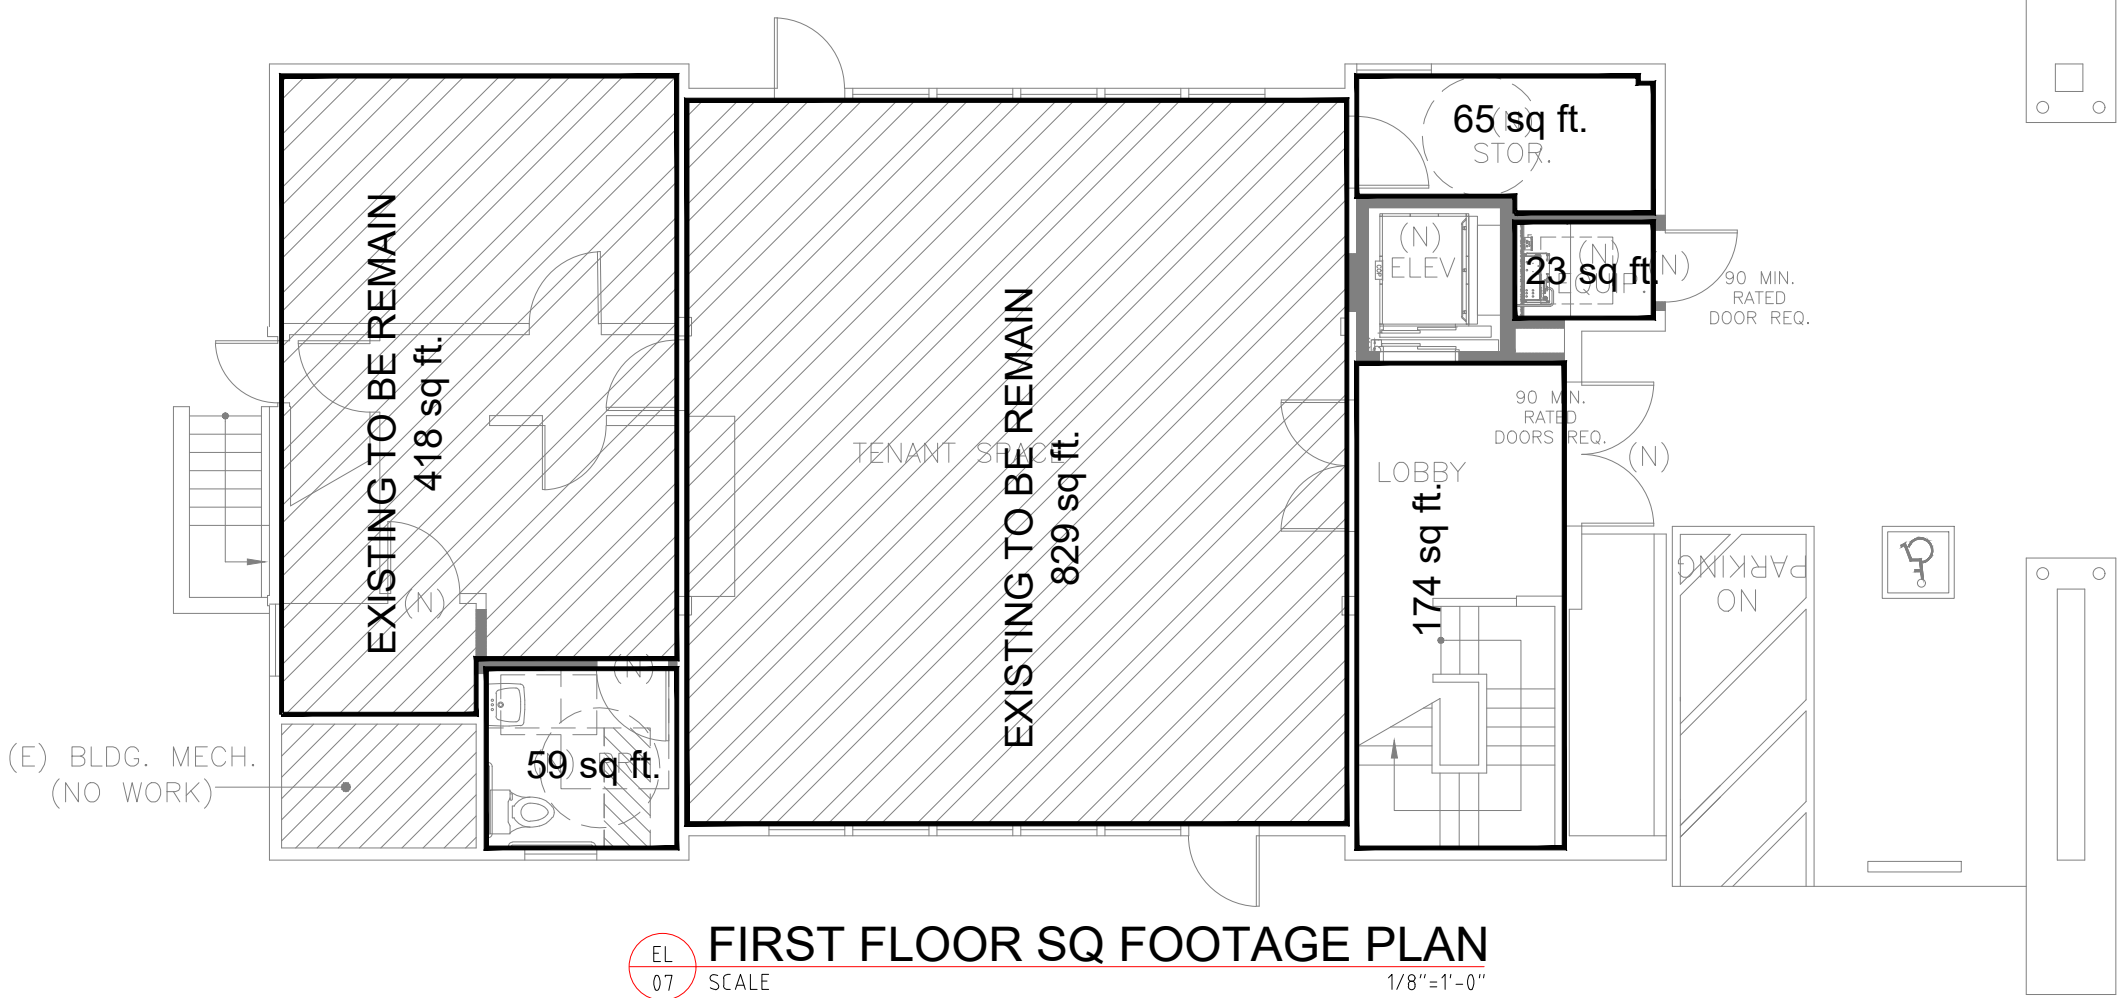

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S.
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
ELECTRICAL

PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
FIRST & SECOND FLOOR
SQ FOOTAGE PLANS

DRAWN BY: A.S.	CHECKED BY: S.A.	DATE: 02 JUL 2023
JOB NO 632	SHT NO EL-07	SCALE: 1/8"=1'-0" @A3

GENERAL PLUMBING NOTES:

1. LOCATION AND SIZES OF ALL EXISTING SERVICES ARE APPROXIMATE. VERIFY ALL UTILITIES PRIOR TO COMMENCING WORK.
2. FOR EXACT LOCATION OF PLUMBING FIXTURES, DRAINS AND EQUIPMENT SEE ARCHITECTURAL DRAWINGS.
3. ALL DOMESTIC WATER AND VENT PIPING SHOWN TO BE RUN ABOVE CEILING UNLESS OTHERWISE NOTED.
4. ALL SANITARY PIPING SHOWN TO BE RUN BELOW FLOOR UNLESS OTHERWISE NOTED.
5. ENTIRE INSTALLATION INCLUDING MATERIALS, EQUIPMENT AND WORKMANSHIP SHALL CONFIRM WITH ALL APPLICABLE LAWS, CODES AND REGULATIONS OF MUNICIPAL, STATE AND FEDERAL AUTHORITIES, ALSO THE PLUMBING CODE 2004, INTERNATIONAL BUILDING CODE 2009, AND OTHER REGULATORY BODIES HAVING JURISDICTION OVER THE CLASS OF WORK.
6. THE CONTRACTOR SHALL MAKE TESTS FOR ACCEPTANCE AND APPROVAL AS REQUIRED BY THE CODE. REQUIRED TESTS SHALL BE PERFORMED IN THE PRESENCE OF OWNER’S REPRESENTATIVE UNLESS WAIVED IN WRITING.
7. THE CONTRACTOR SHALL FIELD COORDINATE THE WORK WITH THAT OF ALL OTHER TRADES.
8. ALL DOMESTIC WATER PIPING SHALL BE INSULATED AS REQUIRED.
9. DOMESTIC WATER PIPING MATERIAL: ASTM B88 TYPE L OR M COPPER TUBE WITH WROUGHT OR CAST COPPER FITTINGS AND LEAD–FREE SOLDERED JOINTS. INSTALL DOMESTIC WATER PIPING LEVEL WITHOUT PITCH AND PLUMB.
- DRAIN, WASTE, STORM, AND VENT PIPING MATERIAL: FOR BELOW GROUND SOIL, WASTE AND BENT PIPING SHOULD BE SERVICE WEIGHT HUB AND SPIGOT CAST IRON CONFORMING TO ASTM A74, WITH LEAD AND OAKUM JOINTS AS ALLOWED BY PLUMBING CODE; FOR ABOVE GROUND SOIL, WASTE AND VENT PIPING SHOULD BE HUBLESS CAST–IRON.
10. ANY ITEM OF MATERIALS NOT INDICATED ON THE DRAWINGS OR NOT SPECIFIED AND WHICH ARE REQUIRED FOR THE COMPLETE INSTALLATION OF ANY PART OF THE WORK DESCRIBED, SHALL BE FURNISHED AS CODE REQUIRED.
11. INSTALL CLEANOUT AT OR NEAR THE BOTTOM OF SANITARY/WASTE STACK.
12. PROVIDE PROPER ACCESS PANELS AS SPECIFIED IN WALLS AND CEILINGS FOR ANY EQUIPMENT, DEVICES, VALVES, SHOCK ABSORBERS, TRAP PRIMERS, CLEANOUTS ETC. REQUIRING ACCESS.

PLUMBING FIXTURE AND FAUCETS REFERENCED STANDARDS		
MARK	DESCRIPTION	STANDARD
WC–1	WATER CLOSET	WATER CLOSETS SHALL CONFIRM TO THE WATER CONSUMPTION REQUIREMENTS OF SECTION 604.4 AND SHALL CONFIRM TO ANSI Z124.4. ASME A112.19.2M, CSA B45.1, CSA B45.4 OR CSA B45.5. WATER CLOSETS SHALL CONFIRM TO THE HYDRAULIC PERFORMANCE REQUIREMENTS OF ASME A112.19.19.9M, CSA B45.1, CSA B45.4 OR CSA B45.5. ELECTRO HYDRAULIC WATER CLOSETS SHALL COMPLY WITH ASME A112.19.13.
L–1	LAVATORY	LAVATORIES SHALL CONFIRM TO ANSI Z124.3. ASME A112.19.1M, ASME A112.19.2M, ASME A112.19.3M, ASME A112.19.4M, ASME A112.19.9M, CSA B45.2, CSA B45.3, CSA B45.4, ROUP WASH UP EQUIPMENT SHALL CONFIRM TO THE REQUIREMENTS OF SECTION 402. EVERY 20 INCHES (608MM) OF RIM SPACE SHALL BE CONSIDERED AS ONE LAVATORY.
KS–1	KITCHEN SINK	SINKS SHALL CONFIRM TO ANSI Z124.6, ASME A112.19.1M, ASME A112.19.2M, ASME A112.19.3M, ASME A112.19.4M, ASME A112.19.9M, CSA B45.1, CSA B45.2, CSA B45.3, OR CSA B45.4,
	FAUCETS AND FIXTURE FITTINGS	FAUCETS AND FIXTURE FITTINGS SHALL CONFORM TO ASME A112.18.1 OR CSA B125. FAUCETS AND FIXTURE FITTINGS THAT SUPPLY DRINKING WATER FOR HUMAN INGESTION SHALL CONFORM TO THE REQUIREMENTS OF NSF 61, SECTION 9. FLEXIBLE WATER CONNECTORS EXPOSED TO CONTINUOUS PRESSURE SHALL CONFORM TO THE REQUIREMENTS OF SECTION 605.6 HAND HELD SHOWERS SHALL CONFORM TO ASSE 1014 OR CSA B125. SHOWER AND TUB SHOWER COMBINATION VALVES SHALL BE BALANCED PRESSURE, THERMOSTATIC OR COMBINATION BALANCED PRESSURE/THERMOSTATIC VALVES THAT CONFORM TO THE REQUIREMENTS OF ASSE 1016 OR CSA B125, MULTIPLE (GANG) SHOWERS SUPPLIED WITH A SINGLE TEMPERED WATER SUPPLY PIPE SHALL HAVE THE WATER SUPPLY FOR SUCH SHOWERS CONTROLLED BY A MASTER THERMOSTATIC MIXING VALVE COMPLYING WITH ASSE 1017. SHOWER AND TUB SHOWER COMBINATION VALVES AND MASTER THERMOSTATIC MIXING VALVES REQUIRED BY THIS SECTION SHALL BE EQUIPPED WITH A MEANS TO LIMIT THE MAXIMUM SETTING OF THE VALVE TO 120°F (49°C), WHICH SHALL BE FIELD ADJUSTED IN ACCORDANCE WITH THE MANUFACTURER’S INSTRUCTIONS. FAUCETS AND FIXTURE FITTINGS WITH HOSE CONNECTED OUTLETS SHALL CONFORM TO ASME A112.18.3M. TEMPERATURE ACTUATED, FLOW REDUCTION DEVICES, WHERE INSTALLED FOR INDIVIDUAL FIXTURE FITTINGS, SHALL CONFORM TO ASSE 1062. SUCH VALVES SHALL NOT BE USED ALONE AS A SUBSTITUTE FOR THE BALANCED PRESSURE. THERMOSTATIC OR COMBINATION SHOWER VALVES REQUIRED IN SECTION 424.3

PLUMBING NOTES:

1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.
2. ALL PLUMBING INSTALLATIONS SHALL CONFIRM WITH THE REQUIREMENTS OF MANUFACTURER RECOMMENDATION AND OR UNIFORM PLUMBING CODE (UPC).
3. ALL PLUMBING MATERIALS SHALL BE AS SPECIFIED IN THE CONTRACT SPECS AND BOQ.
4. ALL PIPE SIZES SHOWN ARE NOMINAL DIAMETER IN INCHES. UNLESS OTHERWISE MENTIONED.
5. INSTALLER SHOULD NOT SCALE THE DRAWING.
6. ALL PIPE PENETRATIONS IN WALL & SLABS SHALL BE THROUGH PIPE SLEEVES.
7. IF ANY ERROR OR OMISSION IS FOUND IN DRAWING THIS OFFICE MAY BE CONSULTED FOR RECTIFICATION.

TABLE 604.4 MAXIMUM FLOW RATES AND CONSUMPTION FOR PLUMBING FIXTURES AND FIXTURE FITTINGS	
PLUMBING FIXTURE R FIXTURE FITTING	MAXIMUM FLOW RATE OR QUANTITY b
LAVATORY, PRIVATE	1.5 gpm at 60 psi
SINK FAUCET	1.5 gpm at 60 psi
WATER CLOSET	1.28 GALLONS PER FLUSHING CYCLE

- FOR SI:

1 GALLON = 3.785 L, 1 GALLON PER MINUTE = 3.785 L/M,
1 POUND PER SQUARE INCH = 6.895 KPA.

A. A HAND HELD SHOWER SPRAY IS A SHOWER HEAD.
B. CONSUMPTION TOLERANCES SHALL BE DETERMINED FROM REFERENCED STANDARDS.
C. WATER FACTOR IN GALLONS PER CYCLE CUBIC FOOT

ALL PLUMBING FIXTURES SHALL CONTRIBUTE TO A LEEDS SOLUTION AND SHALL MEET EPA CRITERIA AND BEEN CONSIDERED AS WATER EFFICIENT PRODUCTS AS STIPULATED BY THE LEEDS TA 2009 REFERENCE GUIDE (20% REDUCTION REQUIRED).

2010 F.B.C PLUMBING AS PER SECTION 604.9
A WATER HAMMER ARRESTOR SHALL BE INSTALLED WHERE QUICK CLOSING VALVES ARE UTILIZED.
WATER HAMMER ARRESTORS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER’S SPECIFICATIONS. WATER HAMMER ARRESTORS SHALL CONFORM TO ASSE 1010.

OWNER SIGNATURE

REVISION STATUS

Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS

APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

PLUMBING


PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:

NOTES

DRAWN BY:	CHECKED BY:	DATE:
A.S	S.A	02 JUL 2023
JOB NO	SHT NO	SCALE:
632	PL-01	NTS @A3

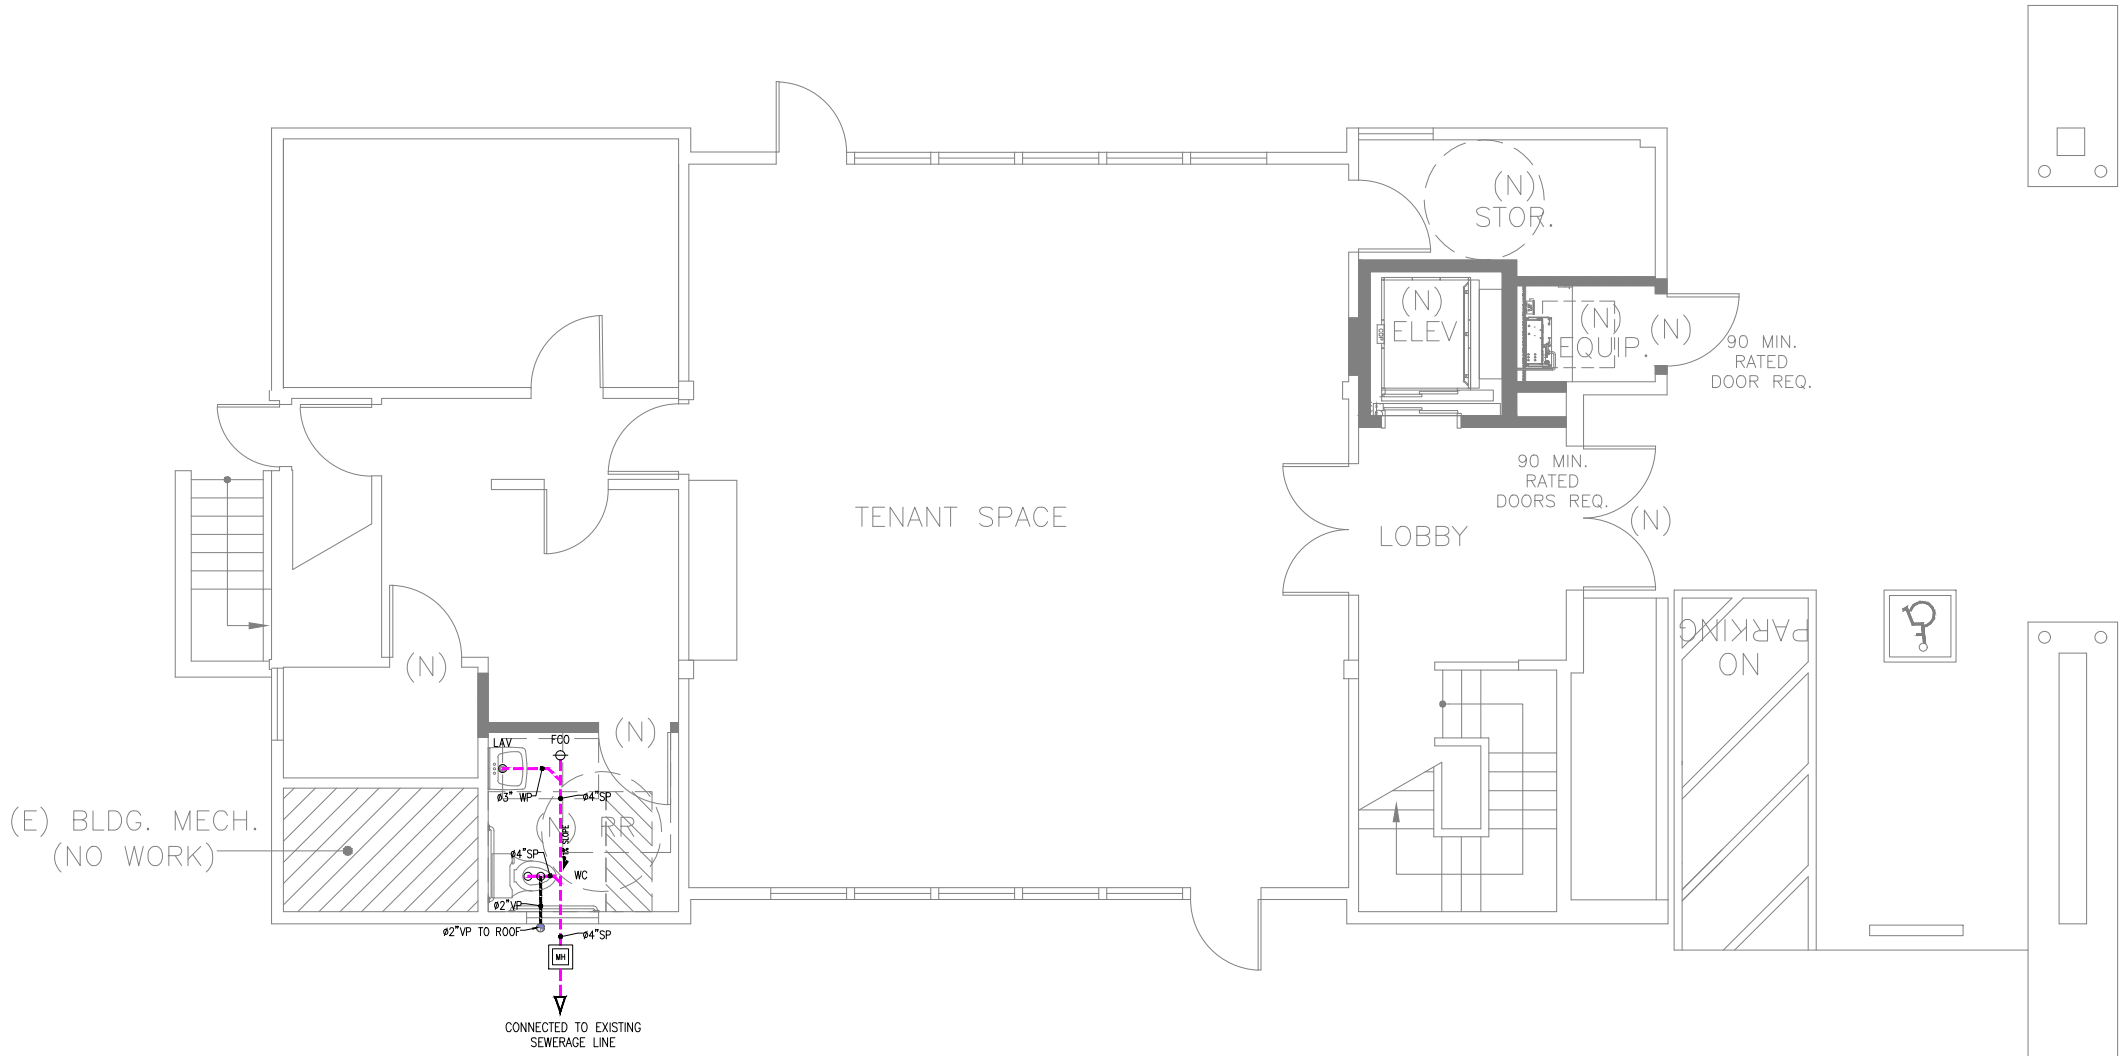

PL 02 FIRST FLOOR DRAINAGE PLAN
SCALE 1/8"=1'-0"

PLUMBING LEGEND:	
SYMBOL	DESCRIPTION
	HWS — HOT WATER SUPPLY
	CWS — COLD WATER SUPPLY
	VP—VENT PIPE
	SP—SOIL PIPE
	WP—WASTE PIPE
	SHUT OFF VALVE
	GATE VALVE
WH	WATER HEATER
WC	WATER CLOSET
AS	ABLUTION SPRAY
LAV	LAVATORY

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

PLUMBING


PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:

FIRST FLOOR DRAINAGE PLAN

DRAWN BY: A.S	CHECKED BY: S.A	DATE: 02 JUL 2023
JOB NO 632	SHT NO PL-02	SCALE: 1/8"=1'-0" @A3

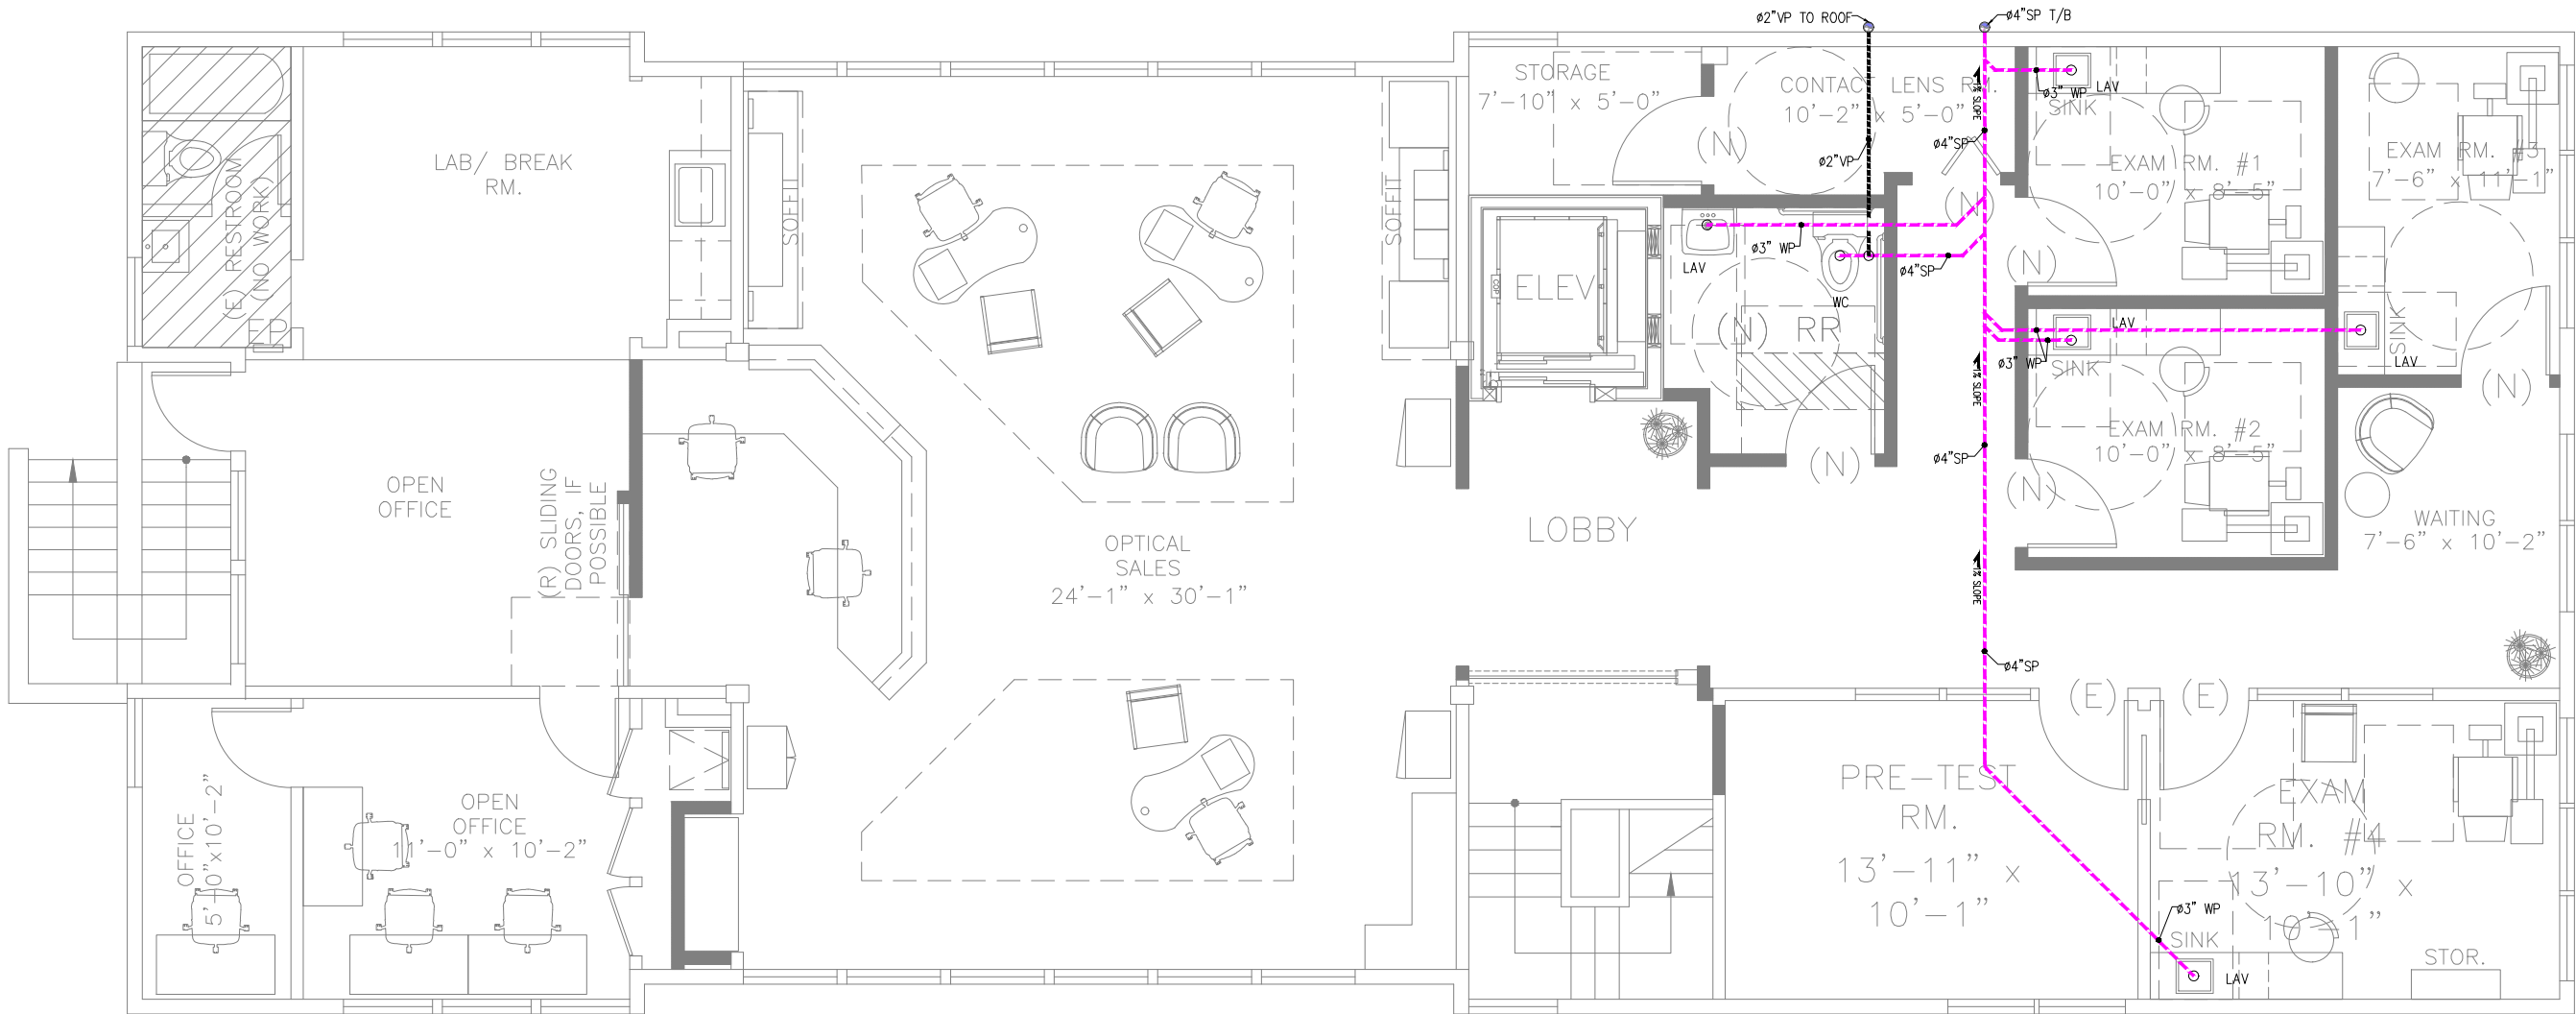

PL
03

SECOND FLOOR DRAINAGE PLAN

SCALE 3/16"=1'-0"

PLUMBING LEGEND:	
SYMBOL	DESCRIPTION
---	HWS — HOT WATER SUPPLY
---	CWS — COLD WATER SUPPLY
---	VP—VENT PIPE
---	SP—SOIL PIPE
---	WP—WASTE PIPE
— —	SHUT OFF VALVE
— — —	GATE VALVE
WH	WATER HEATER
WC	WATER CLOSET
AS	ABLUTION SPRAY
LAV	LAVATORY

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:
5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:


DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
PLUMBING

PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
SECOND FLOOR DRAINAGE PLAN

DRAWN BY: A.S	CHECKED BY: S.A	DATE: 02 JUL 2023
JOB NO 632	SHT NO PL-03	SCALE: 3/16"=1'-0" @A3

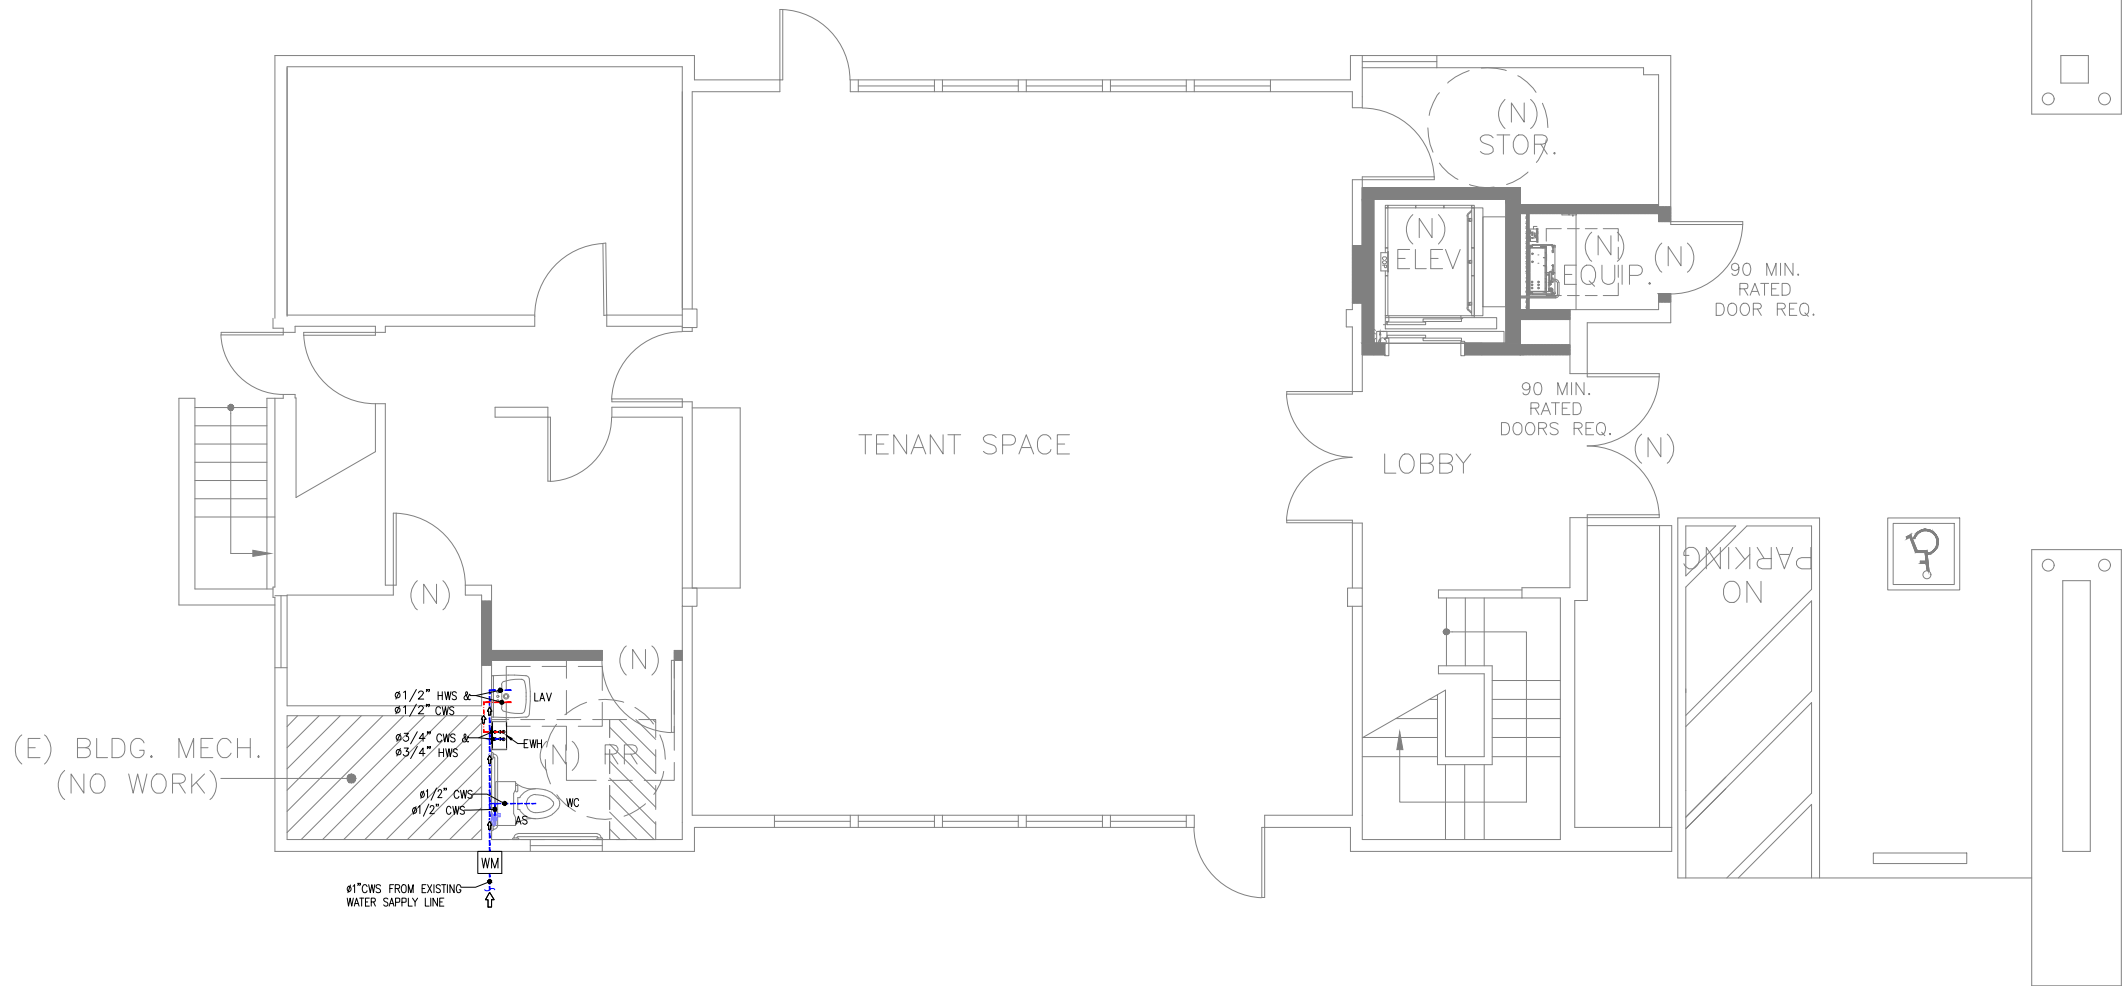

PL
04

FIRST FLOOR WATER SUPPLY PLAN

SCALE

1/8"=1'-0"

PLUMBING LEGEND:	
SYMBOL	DESCRIPTION
	HWS — HOT WATER SUPPLY
	CWS — COLD WATER SUPPLY
	VP—VENT PIPE
	SP—SOIL PIPE
	WP—WASTE PIPE
	SHUT OFF VALVE
	GATE VALVE
WH	WATER HEATER
WC	WATER CLOSET
AS	ABLUTION SPRAY
LAV	LAVATORY

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

PLUMBING


PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:

FIRST FLOOR
WATER SUPPLY PLAN

DRAWN BY:	CHECKED BY:	DATE:
A.S	S.A	02 JUL 2023
JOB NO	SHT NO	SCALE:
632	PL-04	1/8"=1'-0" @A3

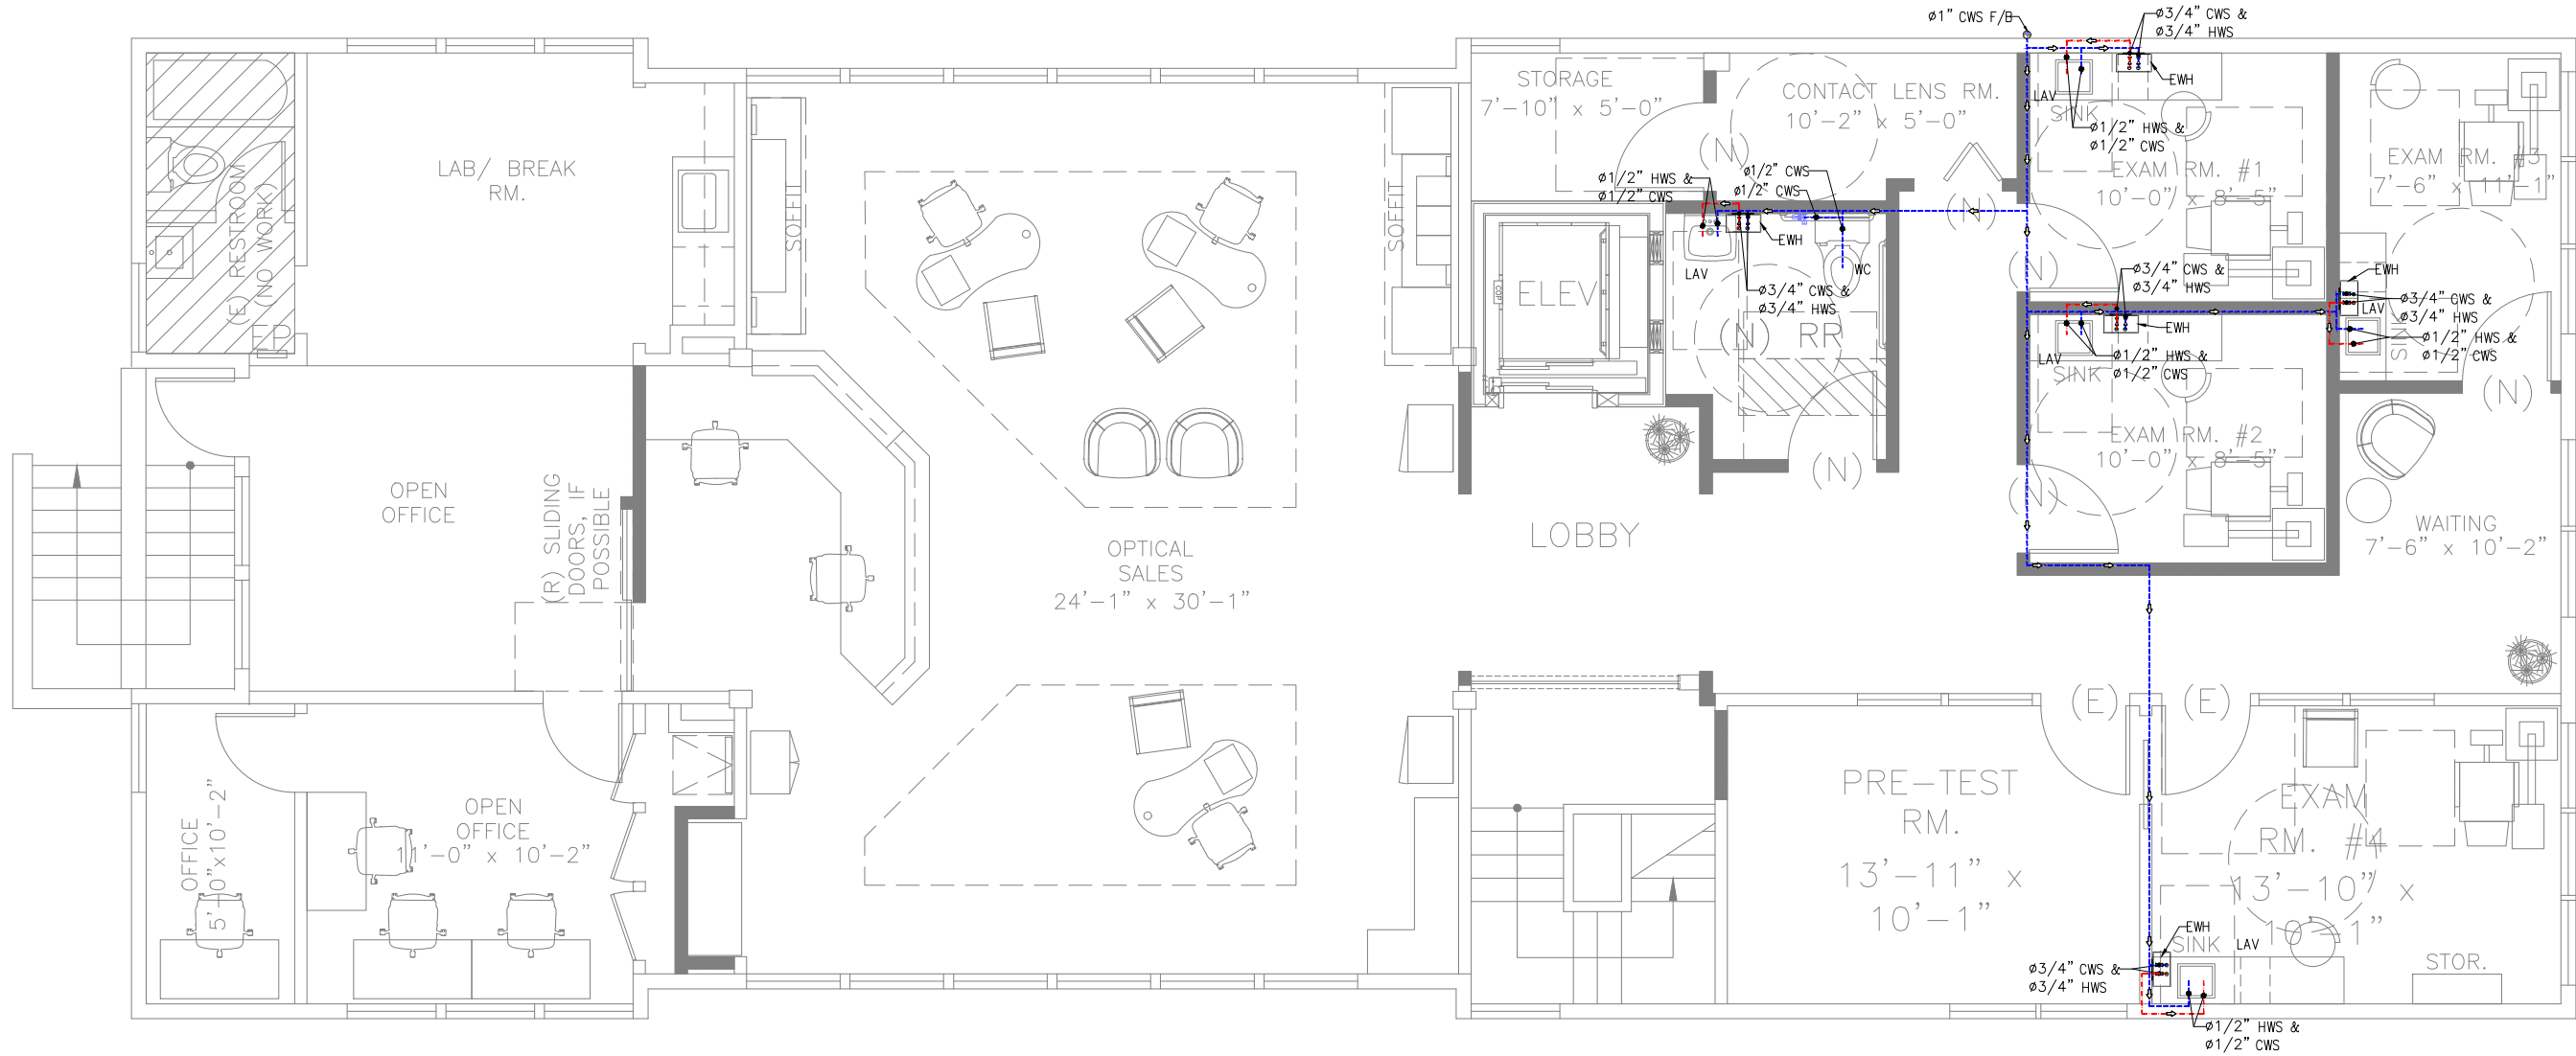

PL
05

SCALE

SECOND FLOOR WATER SUPPLY PLAN

3/16"=1'-0"

PLUMBING LEGEND:	
SYMBOL	DESCRIPTION
	HWS — HOT WATER SUPPLY
	CWS — COLD WATER SUPPLY
	VP—VENT PIPE
	SP—SOIL PIPE
	WP—WASTE PIPE
	SHUT OFF VALVE
	GATE VALVE
WH	WATER HEATER
WC	WATER CLOSET
AS	ABLUTION SPRAY
LAV	LAVATORY

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:



DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
PLUMBING

PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
SECOND FLOOR
WATER SUPPLY PLAN

DRAWN BY: A.S	CHECKED BY: S.A	DATE: 02 JUL 2023
JOB NO 632	SHT NO PL-05	SCALE: 3/16"=1'-0" @A3

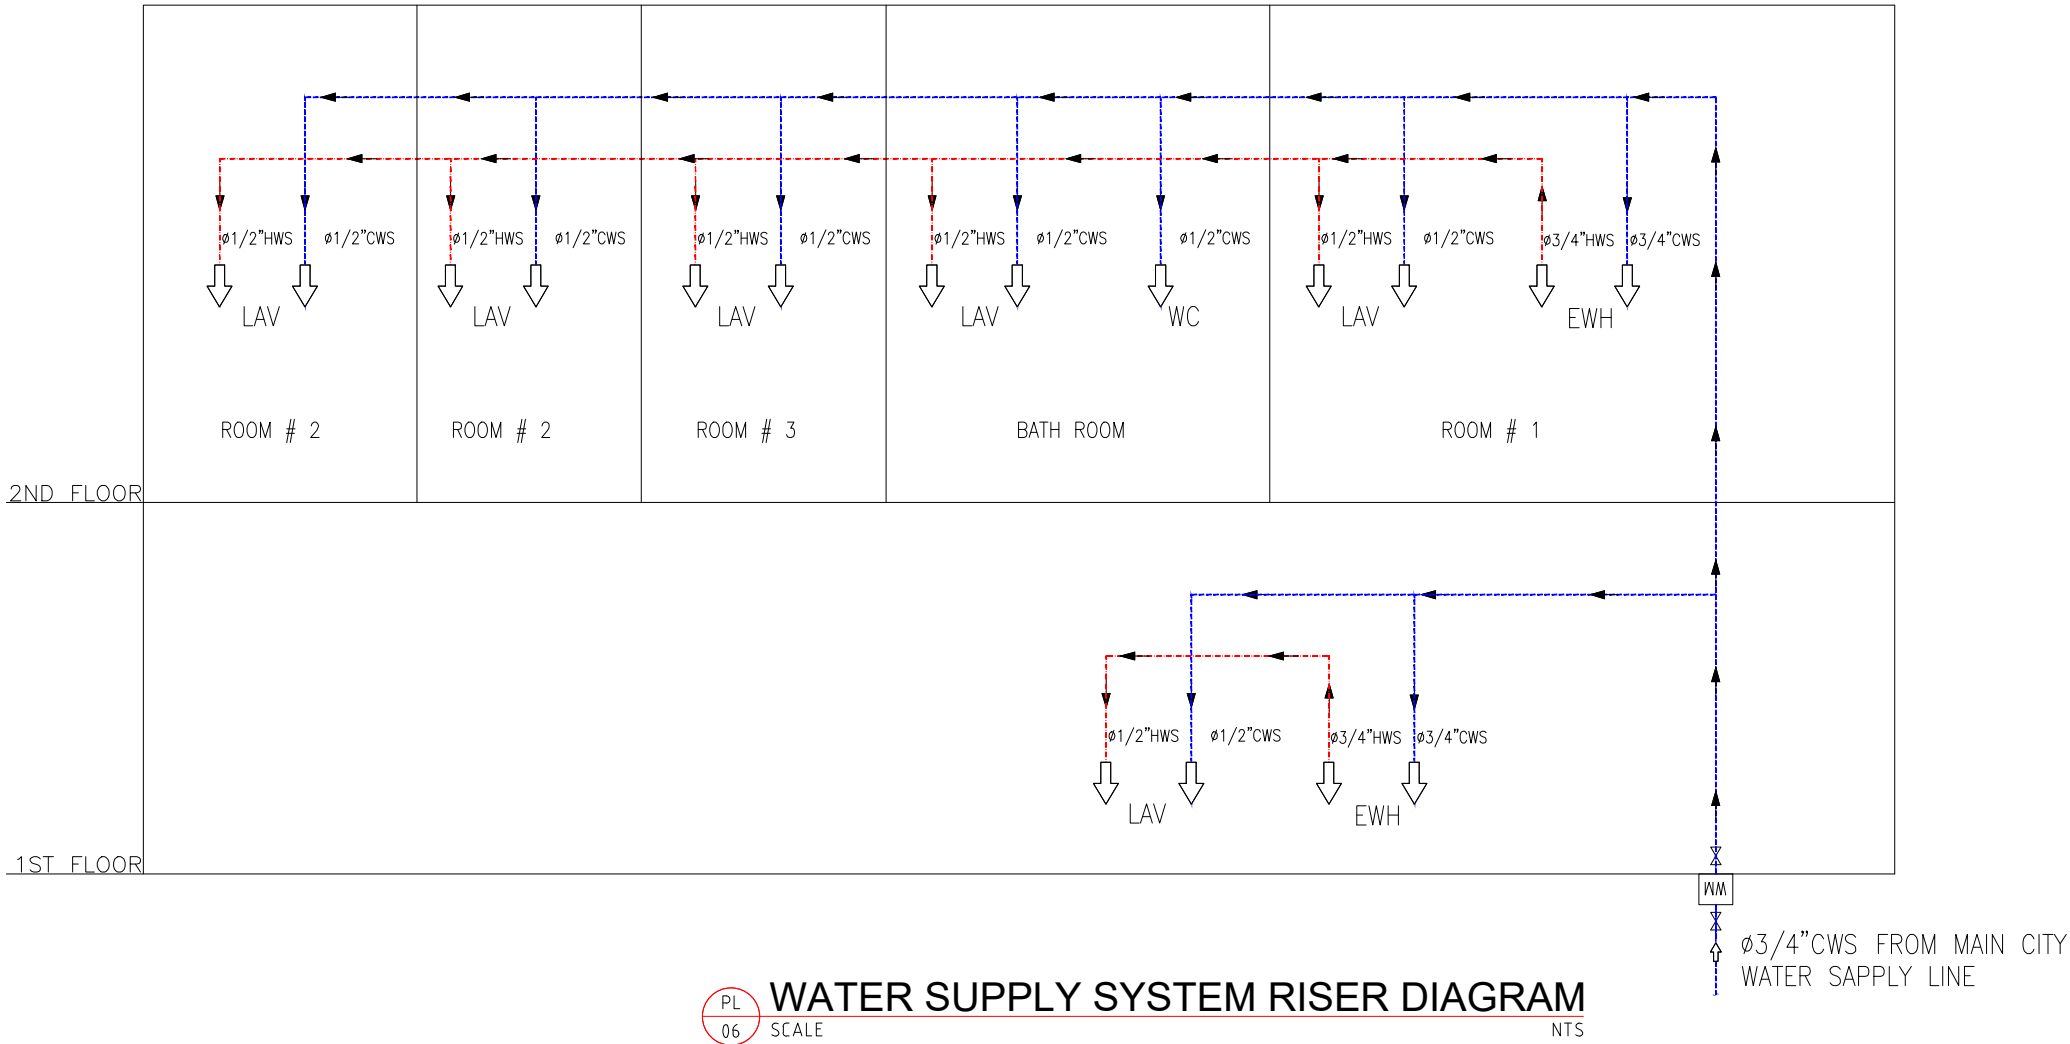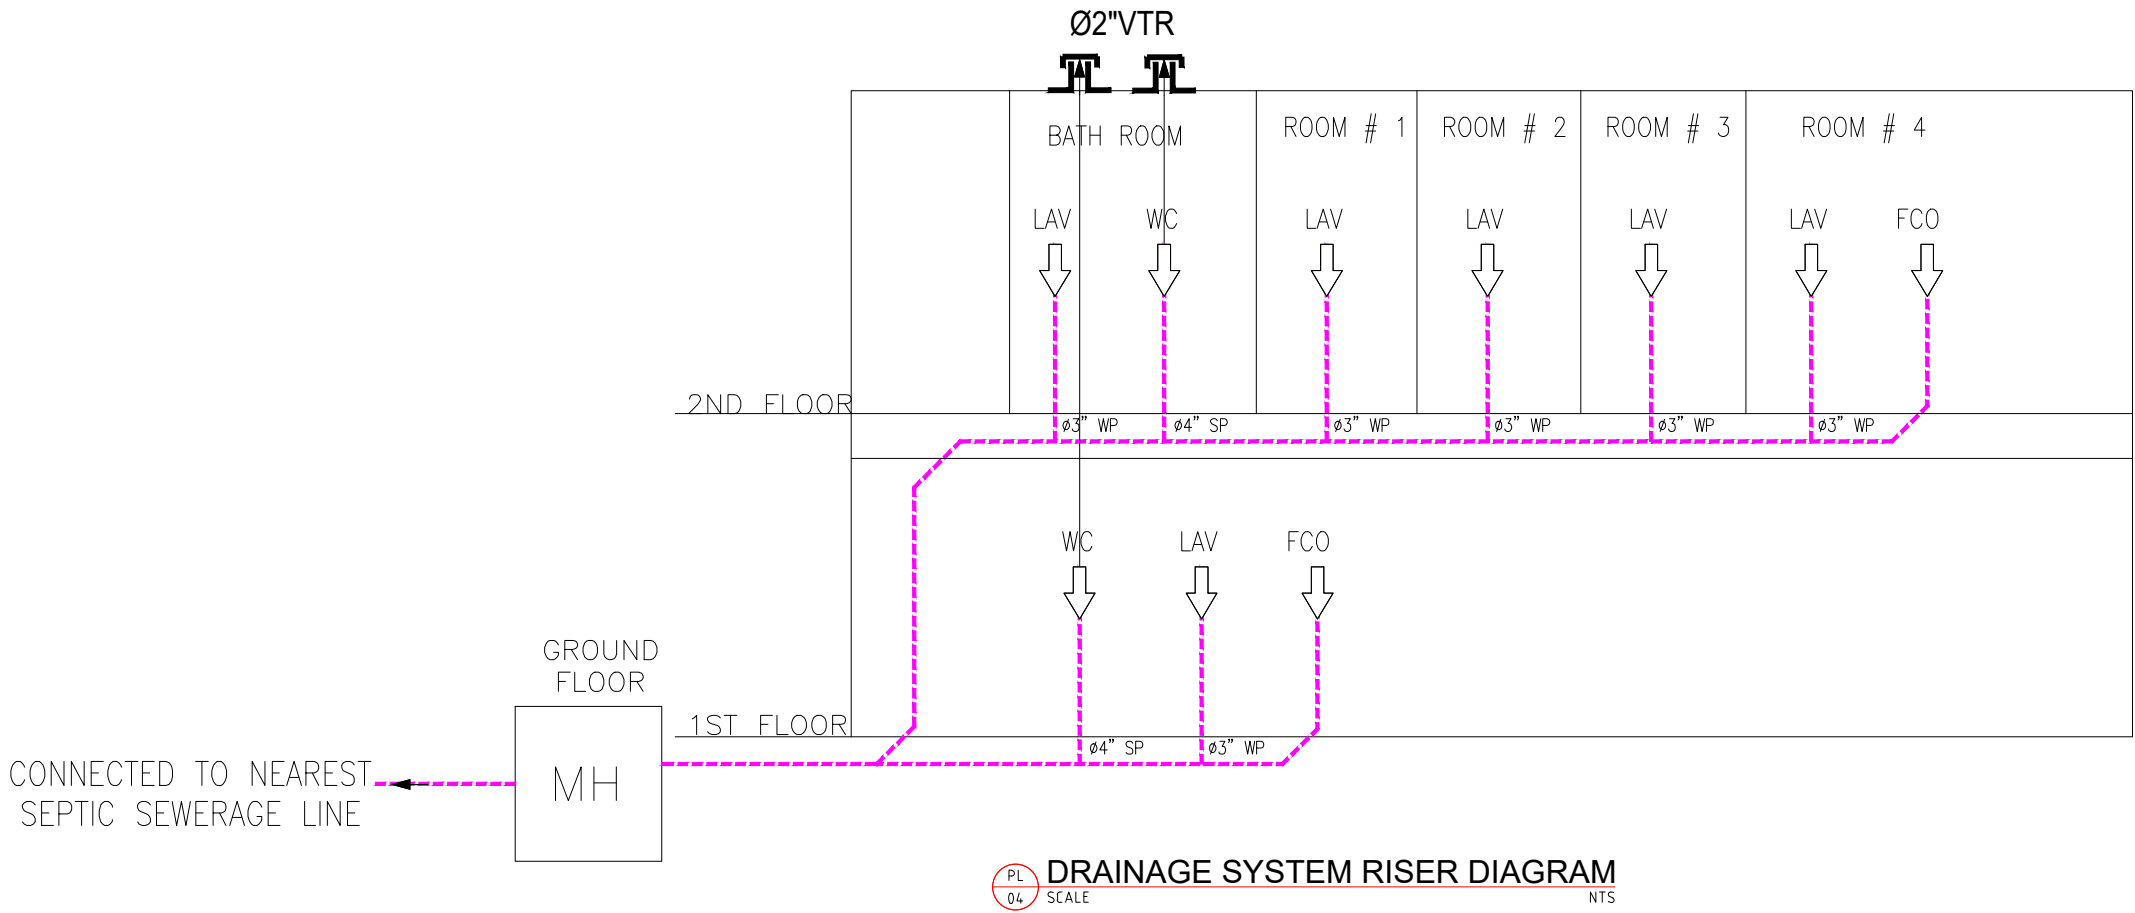

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

PLUMBING

PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:

RISER DIAGRAM

DRAWN BY:	CHECKED BY:	DATE:
A.S	S.A	02 JUL 2023
JOB NO:	SHT NO:	SCALE:
632	PL-06	NTS @A3

ROD HANGER AND VERTICAL ANGLE

LONGITUDINAL BRACE

THREADED STUD BOLT

WASHER TO COVER WELD

"ELCEN" WELDED BEAM ATTACHMENT OR EQUAL

TYP.

3/16

1/4" MIN.

"ELCEN" PIPE CLAMP—HEAVY TYPE OR EQUAL

CONNECTION TO STRUCTURAL SUPPORTING MEMBER

D 01 TYPICAL LONGITUDINAL PIPE BRACING SCALE NTS

1. THIS BRACING DETAIL APPLIES ONLY FOR COLD WATER PIPE AND GAS PIPE WHERE MOVEMENT OF THE PIPE DUE TO TEMPERATURE DIFFERENTIAL IS NEGLIGIBLE

2. IT IS THE RESPONSIBILITY OF THE USER OF THIS GUIDELINE TO ASCERTAIN THAT AN ADEQUATE BRACING AND ANCHORAGE DEVICE BE DESIGNED FOR PIPE WHENEVER THE MOVEMENT DUE TO THERMAL DIFFERENTIAL EXISTS. PROVIDE ONE ANCHOR POINT IN ONE PIPE RUN. ALLOW FOR LONGITUDINAL PIPE MOVEMENT AT THE OPPOSITE END OF THE ANCHOR POINT.

sprinkler (strainer) delivered with tap

flexible hoses 1/2" with rubber gaskets

double threaded pipe 1/2" (nipple)

T-pipe with internal thread 1/2"

double threaded pipe 1/2"

elbow 1/2"

suppressing - shutting off valve

Heater connection to tap assembly with hoses 1/2"

D 02 WATER HEATER INSTALLATION DETAILS SCALE NTS

TERMINATE SLEEVE FLUSH WITH FINISHED WALL SURFACE

PIPE AND INSULATION (IF APPLICABLE) CENTERED IN SLEEVE

FIRESTOP SLEEVE AT FIRE-RATED WALLS

CONCEALED PIPING — PIPING EXPOSED TO VIEW

INTERIOR WALLS

PIPE SLEEVE OF SIZE TO PASS PIPE AND INSULATION (IF APPLICABLE) WITH MIN 1/2" ANNULAR SPACE

FINISHED ESCUTCHEON PLATE FLUSH AGAINST WALL AND OF SIZE TO COMPLETELY COVER OPENING

SEALING AND ANCHORING COLLAR FOR CONCRETE WALLS

SEAL ENDS OF SLEEVE WITH EXPANDING FOAM WEATHER-TIGHT SEALANT

GALV STEEL PIPE SLEEVE OF SIZE TO PASS PIPE AND INSULATION WITH MIN 1/2" ANNULAR SPACE

PIPE AND INSULATION (IF APPLICABLE) CENTERED IN SLEEVE

COAT EXTERIOR SURFACES OF SLEEVE WITH COAL TAR

OUTDOOR — INDOOR

EXTERIOR CONCRETE WALLS

D 03 PIPE SLEEVES THROUGH WALLS SCALE NTS

METAL CAP WITH RIDGE Baffle

SHINGLES

UNDER LAYMENT

ROOF FLASHING

ADJUSTABLE ROOF FLASHING

TOLERANCE

ONE PIECE SLEEVE FLASHING LAB 8" ROOF VENT

SHINGLES

ROOF PENETRATION FLASHING

VENT PIPE DRAINAGE UNITS

6" ±

CLEARANCE TO MIN 6" WALL SIZE

D 04 THRU ROOF VENT DETAIL SCALE NTS

THROUGH-SLAB PENETRATION

SLEEVE OR WRAP PIPING TO PROTECT AGAINST BREAKAGE PER CODE

CONCRETE FLOOR OR WALL

D 05 PIPE SLAB PENETRATION SCALE NTS

SHUT-OFF VALVE

PDI UNIT "A"

1/2" HOT WATER FROM SINK

AIR GAP FITTING OR LOOPEO HIGH & SECURELY FASTENED TO COUNTER OR WALL

SINK

GARBAGE DISPOSER (WHERE INDICATED)

1-1/2", CONNECT TO SANITARY SYSTEM

UNION (TYP)

DISHWASHER

D 06 RESIDENTIAL DISHWASHER PIPING DETAIL SCALE NTS

"CLEANOUT" TO BE CAST IN COVER

6" THICK BY 18" SQUARE CONCRETE PAD

CAST IRON CLEANOUT WITH COVER FOR APPLICABLE DUTY

GRADE OR PAVING

FINISHED FLOOR

CAST IRON LONG SWEEP 1/4 BEND OR CAST IRON COMB. Y & 1/8 BEND. (USE REDUCING TYPE FOR SIZE CHANGES)

CAST IRON EXTENSION—SAME AS DRAIN SIZE UP TO 4" DIAMETER

CHROME WALL COVER AND SCREW AT FINISH AREAS ONLY

PLUGGED TEE WITH CLEANOUT FLOOR

MAY EXTEND AS WASTE OR VENT

WALL

BUILDING WASTE OR DRAIN

DIRECTION OF FLOW

D 07 EXTERIOR CLEANOUT TO GRADE (COTG) SCALE NTS

D 08 INTERIOR FLOOR CLEANOUT (FCO) SCALE NTS

D 09 INTERIOR WALL CLEANOUT (WCO) SCALE NTS

D 10 CLEANOUT DETAILS SCALE NTS

REFRIGERATOR

COUNTERTOP

BACKFLOW PREVENTER, WATS SERIES 7 IN CABINET

SHUT-OFF VALVE

1/2" COLD WATER FROM SINK OR AS INDICATED ON PLANS

1/4 TURN VALVE W/ HAMMER ARRESTOR

THRU WALL

RECESSED MOUNTED VALVE BOX

FLOOR

D 11 REFRIGERATOR WATER CONNECTION DETAIL SCALE NTS

HOSE BIBB SUPPLY FITTINGS. INSTALL SHOCK ABSORBER AND HOSE TEE ADAPTER

HOT

COLD

WASHING MACHINE ROUGH-IN UNIT

2" STAND PIPE

12" x 12" ACCESS PANEL

1-1/2" VENT

3" DRAIN TO SAN. SEWER

2" P-TRAP

CLEANOUT

42" MIN. CORDS W/ ARCHITECT

FINISHED FLOOR

D 12 RESIDENTIAL WASHING MACHINE CONNECTION DETAIL SCALE NTS

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

DRAWING STATUS:
DESIGN DRAWING































DISCIPLINE:
PLUMBING

PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
DETAILS

DRAWN BY: A.S	CHECKED BY: S.A	DATE: 02 JUL 2023
JOB NO 632	SHT NO PL-07	SCALE: NTS @A3

MECHANICAL LEGEND

SYMBOL	ABBREV.	DESCRIPTION	SYMBOL	ABBREV.	DESCRIPTION
		COORDINATE WITH ELECTRICAL			LINED DUCTWORK (OR PLENUM)
	CD	CONDENSATE DRAIN (A.C)			DUCT RISE IN DIRECTION OF FLOW
	D	DRAIN			DUCT DROP IN DIRECTION OF FLOW
	RD	REFRIGERANT DISCHARGE			ROUND DUCT UP
	RL	REFRIGERANT LIQUID			ROUND DUCT DOWN
	RS	REFRIGERANT SUCTION			SUPPLY DUCT UP
		PIPE DOWN			SUPPLY DUCT DOWN
		PIPE UP		RA/OA	RETURN AIR DUCT/OUTSIDE AIR DUCT UP
		PIPE RISE (OR DN. FOR DROP)			RETURN AIR DUCT/OUTSIDE AIR DUCT DOWN
		DIRECTION OF FLOW IN PIPE			EXHAUST AIR DUCT UP
	AV	AIR VENT (VALVE)			EXHAUST AIR DUCT DOWN
	CHV	CHECK VALVE			DUCT TRANSITION
	CV (2W)	CONTROL VALVE (2-WAY)		CD	CEILING DIFFUSER
	CV (3W)	CONTROL VALVE (3-WAY)		RR	RETURN REGISTER
	FCD	AUTOMATIC FLOW CONTROL DEVICE		ER	EXHAUST REGISTER
	SOV	SHUT OFF VALVE		T'STAT	THERMOSTAT OR TEMPERATURE SENSOR (NUMBER INDICATES EQUIPMENTOR ZONE SERVED)
		GLOBE/BALL/BUTTERFLY VALVE		H'STAT	HUMIDISTAT
	BV	COMBINATION BALANCING & SHUT-OFF VALVE			CARBON DIOXIDE SENSOR
	FEV	FLOW ELEMENT VENTURI		CFM	CUBIC FEET PER MINUTE
		VALVE ON RISE OR DROP			SYMBOL, SEE EQUIPMENT SCHEDULE
	STR.	STRAINER			
	CL	CAPPED LINE			
	DN.	DOWN OR DROP			
	UP	RISE OR RISER			
	RV	PRESSURE RELIEF VALVE			
	PG	PRESSURE GAUGE WITH BALL VALVE			
	R.	ECCEMTRIC REDUCER			
	R.	CONCENTRIC REDUCER			
	FC	FLEXIBLE CONNECTION (PIPE)			
	PA	PIPE ANCHOR			
	U	UNION			
		DUCTWORK (1ST NUMBER INDICATES WIDTH SHOWN), NET INSIDE DIMENSION			
	TV	SQUARE ELBOW WITH TURNING VANES			
		RADIUS ELBOW			
	MVD	MANUAL VOLUME DAMPER			
	MOD	MOTOR OPERATED DAMPER			
	BDD	BACKDRAFT DAMPER			
	FD	FIRE DAMPER			
	SD	DUCT MOUNTED SMOKE DETECTOR			
	SFD	AUTOMATIC SMOKE AND FIRE DAMPER			
	FLEX	FLEXIBLE CONNECTION (DUCTWORK)			
	FLEX	FLEXIBLE CONNECTION OR SEISMIC JOINT			

HVAC ABBREVIATIONS

A	AMPERES	HZ	FREQUENCY
AC	AIR CONDITIONING	IN	INCH OR INCHES
AD	ACCESS DOOR	KW	KILOWATT
AFF	ABOVE FINISHED FLOOR	LG	LENGTH
AL	ACOUSTICAL LINING	LAT	LEAVING AIR TEMPERATURE
BHP	BRAKE HORSEPOWER	LBS	POUNDS
BTU	BRITISH THERMAL UNIT	LDB	LEAVING DRY BULB TEMPERATURE
BTUH	BTU PER HOUR	LIN FT	LINEAR FEET
CD	CEILING DIFFUSER	LWB	LEAVING WET BULB TEMPERATURE
CFM	CUBIC FEET PER MINUTE	MAX	MAXIMUM
CG	CEILING GRILLE	MBH	THOUSAND BTU PER HOUR
CLG	CEILING	MHP	MOTOR HORSEPOWER
COMPR	COMPRESSOR	MIN	MINIMUM
CR	CEILING REGISTER	NIC	NOT IN CONTRACT
DB	DRY BULB	NO.	NUMBER
DIAM	DIAMETER	NTS	NOT TO SCALE
DN	DOWN	RA	RETURN AIR
DWG	DRAWING	RM	ROOM
DX	DIRECT EXPANSION	RPM	REVOLUTIONS PER MINUTE
EAT	ENTERING AIR TEMPERATURE	SP	STATIC PRESSURE
EDB	ENTERING DRY BULB TEMPERATURE	SPEC	SPECIFICATION
EF	EXHAUST FAN	TEMP	TEMPERATURE
EWB	ENTERING WET BULB	TG	TOP GRILLE
EWT	ENTERING WATER TEMPERATURE	TV	TURNING VANES
°F	DEGREES FAHRENHEIT	TYP	TYPICAL
FC	FLEXIBLE CONNECTION	W	WIDTH
FD	FIRE DAMPER	W/	WITH
FIN FL	FINISHED FLOOR	W/O	WITHOUT
FLA	FULL LOAD AMPERES	WB	WET BULB
FPM	FEET PER MINUTE	WMS	WIRE MESH SCREEN
FT	FEET	SG	SUPPLY GRILLE
HD	HEAD	RG	RETURN GRILLE
HR	HOUR	SP	SMOKE PURGE
MAU	MAKE UP AIR UNIT		

OWNER SIGNATURE

REVISION STATUS

Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS

APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

MECHANICAL

PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:

NOTES

DRAWN BY: A.S	CHECKED BY: S.A	DATE: 02 JUL 2023
JOB NO 632	SHT NO ME-01	SCALE: NTS @A3

AUH-1 SCHEDULE													
MARK	QTY	LOCATION	MANUFACTURER AND MODEL	BTU OUTPUT	SUPPLY CFM	ESP (IN. W.G.)	FUEL	Dimensions L x W x H	Gas Connection Size In	ELECTRICAL V/Ft/Hz	MCA	MAX FUSE SIZE	WEIGHT
 4	1	AS SHOWN	AS PER SUPPLIER	48,000	400	0.7	NAT GAS	-	1/2	115/1/60	7.2	15 amp	-
 5	1	AS SHOWN	AS PER SUPPLIER	12,000	200	0.7	NAT GAS	-	1/2	115/1/60	7.2	15 amp	-

OUTDOOR CONDENSING UNIT													
MARK	QTY	LOCATION	MANUFACTURER	TON	COOLING CAPACITY BTU/H	AMBIENT TEMP	FLA	CIRCUIT BREAKER MAX AMPS	LIQUID LINE SUCTION LINE	REF	ELECTRICAL	WEIGHT	DIMENSIONS
 4	1	RD	AS PER SUPPLIER	1.0	48,000	95F	0.5	30	3/8" / 3/8"	R410a	208-1-60	165 LBS	----
 5	1	RD	AS PER SUPPLIER	1.0	12,000	95F	0.5	30	3/8" / 3/8"	R410a	208-1-60	165 LBS	----

EXHAUST FAN SCHEDULE													
MARK	QTY	LOCATION	MANUFACTURER AND MODEL	TYPE	CFM	E.S.P. (IN. W.G.)	MOTOR DATA			SONES	OPTIONS -ACCESSORIES	WEIGHT	
							WATTS	SPEED	ELECTRICAL				
 1	2	GF UTILITY RM	AIR KING AK50 OR EQUAL	CEILING MOUNTED	50	0.25	1500	1	120-1-60	1.5	BACK DRAFT DAMPER CONTROLLED BY SWITCH	10	

NOTES:
VERIFY WITH ARCHITECT/OWNER FOR EXACT MODEL NUMBER BEFORE ROUGH-IN
ALL EXHAUST FANS TO BE ENERGY STAR CERTIFIED

DRAWING LEGEND	
SYMBOL	DESCRIPTION
	OUTDOOR AIR CONDENSING UNIT
	RTU-ROOF TOP UNIT.
	AIR SUPPLY DUCT. SIZE IS SHOWN ON PLAN
	RETURN SUPPLY DUCT. SIZE IS SHOWN ON PLAN
	EXHAUST AIR DUCT. SIZE IS SHOWN ON PLAN
	SUPPLY AIR DIFFUSER ON CEILING
	RETURN AIR DIFFUSER ON CEILING
	EXHAUST FAN
	WALL EXHAUST GRILL

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
MECHANICAL


PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
FIRST FLOOR HVAC PLAN

DRAWN BY: A.S	CHECKED BY: S.A	DATE: 02 JUL 2023
JOB NO 632	SHT NO ME-02	SCALE: 1/8"=1'-0" @A3



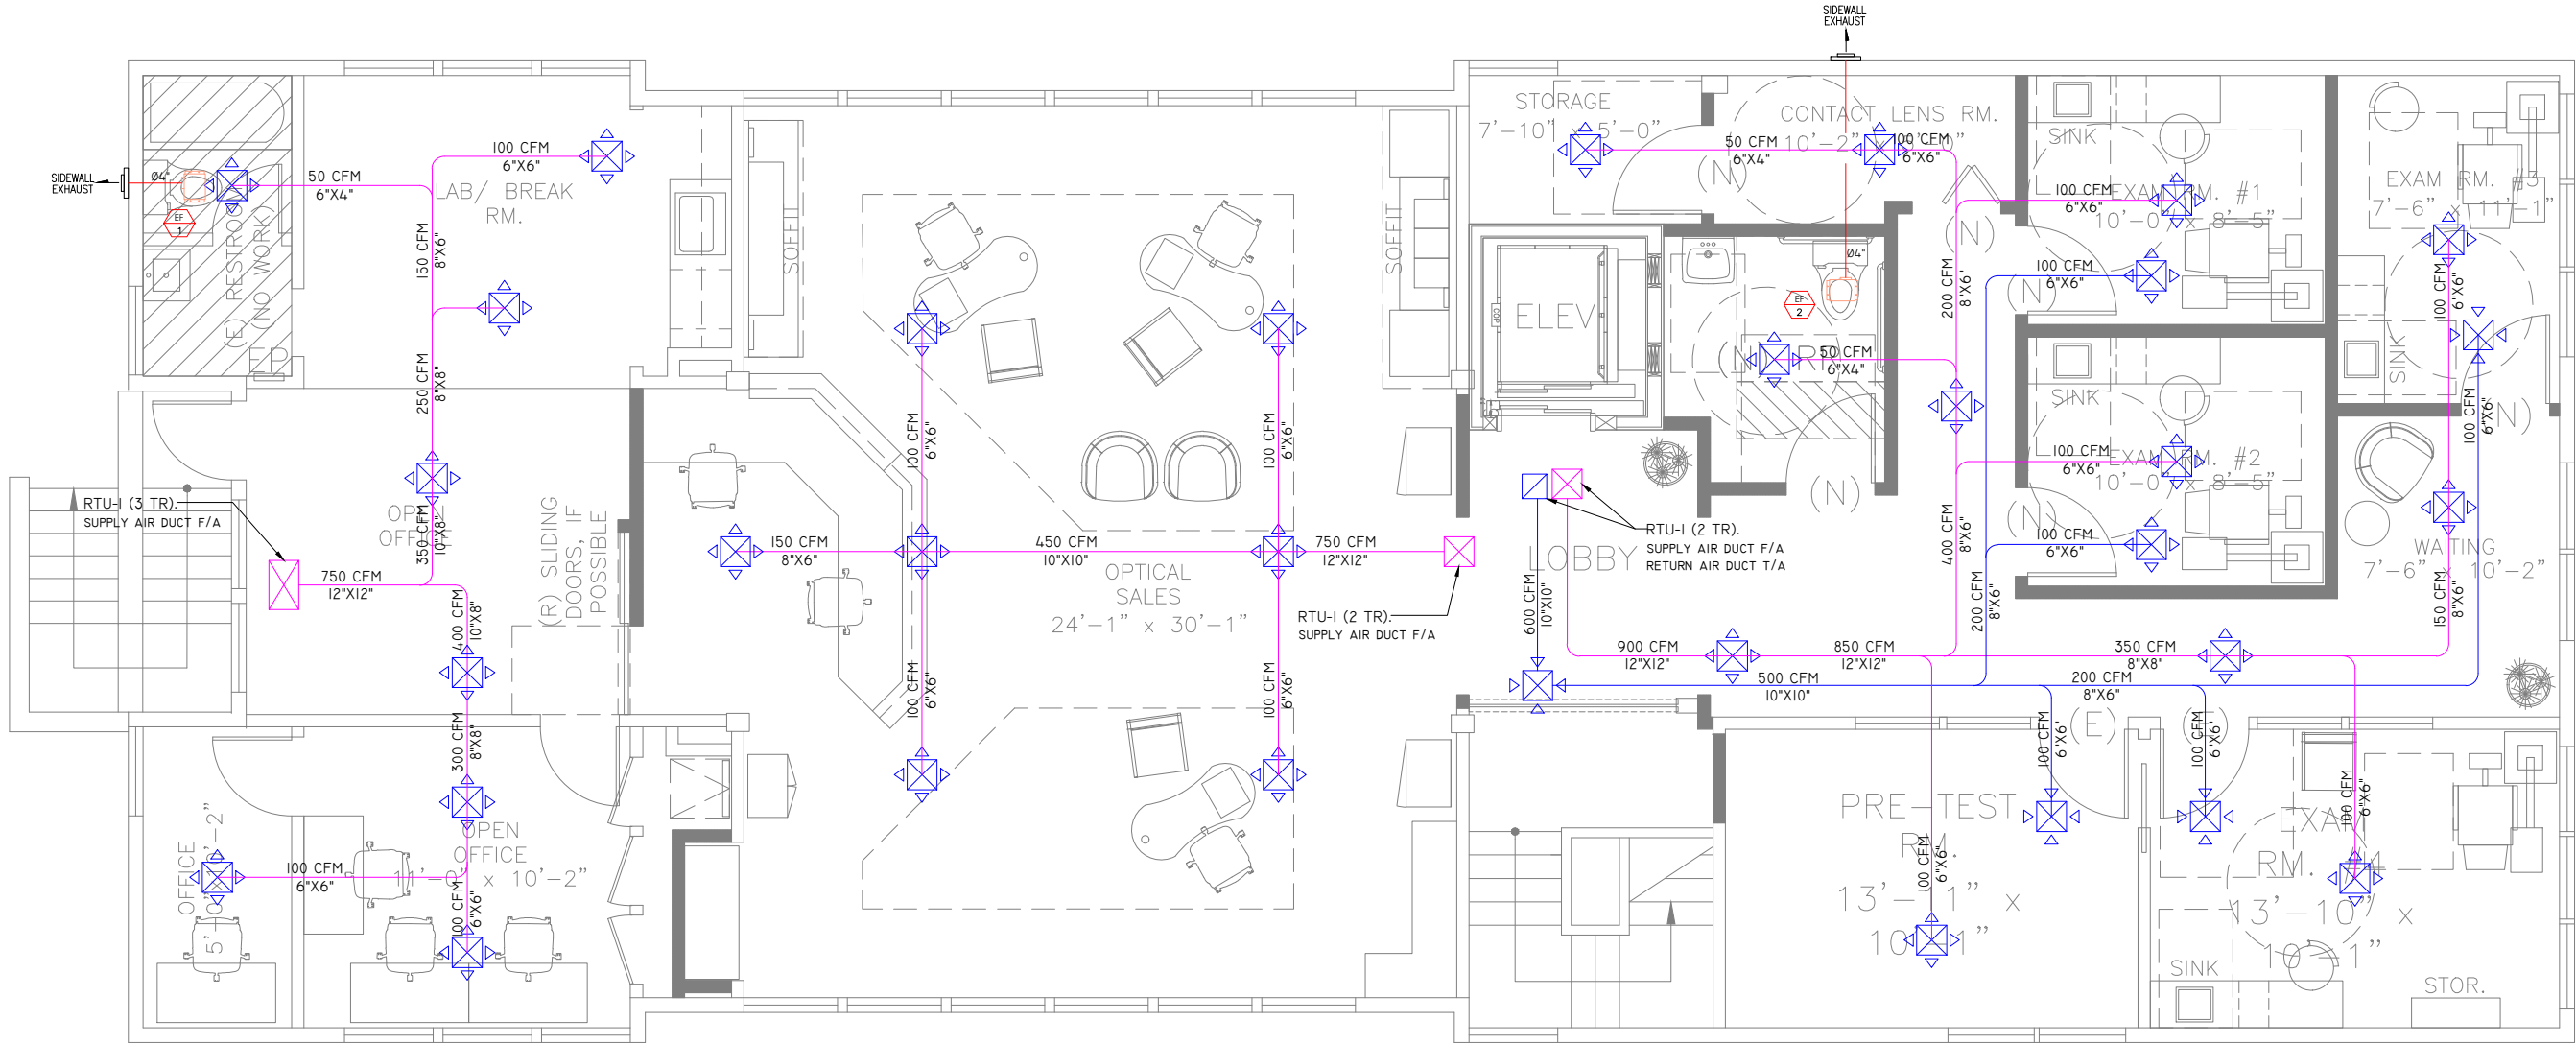ME 02 FIRST FLOOR HVAC PLAN
SCALE 1/8"=1'-0"



ME
03

SECOND FLOOR HVAC PLAN
SCALE 3/16"=1'-0"

AUH-1 SCHEDULE													
MARK	QTY	LOCATION	MANUFACTURER AND MODEL	BTU OUTPUT	SUPPLY CFM	ESP (IN. W.G.)	FUEL	Dimensions L x W x H	Gas Connection Size in	ELECTRICAL V/Ph/Hz	MCA	MAX FUSE SIZE	WEIGHT
	1	AS SHOWN	AS PER SUPPLIER	24,000	900	0.7	NAT GAS	-	1/2	115/1/60	7.2	15 amp	-
	1	AS SHOWN	AS PER SUPPLIER	24,000	750	0.7	NAT GAS	-	1/2	115/1/60	7.2	15 amp	-
	1	AS SHOWN	AS PER SUPPLIER	24,000	750	0.7	NAT GAS	-	1/2	115/1/60	7.2	15 amp	-

OUTDOOR CONDENSING UNIT													
MARK	QTY	LOCATION	MANUFACTURER	TON	COOLING CAPACITY BTU/H	AMBIENT TEMP	FLA	CIRCUIT BREAKER MAX AMPS	LIQUID LINE SUCTION LINE	REF	ELECTRICAL	WEIGHT	DIMENSIONS
CU 1	1	RD	AS PER SUPPLIER	2.0	24,000	95F	0.5	30	3/8" / 5/8"	R410a	208-1-60	165 LBS	----
CU 2	1	RD	AS PER SUPPLIER	2.0	24,000	95F	0.5	30	3/8" / 5/8"	R410a	208-1-60	165 LBS	----
CU 3	1	RD	AS PER SUPPLIER	2.0	24,000	95F	0.5	30	3/8" / 5/8"	R410a	208-1-60	165 LBS	----

EXHAUST FAN SCHEDULE												
MARK	QTY	LOCATION	MANUFACTURER AND MODEL	TYPE	CFM	E.S.P. (IN. W.G.)	MOTOR DATA			SONES	OPTIONS -ACCESSORIES	WEIGHT
							WATTS	SPEED	ELECTRICAL			
	2	GF UTILITY RM	AIR KING AK50 OR EQUAL	CEILING MOUNTED	50	0.25	1500	1	120-1-60	1.5	BACK DRAFT DAMPER CONTROLLED BY SWITCH	10

NOTES:
VERIFY WITH ARCHITECT/OWNER FOR EXACT MODEL NUMBER BEFORE ROUGH-IN
ALL EXHAUST FANS TO BE ENERGY STAR CERTIFIED

DRAWING LEGEND	
SYMBOL	DESCRIPTION
	OUTDOOR AIR CONDENSING UNIT
	RTU-ROOF TOP UNIT.
	AIR SUPPLY DUCT. SIZE IS SHOWN ON PLAN
	RETURN SUPPLY DUCT. SIZE IS SHOWN ON PLAN
	EXHAUST AIR DUCT. SIZE IS SHOWN ON PLAN
	SUPPLY AIR DIFFUSER ON CEILING
	RETURN AIR DIFFUSER ON CEILING
	EXHAUST FAN
	WALL EXHAUST GRILL

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:














DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
MECHANICAL

PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
SECOND FLOOR HVAC PLAN

DRAWN BY: A.S	CHECKED BY: S.A	DATE: 02 JUL 2023
JOB NO 632	SHT NO ME-03	SCALE: 3/16"=1'-0" @A3

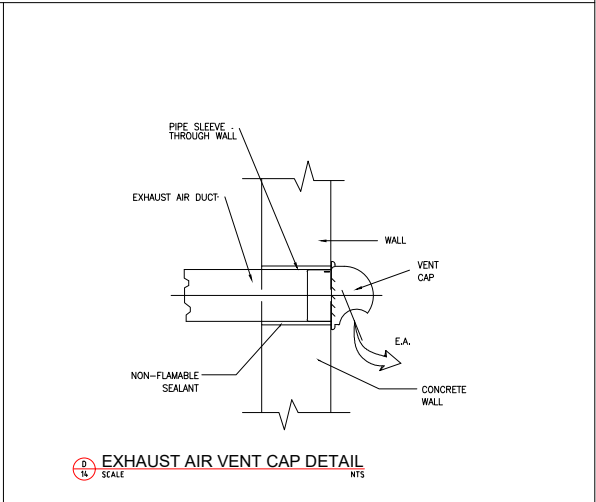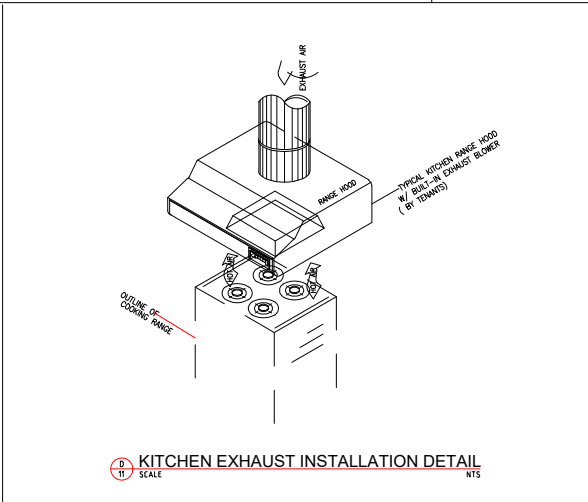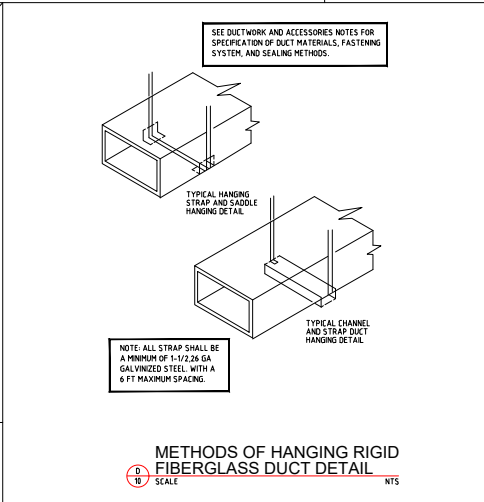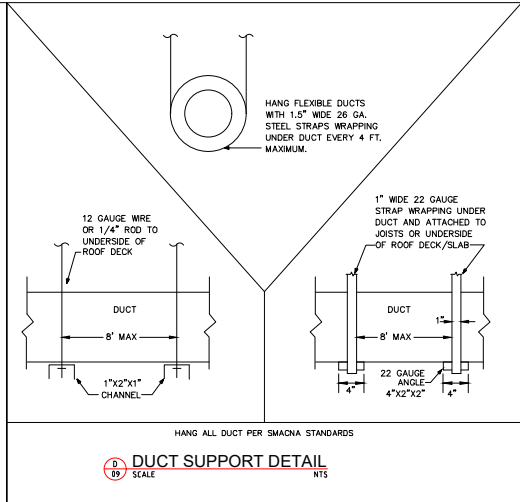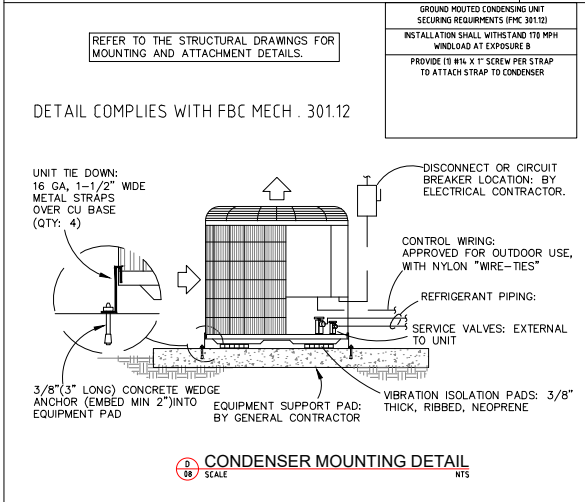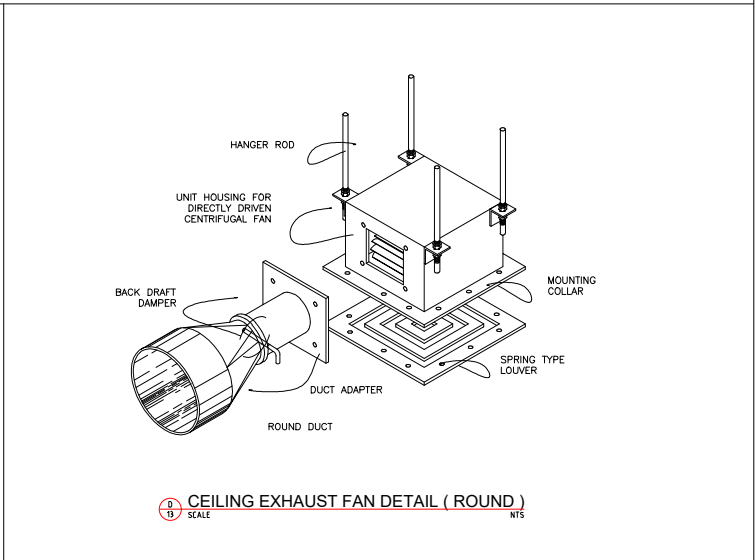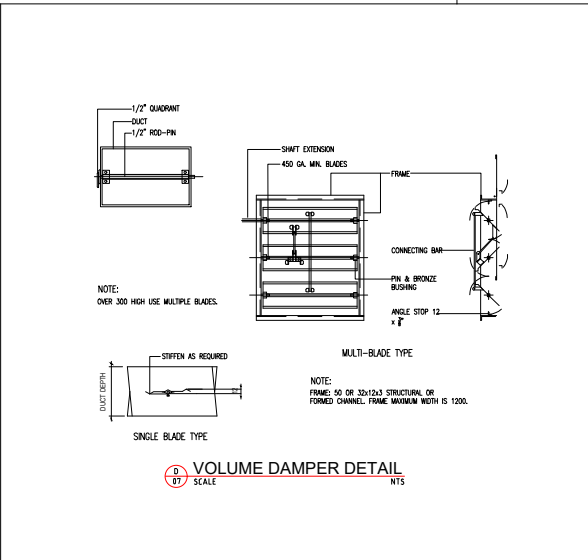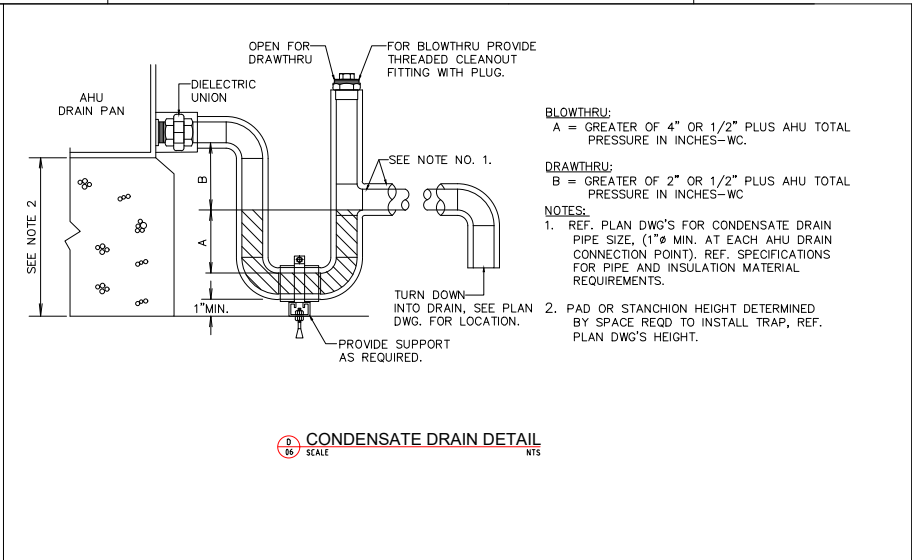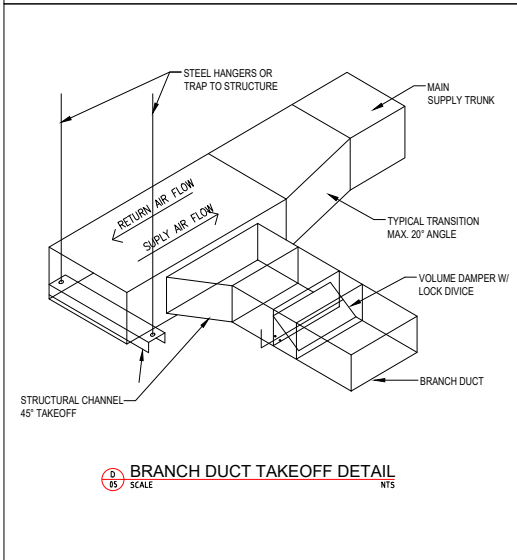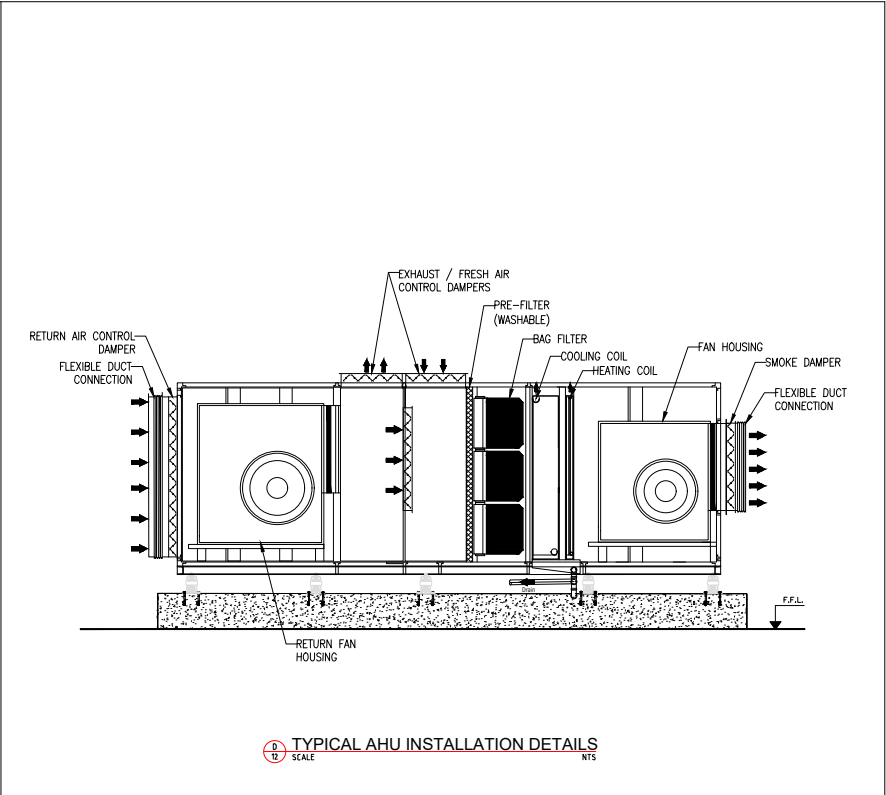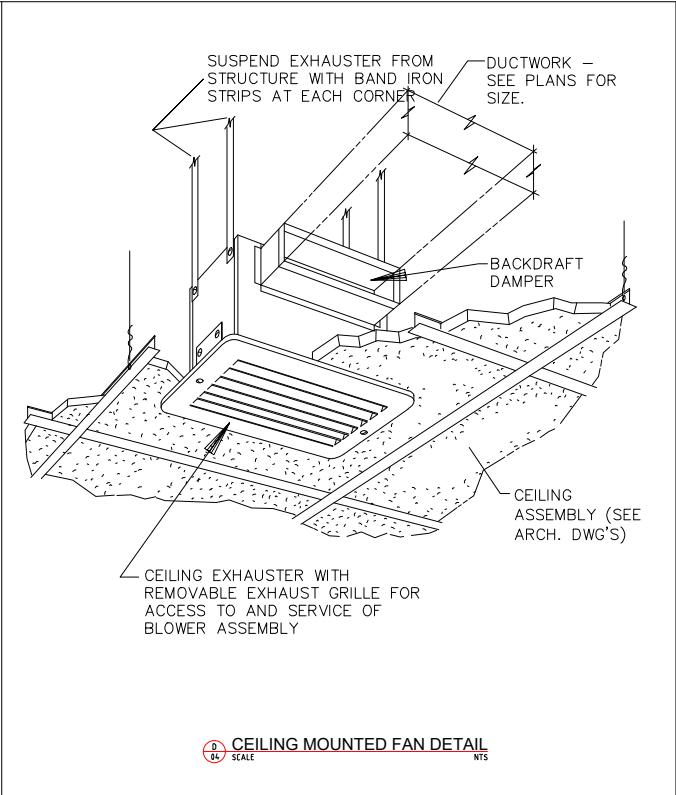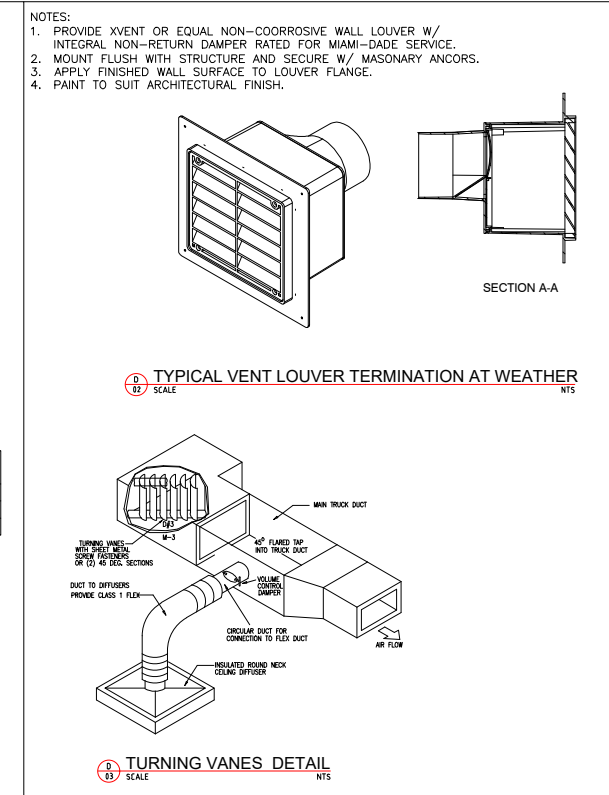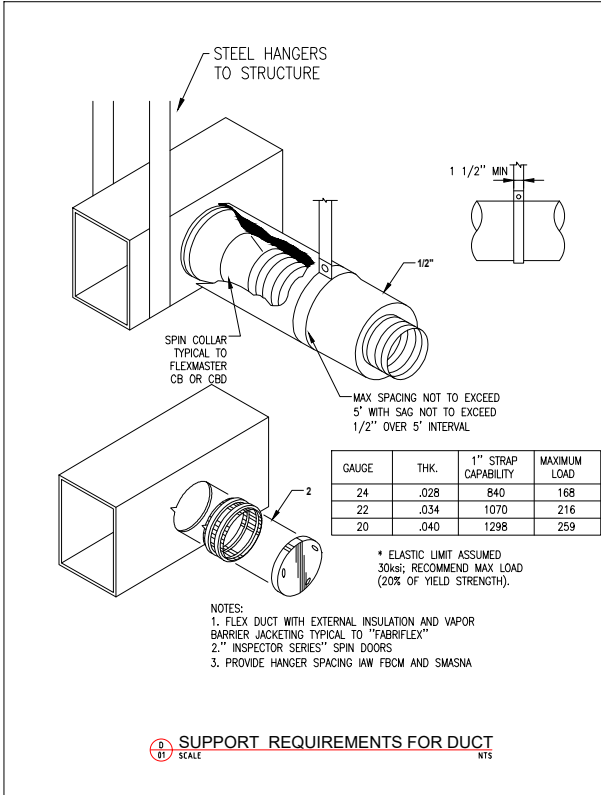

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
MECHANICAL

PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
DETAILS

DRAWN BY: A.S	CHECKED BY: S.A	DATE: 02 JUL 2023
JOB NO 632	SHT NO ME-04	SCALE: NTS @A3