

NEW CONSTRUCTION

150 W. MAIN ST CIRCLEVILLE OHIO 43113

GENERAL NOTES:

1. GENERAL NOTES APPLY TO ALL DRAWINGS
2. DO NOT SCALE DRAWINGS. ANY DIMENSIONAL INFORMATION REQUIRED WHICH IS NOT INDICATED ON DRAWING DIMENSION STRINGS SHALL BE OBTAINED FROM THE ARCHITECT.
3. DIMENSIONS SHOWN ARE FINISH SURFACE OF EXISTING CONSTRUCTION, UNLESS NOTED OTHERWISE .
4. CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS (I.E EXISTING MATERIALS, FRAMING MEMBER SIZES AND LOCATIONS, METHODS OF CONSTRUCTION). IF DISCREPANCIES ARE FOUND, NOTIFY ARCHITECT BEFORE PROCEEDING WITH WORK.
5. CONTRACTOR SHALL MAINTAIN THE IMMEDIATE CONSTRUCTION SITE IN A SECURE, CLEAN AND SAFE MANNER.
6. PROTECTION : CONTRACTORS SHALL BE SOLELY RESPONSIBLE FOR TAKING ALL STEPS NECESSARY TO PROTECT THE PUBLIC FROM INJURY AND ADJACENT PROPERTY DAMAGES DURING CONSTRUCTION AS REQUIRED BY LOCAL CODES.

SCOPE OF WORK:

1. ELECTRICAL
2. PLUMBING

APPLICABLE CODES:

1. 2018 International Building Code with local amendments.
2. 2018 International Existing Building Code.
3. 2018 International Energy Conservation Code.
4. 2017 ANSI A-117.1 Accessible & Useable Building & facilities.
5. 2018 International Plumbing Code with local amendments.
6. 2018 International Mechanical Code with local amendments.
7. 2018 International Fuel Gas Code with local amendments.
8. 2017 National Electric Code.
9. 2018 International Fire Code with local amendments.

INDEX TO DRAWINGS

SHEET NUMBER	SHEET NAME
ARCHITECTURAL	
AR-01	COVER SHEET
AR-02	FLOOR PLANS
ELECTRICAL	
EL-01	NOTES
EL-02	FLOOR PLAN
EL-01	PANEL SCHEDULE & SINGLE LINE DIAGRAM
PLUMBING	
PL-01	NOTES
PL-02	FLOOR PLAN
PL-03	RISER DIAGRAM
PL-04	DETAILS

OWNER SIGNATURE

REVISION STATUS

Rev	DATE	DESCRIPTION	DRAWN BY
00	24-08-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS

APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

150 W. MAIN ST CIRCLEVILLE OHIO 43113

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL:TS9DESIGNS@GMAIL.COM

DRAWING STATUS:

RESTAURANT

DISCIPLINE: ARCHITECTURAL


PROJECT TITLE:

HOME DESIGN


DRAWING TITLE:

FLOOR PLANS

DRAWN BY:	CHECKED BY:	DATE:
A.S	N.B	24 AUG. 2023
JOB NO	SHT NO	SCALE:
632-009	AR-01	NTS @A3

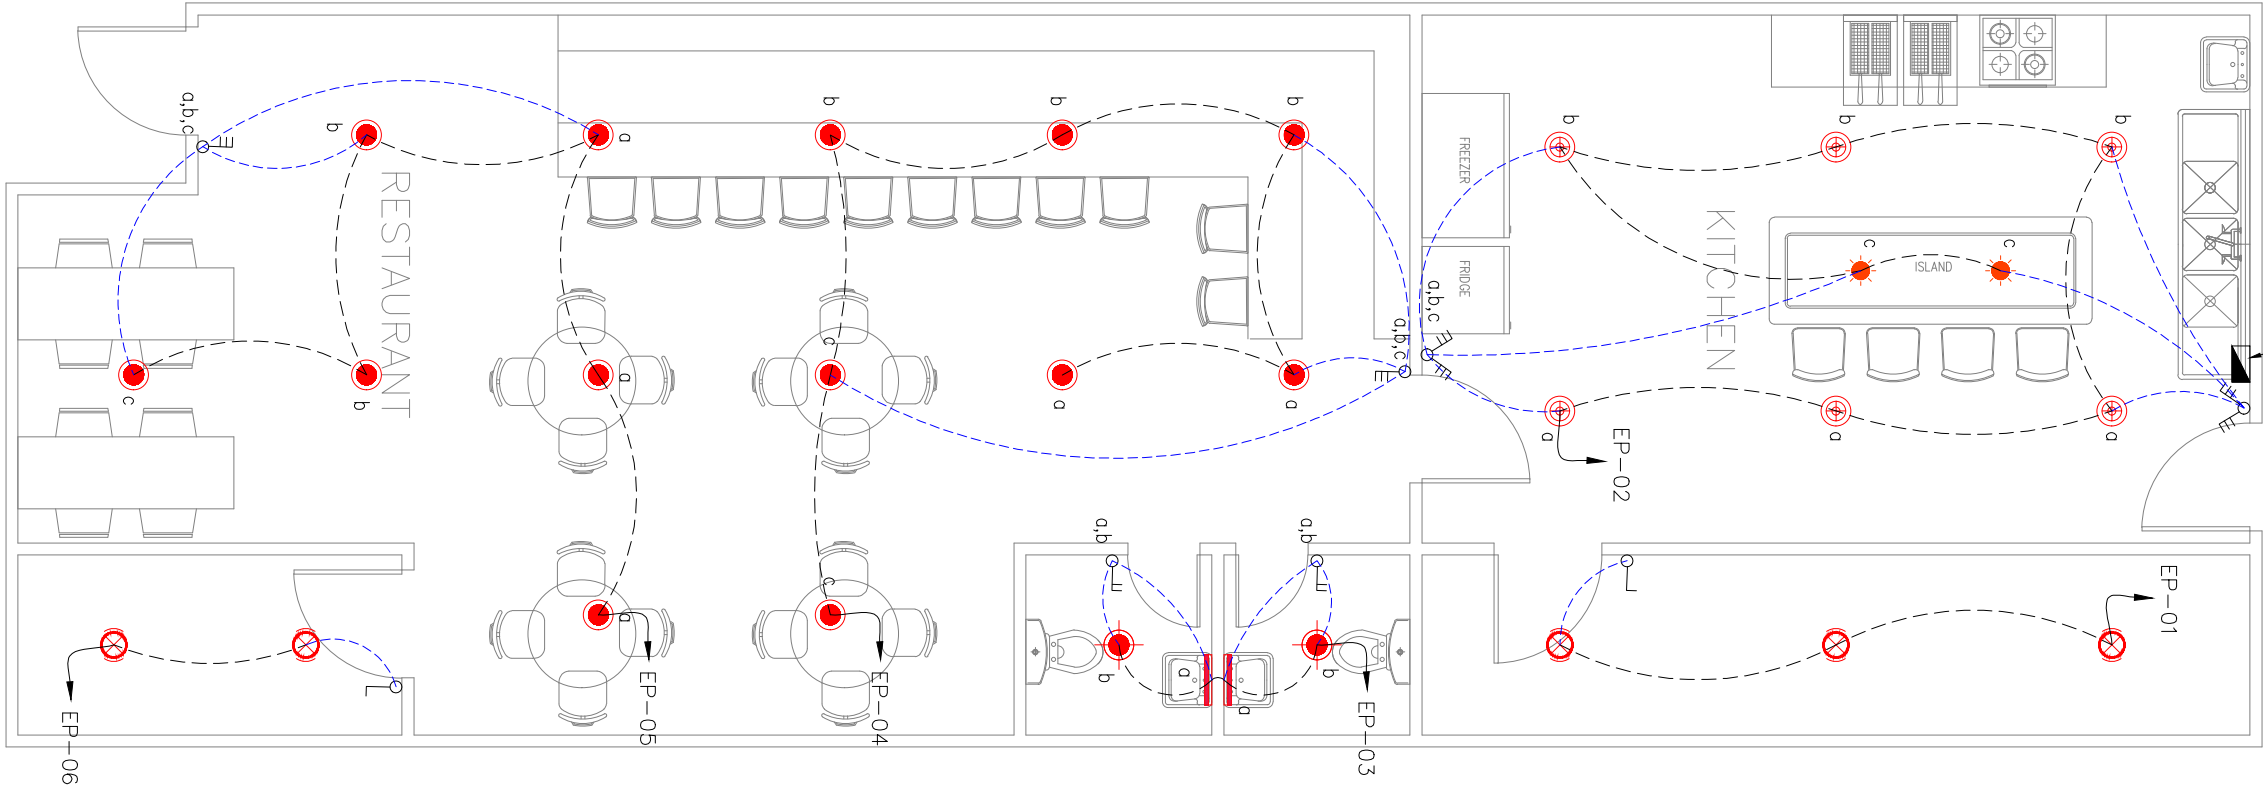

EL 02 LIGHTING FLOOR PLAN
SCALE 3/16"=1'-0"

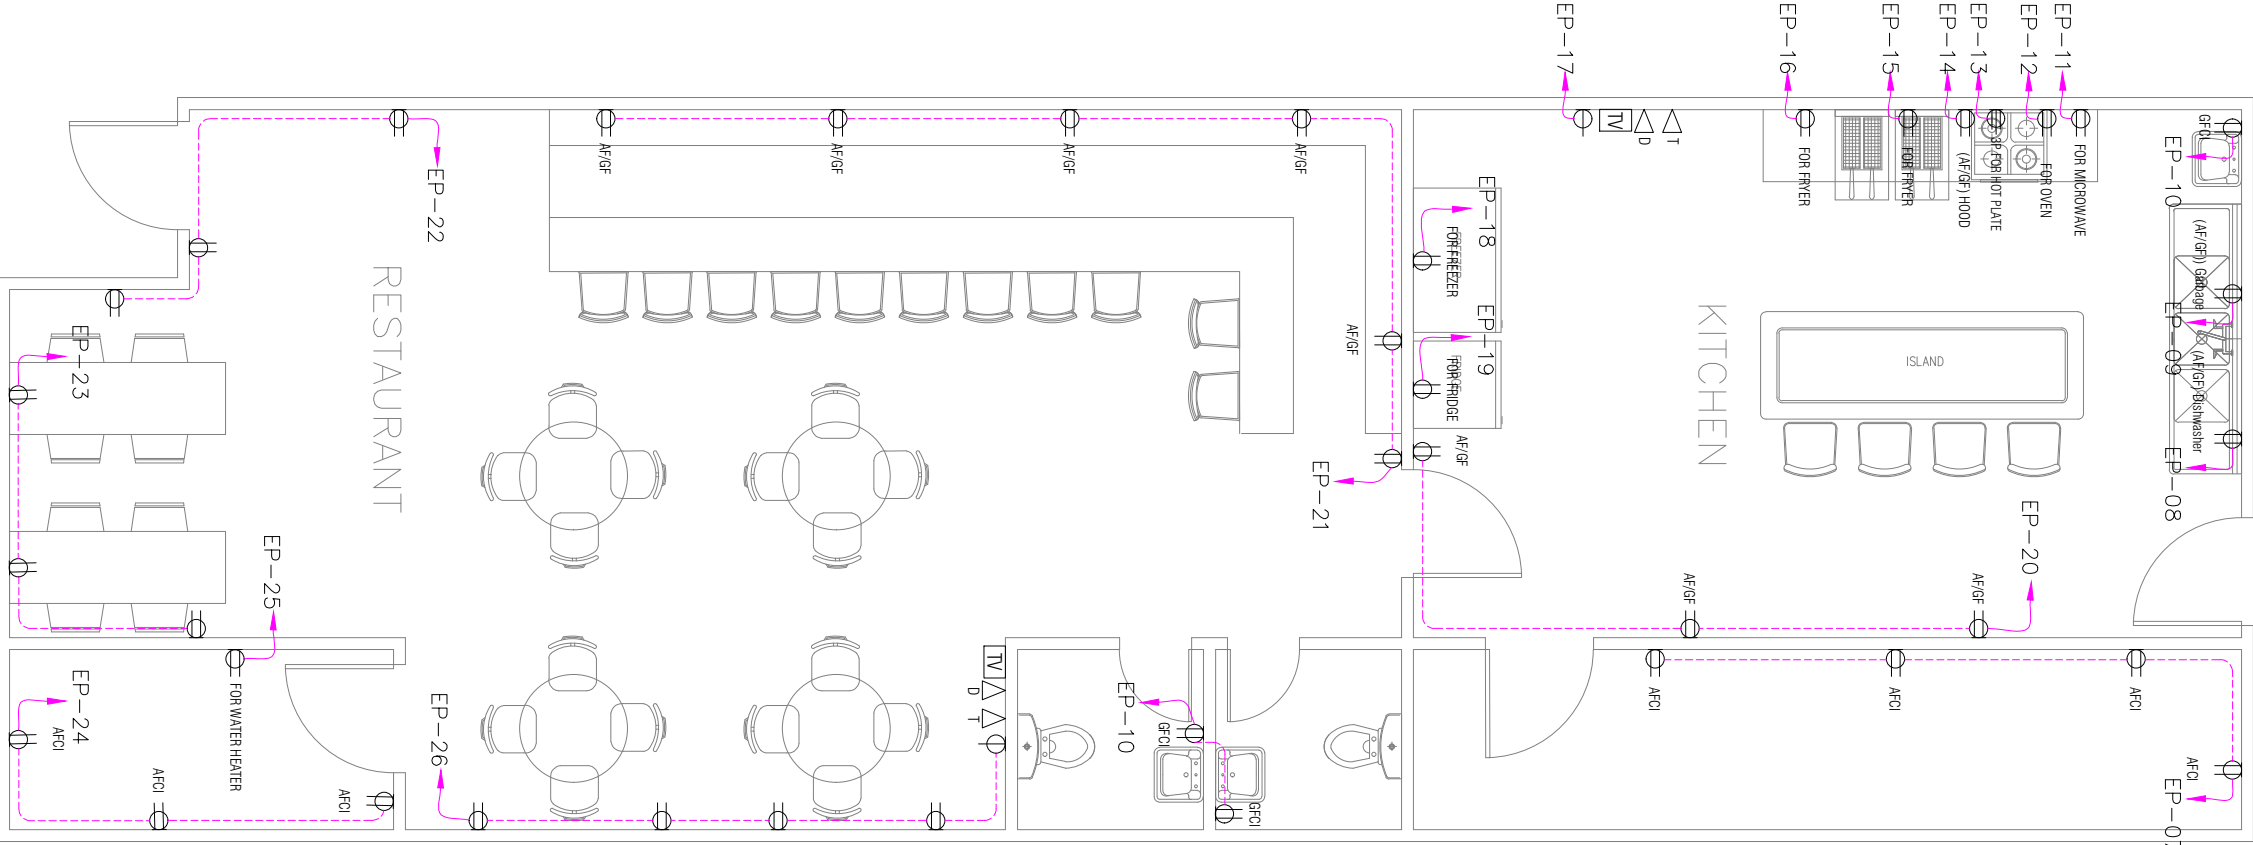

EL 02 POWER FLOOR PLAN
SCALE 3/16"=1'-0"

GENERAL ELECTRICAL NOTES
1-ELECTRICAL CONTRACTOR TO VERIFY ALL EXISTING SITE CONDITIONS & MAKE ANY NECESSARY ADJUSTMENTS.
2- SMALLEST WIRE & SIZE TO BE 14-2
3- ALL WORK SHALL COMPLY WITH THE NATIONAL ELECTRIC CODE & ANY OTHER APPLICABLE REGULATIONS OR CODES, AT THE SITE.
4- CONTRACTOR TO LOCATE PHONE, CABLE, ETC. AS PER OWNER'S SPECIFICATIONS.

LEGEND NOTES:
VERIFY ALL MOUNTING HEIGHTS OF WALL MOUNTED LIGHT FIXTURES
TYPICAL MOUNTING HEIGHTS FOR OUTLETS - CENTERLINE 16" AFF (EXCEPT WHERE NOTED OTHERWISE)
\$ MAXIMUM HEIGHT FOR ALL SWITCHES IS 48" AFF
ROCKER STYLE SWITCHES
ALL SWITCHES /OUTLETS /COVER PLATES- WHITE FINISH
VENT FANS SIZED FOR ROOM VOLUME
FAN SOUND LEVEL NOT TO EXCEED 1.0 SONES



: LEGEND :	
SYMBOL	DESCRIPTION
	18W SURFACE TYPE DOWN LIGHT WITH SPIN ALUMINUM BODY REFLECTOR, LAMP IN BED ROOMS,
	15W SURFACE MOUNTED LIGHT IN KITCHEN
	20W RECESS TYPE DOWN LIGHT WITH SPIN ALUMINUM BODY REFLECTOR, GLASS DIFFUSER & COMPACT FLU. LAMP IN BATHROOMS & LAUNDRY AREA
	MIRROR LIGHT 1X15W FLUORESCENT LIGHT
	15W SURFACE MOUNTED LIGHT IN LIVING AREA
	20W LED 2D BULKHEAD ISLAND LIGHTING
	ONE WAY ONE GANG SWITCH
	ONE WAY TWO GANG SWITCH
	ONE WAY THREE GANG SWITCH
	TWO WAY ONE GANG SWITCH
	TWO WAY TWO GANG SWITCH
	TWO WAY THREE GANG SWITCH
	SPIN ELECTRICAL PANEL TYPE INDICATED.

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	24-08-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

150 W. MAIN ST CIRCLEVILLE OHIO 43113

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL:TS9DESIGNS@GMAIL.COM

DRAWING STATUS:
RESTAURANT


DISCIPLINE:
ELECTRICAL

PROJECT TITLE:
HOME DESIGN

DRAWING TITLE:
ELECTRICAL FLOOR PLAN

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 24 AUG. 2023
JOB NO 632-009	SHT NO EL-02	SCALE: 3/16"=1'-0" @A3

PANELBOARD SCHEDULE																					
PANEL TAG:		EP-01				MAINS: 200A T/250A F, 110/120V, 3P,60HZ										NEUTRAL: YES					
LOCATION:		FLOOR PLAN				MOUNTING: SURFACE MOUNTED										GROUND: YES					
ENCLOSURE:		IP42				VOLTAGE 110/120V, 3P,4W															
FEEDER ENTRANCE:		TOP																			
LOAD SERVED	Romex Wire Size (Inch)	LOAD (VA)			C B	P O L E	CKT NO.	R	Y	B	C K T N O .	P O L E	C B	LOAD (VA)			WIRE & CONDUIT SIZE (INCH)	LOAD SERVED			
		ØA	ØB	ØC										ØA	ØB	ØC					
LIGHTING	#14 ROMEX	60.00			20	1P	1				2	1P	20	160.00			#14 ROMEX	LIGHTING			
LIGHTING	#14 ROMEX		80.00		20	1P	3				4	1P	20		140.00		#14 ROMEX	LIGHTING			
LIGHTING	#14 ROMEX			120.00	20	1P	5				6	1P	20			80.00	#14 ROMEX	LIGHTING			
RECEPTACLE	#12 ROMEX	800.00			20	1P	7				8	1P	15	1000.00			#12 ROMEX-1/2" C	DISHWASHER (A/F/GF)			
GARBA GE (A/F/GF)	#12 ROMEX-1/2" C		1000.00		15	1P	9				10	1P	20		600.00		#12 ROMEX	RECEPTACLE -GFCI			
MICROWA VE (A/F/GF)	#12 ROMEX-1/2" C			1500.00	20	1P	11				12	2P	50			1500.00	2#6 ROMEX-1#10ROM-3/4" C	RECEPTACLE(OVEN)			
RECEPTACLE(HOT PLA TE)	2#6 ROMEX-1#10ROM-3/4" C	400.00			50	2P	13				14	1P	20	1500.00			#12 ROMEX-1/2" C	HOOD (A/F/GF)			
RECEPTACLE -FRYER	#12 ROMEX		200.00		20	1P	15				16	1P	20		200.00		#12 ROMEX	RECEPTACLE -FRYER			
RECEPTACLE	#12 ROMEX			200.00	20	1P	17				18	1P	20			1500.00	#12 ROMEX-1/2" C	REFRIGERA TOR (A/F/GF)			
REFRIGERA TOR (A/F/GF)	#12 ROMEX-1/2" C	1500.00			20	1P	19				20	1P	20	600.00			#12 ROMEX	RECEPTACLE -A/F/GF			
RECEPTACLE -A F/GF	#12 ROMEX		1200.00		20	1P	21				22	1P	20		600.00		#12 ROMEX	RECEPTACLE			
RECEPTACLE	#12 ROMEX			600.00	20	1P	23				24	1P	20			600.00	#12 ROMEX	RECEPTACLE -A/F/GF			
WATER HEATER	2#8 ROMEX-1#10ROM-3/4" C	2500.00			50	2P	25				26	1P	20	1000.00			#12 ROMEX	RECEPTACLE			
Air Handler breaker	2#8 ROMEX-1#10ROM-3/4" C		2500.00		60	1P	27				28	1P	60		5000.00		2#8 ROMEX-1#10ROM-3/4" C	RECEPTACLE(A/C)			
Heat Pump	2#8 ROMEX-1#10ROM-3/4" C			2500.00	60	1P	29				30	1P	20				#12 ROMEX	SPARE			
SPARE	#12 ROMEX				20	1P	31				32	1P	20				#12 ROMEX	SPARE			
SPARE	#12 ROMEX				20	1P	33				34	1P	20				#12 ROMEX	RECEPTACLE			
											36	1P	20				#12 ROMEX	SPARE			
											38	1P	20				#12 ROMEX	SPARE			
		5260.00	4980.00	4920.00										4260.00	6540.00	3680.00					
		ØA = 9520.00														TOTAL CONNECTED LOAD = 29640.00				I (AMP) = 70.37	
		ØB = 11520.00														DEMAND FACTOR = 1					
		ØC = 8600.00														TOTAL CONNECTED LOAD +25% SPARE= 37050.00					

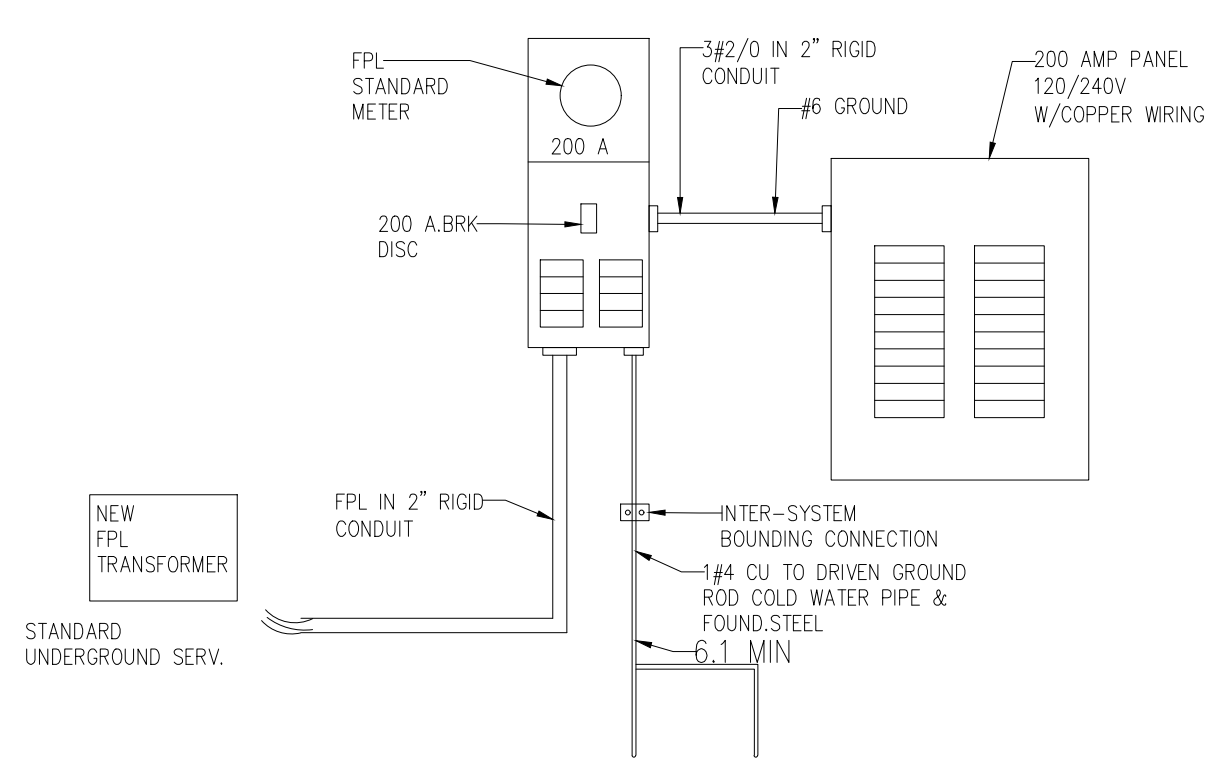

SPECIAL NOTES :
FPL WILL PROVIDE
NEW TRANSFORMER
NEW WIRING FROM TRANSFORMER
TO METER/MAIN COMBO

EL 03 SINGLE LINE DIAGRAM SCALE NTS

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	24-08-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

150 W. MAIN ST CIRCLEVILLE OHIO 43113

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL:TS9DESIGNS@GMAIL.COM

DRAWING STATUS:
RESTAURANT

DISCIPLINE:
ELECTRICAL

PROJECT TITLE:
HOME DESIGN

DRAWING TITLE:
PANEL SCHEDULE &
SINGLE LINE DIAGRAM

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 24 AUG. 2023
JOB NO 632-009	SHT NO EL-03	SCALE: NTS @A3

GENERAL PLUMBING NOTES:

1. LOCATION AND SIZES OF ALL EXISTING SERVICES ARE APPROXIMATE. VERIFY ALL UTILITIES PRIOR TO COMMENCING WORK.
2. FOR EXACT LOCATION OF PLUMBING FIXTURES, DRAINS AND EQUIPMENT SEE ARCHITECTURAL DRAWINGS.
3. ALL DOMESTIC WATER AND VENT PIPING SHOWN TO BE RUN ABOVE CEILING UNLESS OTHERWISE NOTED.
4. ALL SANITARY PIPING SHOWN TO BE RUN BELOW FLOOR UNLESS OTHERWISE NOTED.
5. ENTIRE INSTALLATION INCLUDING MATERIALS, EQUIPMENT AND WORKMANSHIP SHALL CONFIRM WITH ALL APPLICABLE LAWS, CODES AND REGULATIONS OF MUNICIPAL, STATE AND FEDERAL AUTHORITIES, ALSO THE PLUMBING CODE 2004, INTERNATIONAL BUILDING CODE 2009, AND OTHER REGULATORY BODIES HAVING JURISDICTION OVER THE CLASS OF WORK.
6. THE CONTRACTOR SHALL MAKE TESTS FOR ACCEPTANCE AND APPROVAL AS REQUIRED BY THE CODE. REQUIRED TESTS SHALL BE PERFORMED IN THE PRESENCE OF OWNER’S REPRESENTATIVE UNLESS WAIVED IN WRITING.
7. THE CONTRACTOR SHALL FIELD COORDINATE THE WORK WITH THAT OF ALL OTHER TRADES.
8. ALL DOMESTIC WATER PIPING SHALL BE INSULATED AS REQUIRED.
9. DOMESTIC WATER PIPING MATERIAL: ASTM B88 TYPE L OR M COPPER TUBE WITH WROUGHT OR CAST COPPER FITTINGS AND LEAD–FREE SOLDERED JOINTS. INSTALL DOMESTIC WATER PIPING LEVEL WITHOUT PITCH AND PLUMB.
- DRAIN, WASTE, STORM, AND VENT PIPING MATERIAL: FOR BELOW GROUND SOIL, WASTE AND BENT PIPING SHOULD BE SERVICE WEIGHT HUB AND SPIGOT CAST IRON CONFORMING TO ASTM A74, WITH LEAD AND OAKUM JOINTS AS ALLOWED BY PLUMBING CODE; FOR ABOVE GROUND SOIL, WASTE AND VENT PIPING SHOULD BE HUBLESS CAST–IRON.
10. ANY ITEM OF MATERIALS NOT INDICATED ON THE DRAWINGS OR NOT SPECIFIED AND WHICH ARE REQUIRED FOR THE COMPLETE INSTALLATION OF ANY PART OF THE WORK DESCRIBED, SHALL BE FURNISHED AS CODE REQUIRED.
11. INSTALL CLEANOUT AT OR NEAR THE BOTTOM OF SANITARY/WASTE STACK.
12. PROVIDE PROPER ACCESS PANELS AS SPECIFIED IN WALLS AND CEILINGS FOR ANY EQUIPMENT, DEVICES, VALVES, SHOCK ABSORBERS, TRAP PRIMERS, CLEANOUTS ETC. REQUIRING ACCESS.

PLUMBING FIXTURE AND FAUCETS REFERENCED STANDARDS		
MARK	DESCRIPTION	STANDARD
WC–1	WATER CLOSET	WATER CLOSETS SHALL CONFIRM TO THE WATER CONSUMPTION REQUIREMENTS OF SECTION 604.4 AND SHALL CONFIRM TO ANSI Z124.4. ASME A112.19.2M, CSA B45.1, CSA B45.4 OR CSA B45.5. WATER CLOSETS SHALL CONFIRM TO THE HYDRAULIC PERFORMANCE REQUIREMENTS OF ASME A112.19.9M, CSA B45.1, CSA B45.4 OR CSA B45.5. ELECTRO HYDRAULIC WATER CLOSETS SHALL COMPLY WITH ASME A112.19.13.
L–1	LAVATORY	LAVATORIES SHALL CONFIRM TO ANSI Z124.3. ASME A112.19.1M, ASME A112.19.2M, ASME A112.19.3M, ASME A112.19.4M, ASME A112.19.9M, CSA B45.2, CSA B45.3, CSA B45.4, ROUP WASH UP EQUIPMENT SHALL CONFIRM TO THE REQUIREMENTS OF SECTION 402. EVERY 20 INCHES (608MM) OF RIM SPACE SHALL BE CONSIDERED AS ONE LAVATORY.
KS–1	KITCHEN SINK	SINKS SHALL CONFIRM TO ANSI Z124.6, ASME A112.19.1M, ASME A112.19.2M, ASME A112.19.3M, ASME A112.19.4M, ASME A112.19.9M, CSA B45.1, CSA B45.2, CSA B45.3, OR CSA B45.4,
	FAUCETS AND FIXTURE FITTINGS	FAUCETS AND FIXTURE FITTINGS SHALL CONFORM TO ASME A112.18.1 OR CSA B125. FAUCETS AND FIXTURE FITTINGS THAT SUPPLY DRINKING WATER FOR HUMAN INGESTION SHALL CONFORM TO THE REQUIREMENTS OF NSF 61, SECTION 9. FLEXIBLE WATER CONNECTORS EXPOSED TO CONTINUOUS PRESSURE SHALL CONFORM TO THE REQUIREMENTS OF SECTION 605.6 HAND HELD SHOWERS SHALL CONFORM TO ASSE 1014 OR CSA B125. SHOWER AND TUB SHOWER COMBINATION VALVES SHALL BE BALANCED PRESSURE, THERMOSTATIC OR COMBINATION BALANCED PRESSURE/THERMOSTATIC VALVES THAT CONFORM TO THE REQUIREMENTS OF ASSE 1016 OR CSA B125, MULTIPLE (GANG) SHOWERS SUPPLIED WITH A SINGLE TEMPERED WATER SUPPLY PIPE SHALL HAVE THE WATER SUPPLY FOR SUCH SHOWERS CONTROLLED BY A MASTER THERMOSTATIC MIXING VALVE COMPLYING WITH ASSE 1017. SHOWER AND TUB SHOWER COMBINATION VALVES AND MASTER THERMOSTATIC MIXING VALVES REQUIRED BY THIS SECTION SHALL BE EQUIPPED WITH A MEANS TO LIMIT THE MAXIMUM SETTING OF THE VALVE TO 120°F (49°C), WHICH SHALL BE FIELD ADJUSTED IN ACCORDANCE WITH THE MANUFACTURER’S INSTRUCTIONS. FAUCETS AND FIXTURE FITTINGS WITH HOSE CONNECTED OUTLETS SHALL CONFORM TO ASME A112.18.3M. TEMPERATURE ACTUATED, FLOW REDUCTION DEVICES. WHERE INSTALLED FOR INDIVIDUAL FIXTURE FITTINGS, SHALL CONFORM TO ASSE 1062. SUCH VALVES SHALL NOT BE USED ALONE AS A SUBSTITUTE FOR THE BALANCED PRESSURE. THERMOSTATIC OR COMBINATION SHOWER VALVES REQUIRED IN SECTION 424.3

PLUMBING NOTES:

1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.

2. ALL PLUMBING INSTALLATIONS SHALL CONFIRM WITH THE REQUIREMENTS OF MANUFACTURER RECOMMENDATION AND OR UNIFORM PLUMBING CODE (UPC).

3. ALL PLUMBING MATERIALS SHALL BE AS SPECIFIED IN THE CONTRACT SPECS AND BOQ.

4. ALL PIPE SIZES SHOWN ARE NOMINAL DIAMETER IN INCHES. UNLESS OTHERWISE MENTIONED.

5. INSTALLER SHOULD NOT SCALE THE DRAWING.

6. ALL PIPE PENETRATIONS IN WALL & SLABS SHALL BE THROUGH PIPE SLEEVES.

7. IF ANY ERROR OR OMISSION IS FOUND IN DRAWING THIS OFFICE MAY BE CONSULTED FOR RECTIFICATION.

TABLE 604.4 MAXIMUM FLOW RATES AND CONSUMPTION FOR PLUMBING FIXTURES AND FIXTURE FITTINGS	
PLUMBING FIXTURE R FIXTURE FITTING	MAXIMUM FLOW RATE OR QUANTITY b
LAVATORY, PRIVATE	1.5 gpm at 60 psi
SINK FAUCET	1.5 gpm at 60 psi
WATER CLOSET	1.28 GALLONS PER FLUSHING CYCLE
FOR SI:	1 GALLON = 3.785 L, 1 GALLON PER MINUTE = 3.785 L/M, 1 POUND PER SQUARE INCH = 6.895 KPA.
A.	A HAND HELD SHOWER SPRAY IS A SHOWER HEAD.
B.	CONSUMPTION TOLERANCES SHALL BE DETERMINED FROM REFERENCED STANDARDS.
C.	WATER FACTOR IN GALLONS PER CYCLE CUBIC FOOT
ALL PLUMBING FIXTURES SHALL CONTRIBUTE TO A LEEDS SOLUTION AND SHALL MEET EPA CRITERIA AND BEEN CONSIDERED AS WATER EFFICIENT PRODUCTS AS STIPULATED BY THE LEEDS TA 2009 REFERENCE GUIDE (20% REDUCTION REQUIRED).	
2010 F.B.C PLUMBING AS PER SECTION 604.9 A WATER HAMMER ARRESTOR SHALL BE INSTALLED WHERE QUICK CLOSING VALVES ARE UTILIZED. WATER HAMMER ARRESTORS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS. WATER HAMMER ARRESTORS SHALL CONFORM TO ASSE 1010.	



OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	24-08-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

150 W. MAIN ST CIRCLEVILLE OHIO 43113

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL:TS9DESIGNS@GMAIL.COM

DRAWING STATUS:

RESTAURANT

DISCIPLINE: PLUMBING


PROJECT TITLE:

HOME DESIGN

DRAWING TITLE:

NOTES

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 24 AUG. 2023
JOB NO 632-009	SHT NO PL-01	SCALE: NTS @A3

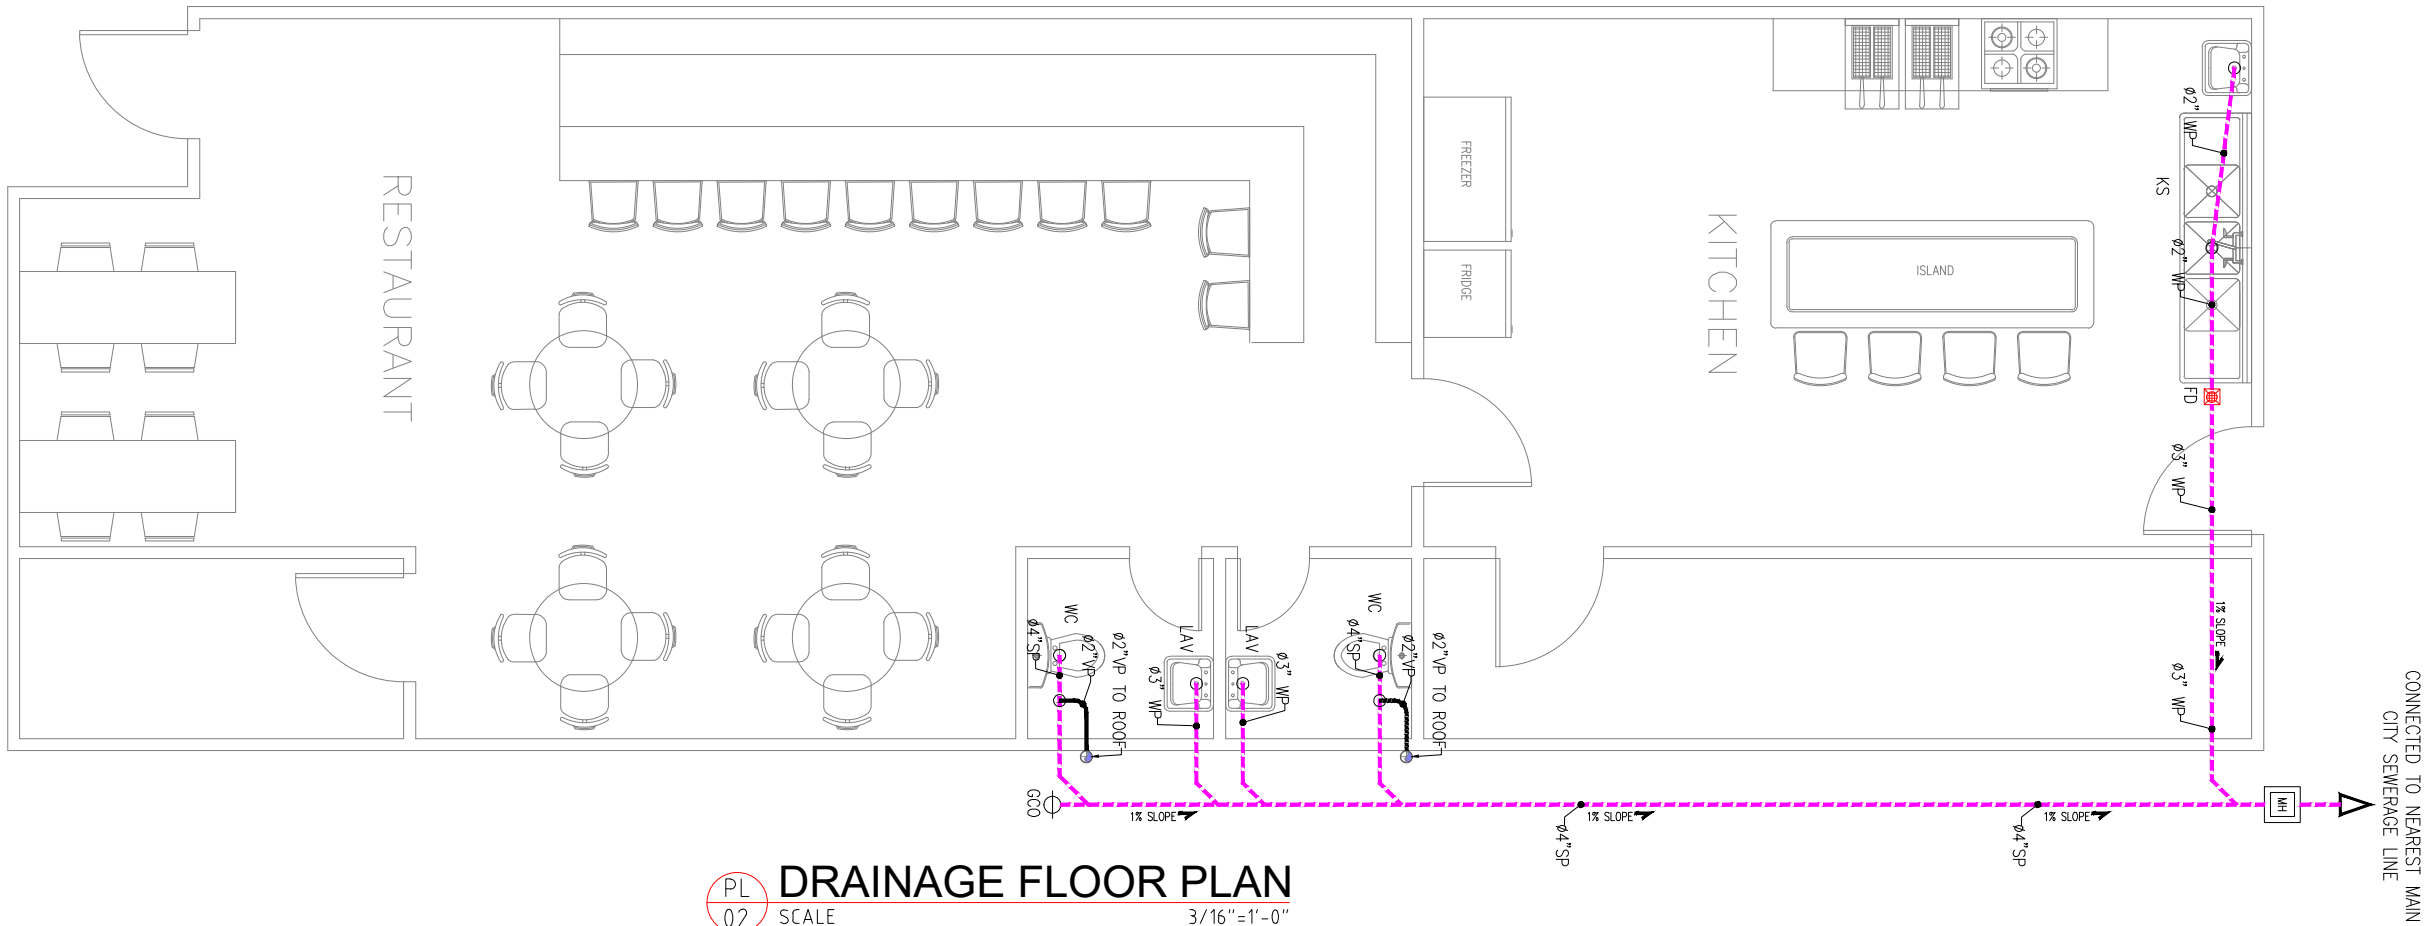

PLUMBING LEGEND:	
SYMBOL	DESCRIPTION
---	HWS — HOT WATER SUPPLY
---	CWS — COLD WATER SUPPLY
---	VP—VENT PIPE
---	SP—SOIL PIPE
---	WP—WASTE PIPE
---	SHUT OFF VALVE
---	GATE VALVE
WH	WATER HEATER
GT	GREASE TRAP
WC	WATER CLOSET
KS	KITCHEN SINK
AS	ABLUTION SPRAY
FCO	FLOOR CLEANOUT
FD	FLOOR DRAIN
LAV	LAVATORY



OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	24-08-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

150 W. MAIN ST CIRCLEVILLE OHIO 43113

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL:TS9DESIGNS@GMAIL.COM


DRAWING STATUS:
RESTAURANT

DISCIPLINE:
PLUMBING


PROJECT TITLE:
HOME DESIGN

DRAWING TITLE:
PLUMBING FLOOR PLAN


DRAWN BY: A.S	CHECKED BY: N.B	DATE: 24 AUG. 2023
JOB NO 632-009	SHT NO PL-02	SCALE: 3/16"=1'-0" @A3

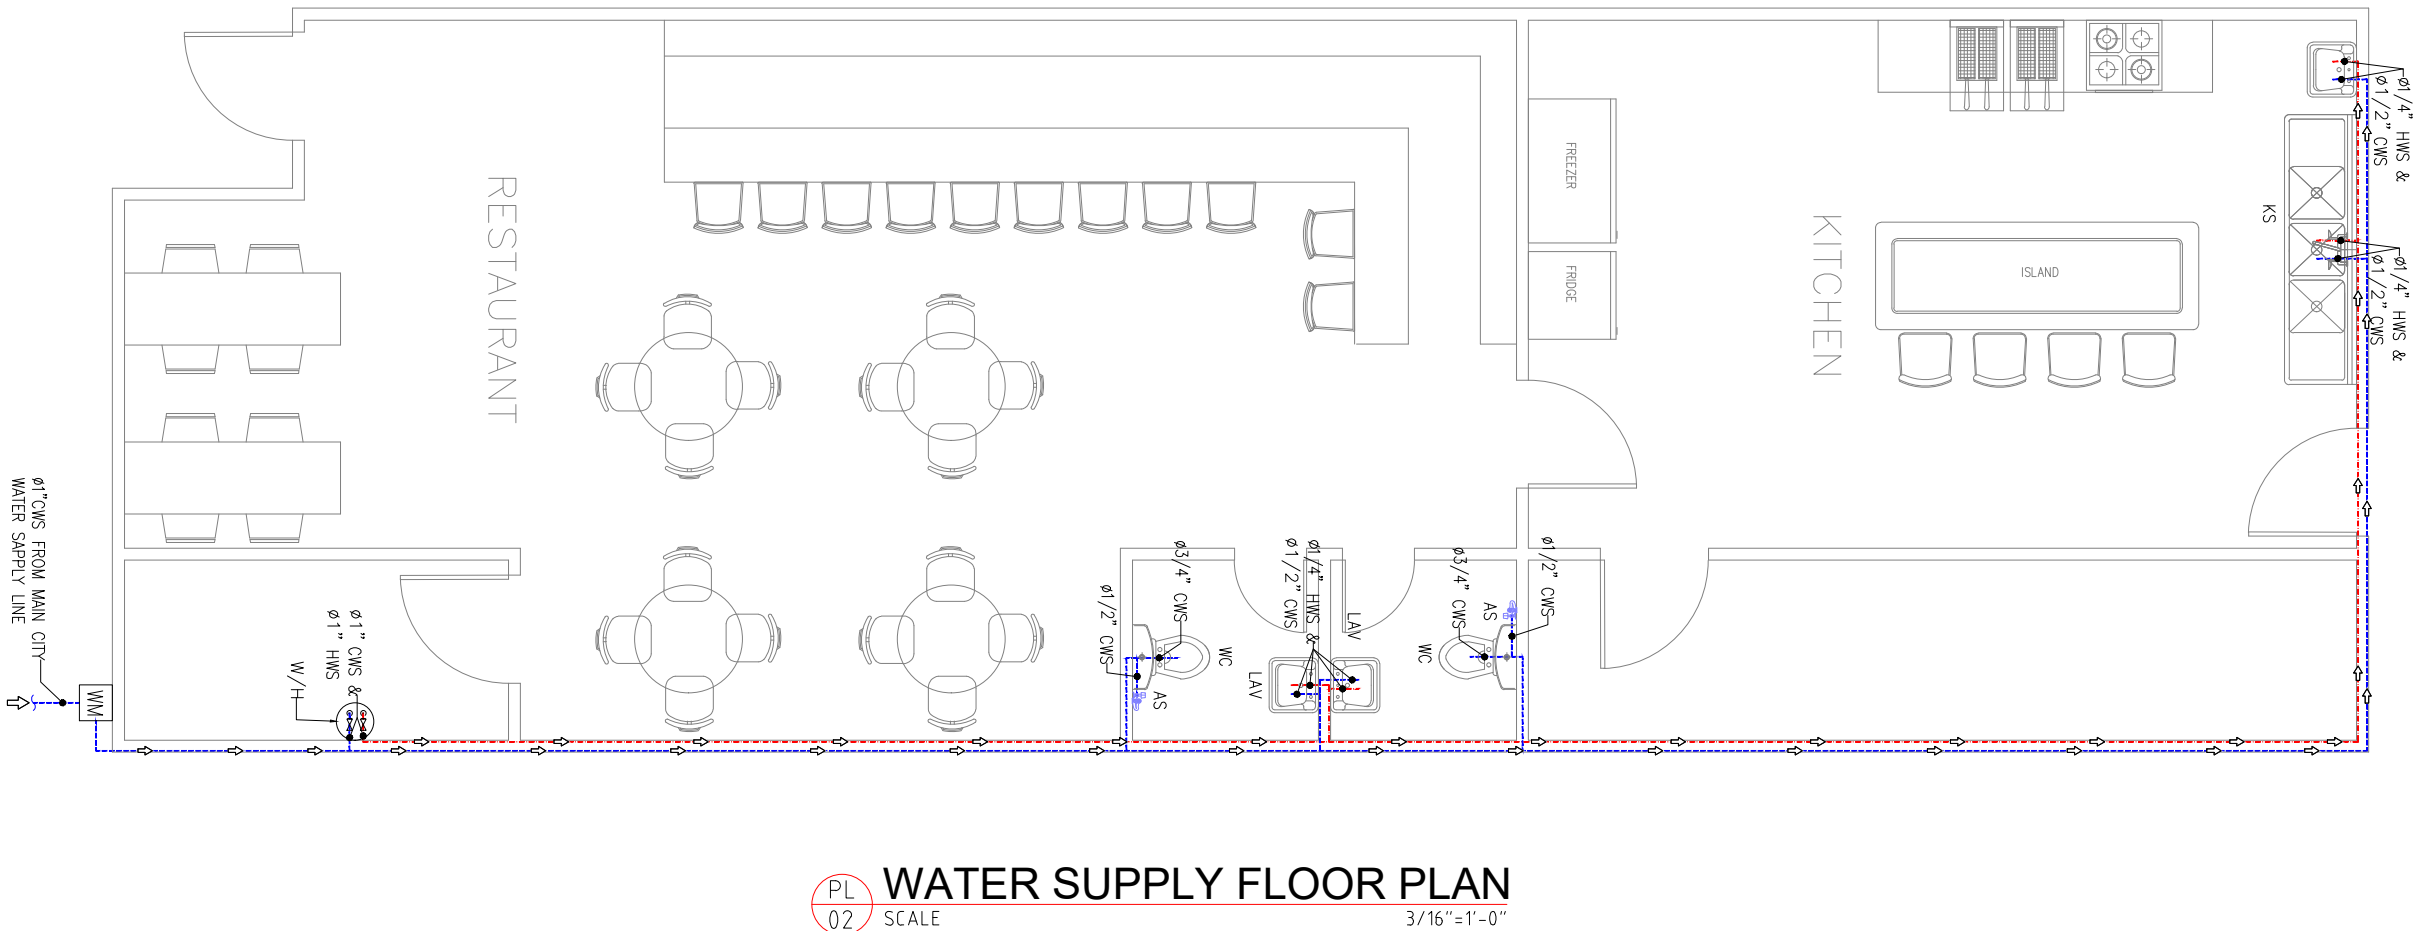

PL 02 WATER SUPPLY FLOOR PLAN
SCALE 3/16"=1'-0"

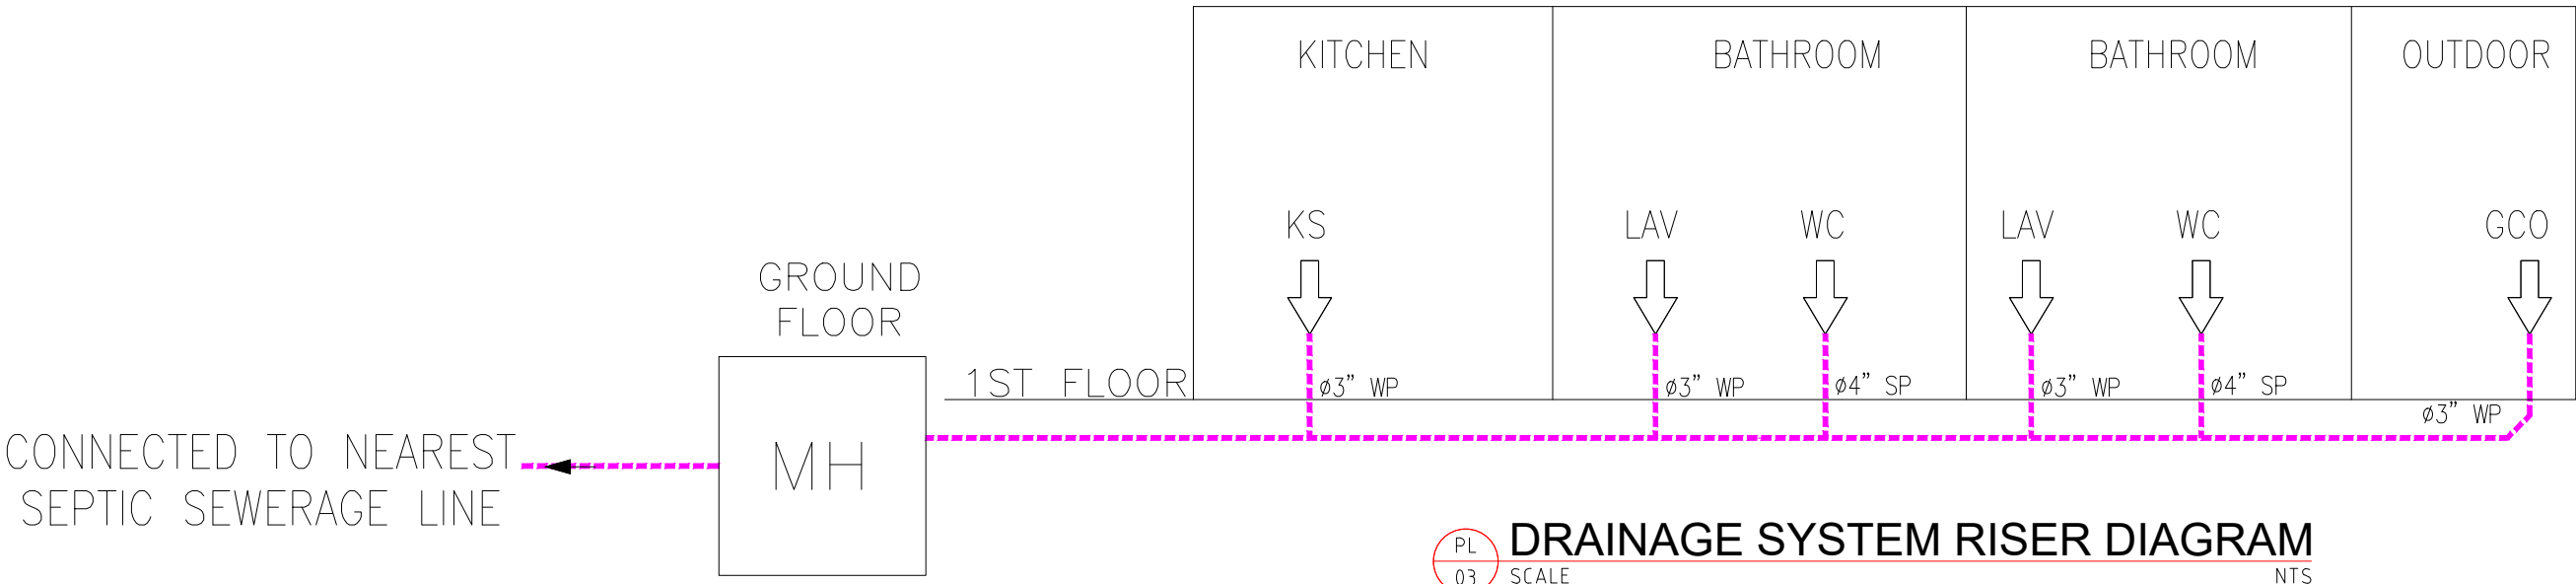

PL 03 DRAINAGE SYSTEM RISER DIAGRAM SCALE NTS

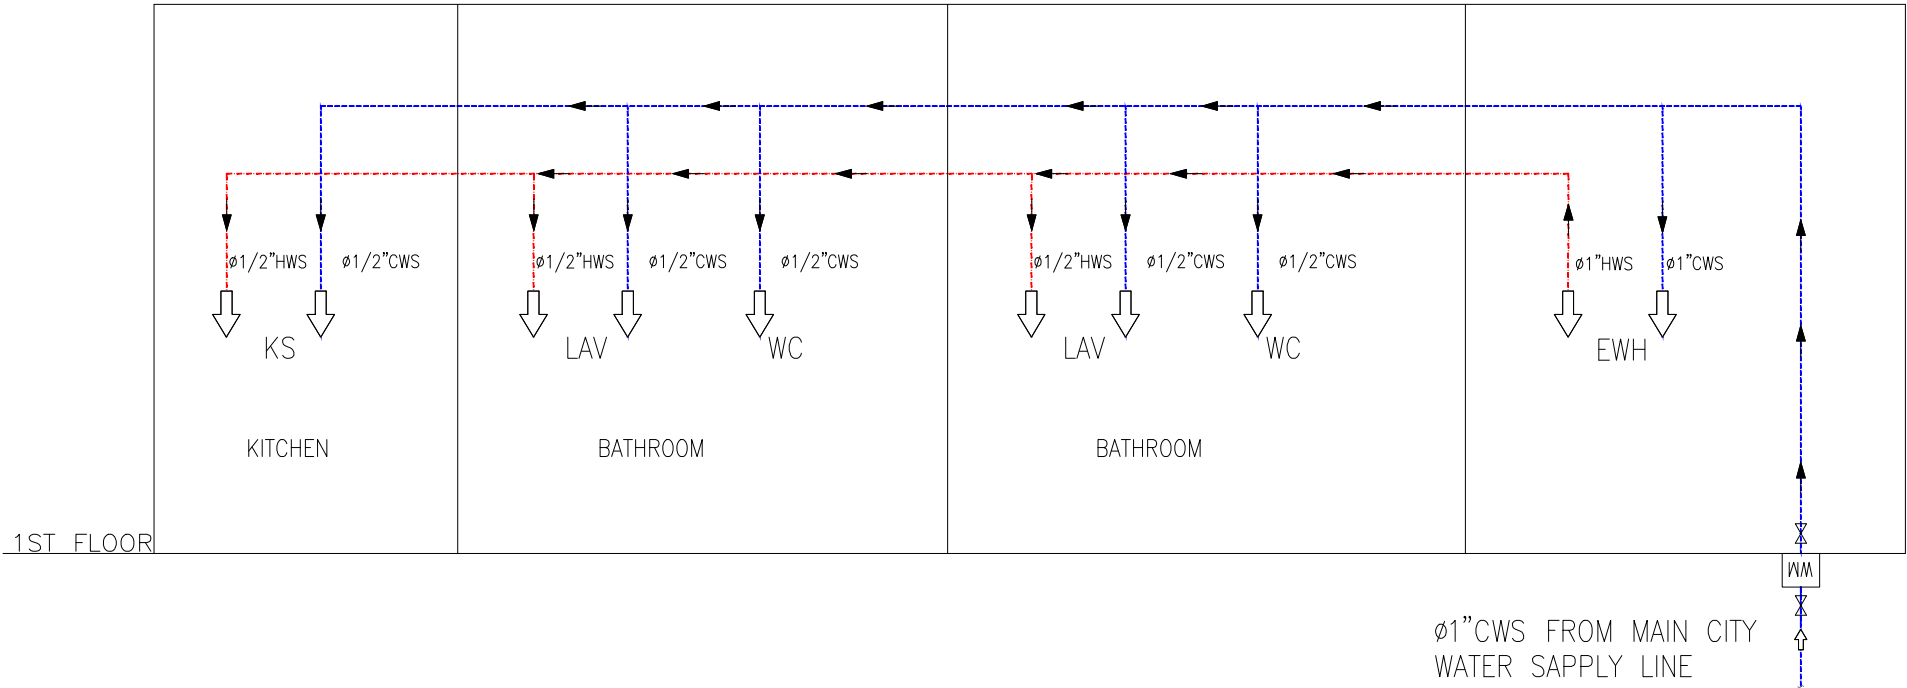

PL 03 WATER SUPPLY SYSTEM RISER DIAGRAM SCALE NTS

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	24-08-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

150 W. MAIN ST CIRCLEVILLE OHIO 43113

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL:TS9DESIGNS@GMAIL.COM










DRAWING STATUS:
RESTAURANT

DISCIPLINE:
PLUMBING

PROJECT TITLE:
HOME DESIGN

DRAWING TITLE:
RISER DIAGRAM

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 24 AUG. 2023
JOB NO 632-009	SHT NO PL-03	SCALE: NTS @A3

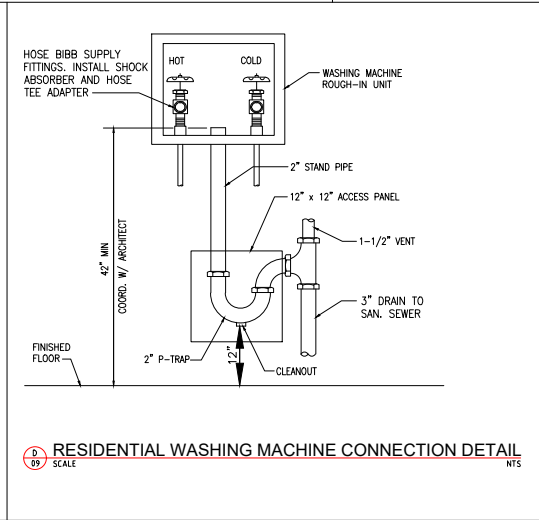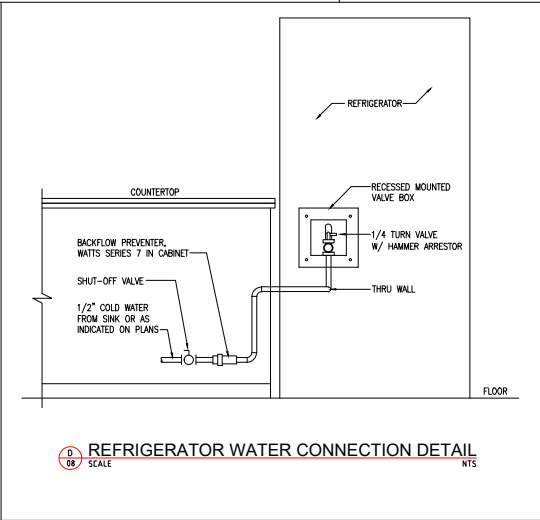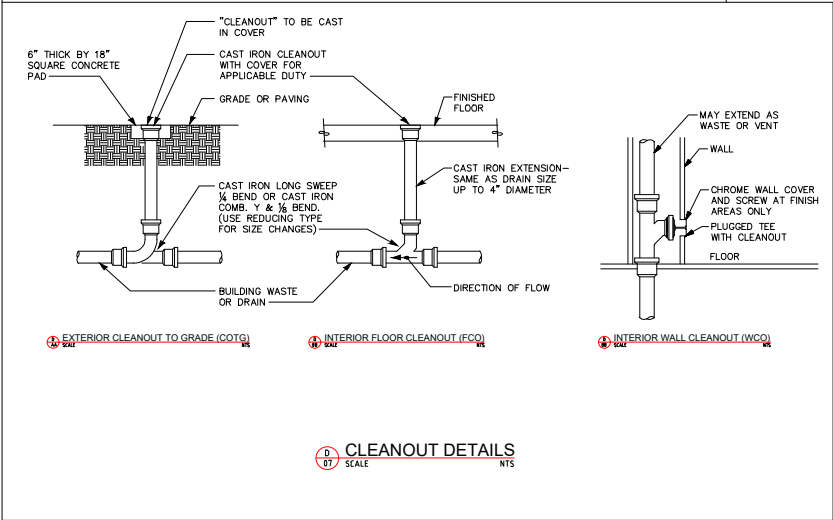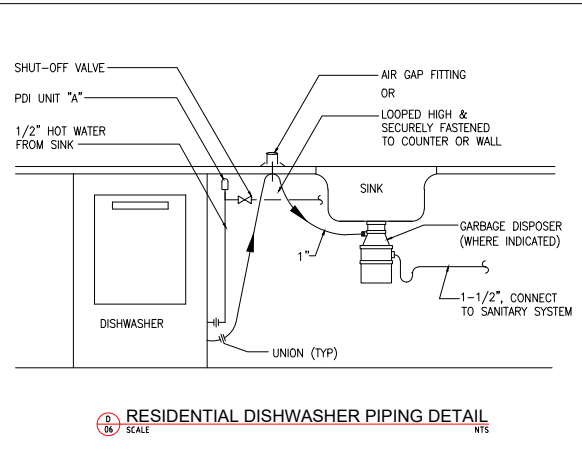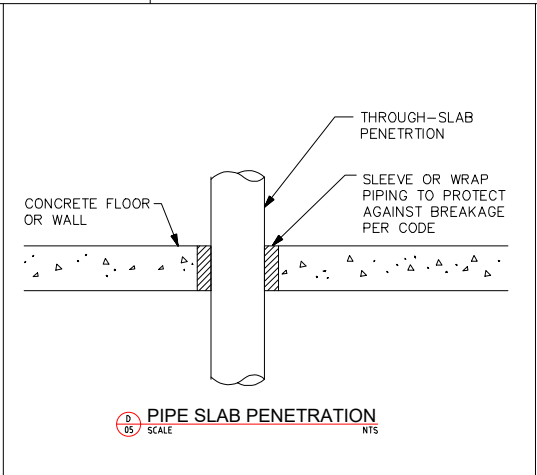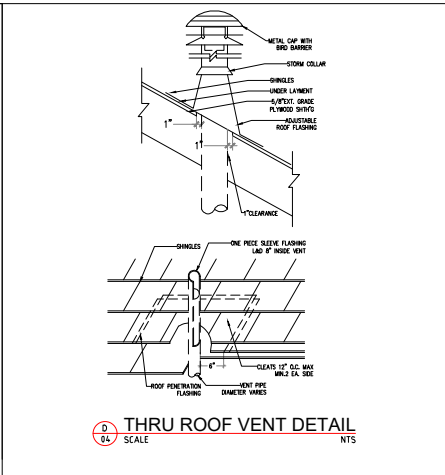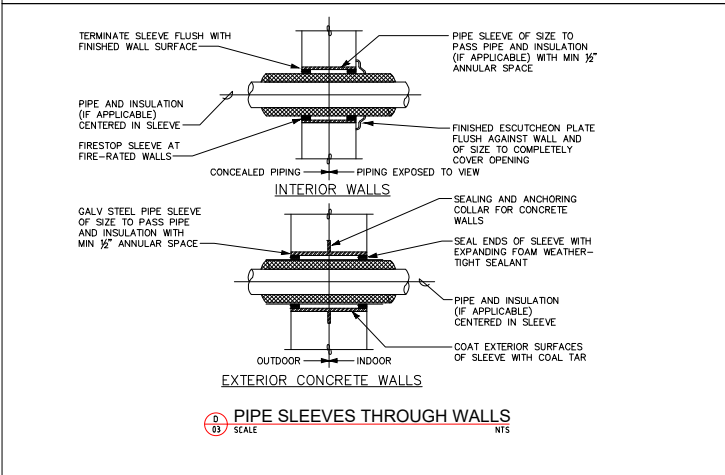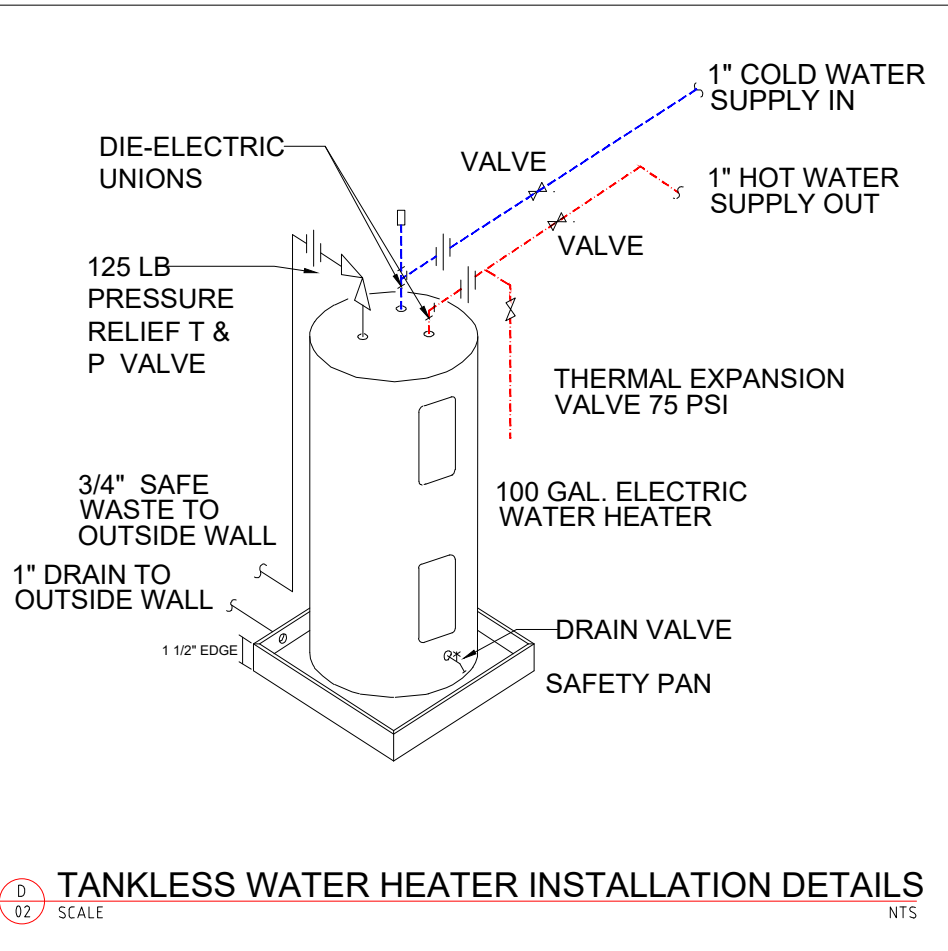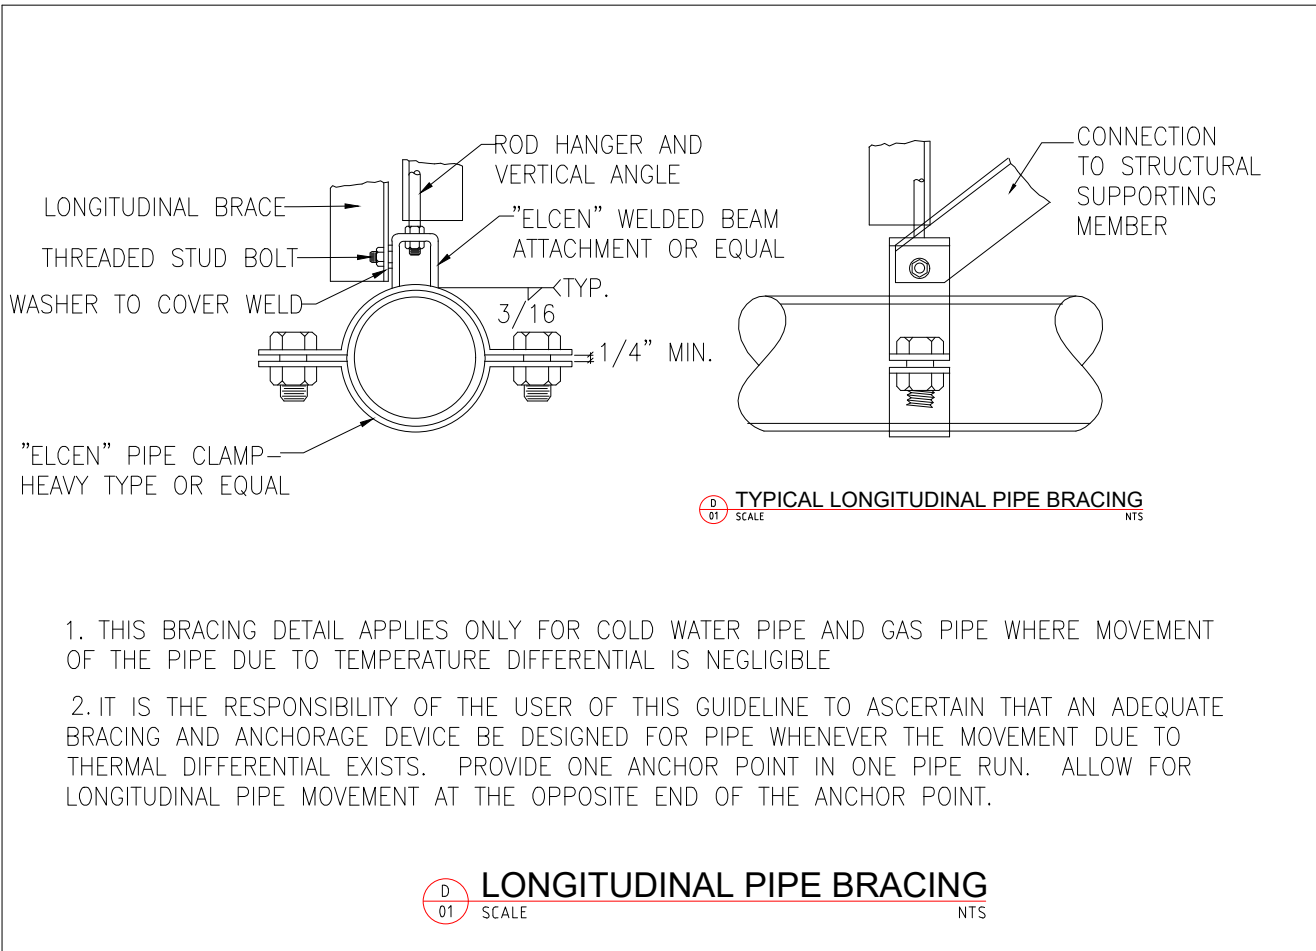

OWNER SIGNATURE			
REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	24-08-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			
CLIENT/CONSULTANT APPROVAL STATUS			
APPROVED		(A)	
APPROVED WITH NOTES		(B)	
RESUBMIT		(C)	
DISAPPROVED		(D)	
OWNER:			
ADDRESS:			
150 W. MAIN ST CIRCLEVILLE OHIO 43113			
DESIGN CONSULTANT:			
TSABA CORP			
NADIF BRACEY			
254 CHAPMAN RD, STE 208 #13130			
NEWARK, DELAWARE 19702			
EMAIL:TS9DESIGNS@GMAIL.COM			
DRAWING STATUS:			
RESTAURANT			
DISCIPLINE:			
PLUMBING			
PROJECT TITLE:			
HOME DESIGN			
DRAWING TITLE:			
DETAILS			
DRAWN BY:		CHECKED BY:	DATE:
A.S		N.B	24 AUG. 2023
JOB NO		SHT NO	SCALE:
632-009		PL-04	NTS @A3