

RENOVATION

5207 J ST SACRAMENTO, CA 95819



GENERAL NOTES:

- 1. GENERAL NOTES APPLY TO ALL DRAWINGS
- 2. DO NOT SCALE DRAWINGS. ANY DIMENSIONAL INFORMATION REQUIRED WHICH IS NOT INDICATED ON DRAWING DIMENSION STRINGS SHALL BE OBTAINED FROM THE ARCHITECT.
- 3. DIMENSIONS SHOWN ARE FINISH SURFACE OF EXISTING CONSTRUCTION, UNLESS NOTED OTHERWISE .
- 4. CONTRACTOR SHALL VERIFY ALL EXISTING DIMENSIONS AND CONDITIONS (I.E EXISTING MATERIALS, FRAMING MEMBER SIZES AND LOCATIONS, METHODS OF CONSTRUCTION). IF DISCREPANCIES ARE FOUND, NOTIFY ARCHITECT BEFORE PROCEEDING WITH WORK.
- 5. CONTRACTOR SHALL MAINTAIN THE IMMEDIATE CONSTRUCTION SITE IN A SECURE, CLEAN AND SAFE MANNER.
- 6. PROTECTION : CONTRACTORS SHALL BE SOLELY RESPONSIBLE FOR TAKING ALL STEPS NECESSARY TO PROTECT THE PUBLIC FROM INJURY AND ADJACENT PROPERTY DAMAGES DURING CONSTRUCTION AS REQUIRED BY LOCAL CODES.

PROJECT:RENOVATION

ADDRESS:5207 J ST SACRAMENTO, CA 95819

APPLICABLE CODES:

- 1. 2022 CA Building Code with local amendments.
- 2. 2022 CA Existing Building Code.
- 3. 2022 CA Energy Conservation Code.
- 4. 2022 ANSI A-117.1 Accessible & Useable Building & facilities.
- 5. 2022 CA Plumbing Code with local amendments.
- 6. 2022 CA Mechanical Code with local amendments.
- 7. 2022 CA Fuel Gas Code with local amendments.
- 8. 2022 CA Electric Code.
- 9. 2022 CA Fire Code with local amendments.

INDEX TO DRAWINGS

SHEET NUMBER	SHEET NAME	SHEET NUMBER	SHEET NAME
ELECTRICAL		MECHANICAL	
EL-00	COVER SHEET	ME-01	NOTES
EL-01	NOTES	ME-02	FIRST FLOOR HVAC PLAN
EL-02	FIRST FLOOR LIGHTING PLAN	ME-03	SECOND FLOOR HVAC PLAN
EL-03	SECOND FLOOR LIGHTING PLAN	ME-04	DETAILS
EL-04	FIRST FLOOR POWER PLAN		
EL-05	SECOND FLOOR POWER PLAN		
EL-06	PANEL SCHEDULE & SINGLE LINE DIAGRAM		
PLUMBING			
PL-01	NOTES		
PL-02	FIRST FLOOR DRAINAGE PLAN		
PL-03	SECOND FLOOR DRAINAGE PLAN		
PL-04	FIRST FLOOR WATER SUPPLY PLAN		
PL-05	SECOND FLOOR WATER SUPPLY PLAN		
PL-06	RISER DIAGRAM		
PL-07	DETAILS		

SCOPE OF WORK:

- 1. ELECTRICAL
- 2. PLUMBING
- 3. MECHANICAL

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	⚠	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
ELECTRICAL

PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
COVER SHEET

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO EL-00	SCALE: NTS

BASIC ELECTRICAL REQUIREMENTS:

1. GENERAL: ALL ELECTRICAL WORK SHALL CONFORM TO THE REQUIREMENTS OF THE 2022 CEC ELECTRICAL CODE AND NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA) STANDARDS UNLESS MORE STRINGENT REQUIREMENTS ARE INDICATED. ALL ELECTRICAL WORK SHALL COMPLY WITH ADA RECOMMENDATIONS. ALL ELECTRICAL WORK SHALL BE PERFORMED IN A NEAT AND WORKMAN LIKE MANNER BY A LICENSED ELECTRICIAN, OR A CERTIFIED APPRENTICE WORKING UNDER THE DIRECT SUPERVISION OF A LICENSED ELECTRICIAN, USING THE BEST METHODS KNOWN TO THE TRADE AND SHALL PRESENT A NEAT AND PROFESSIONAL APPEARANCE WHEN COMPLETED. THE OWNER RESERVES THE RIGHT TO CHANGE, WITHOUT ADDITIONAL COST, THE LOCATION OF ANY APPARATUS OR OUTLET, PROVIDED SUCH CHANGE DOES NOT ADD MORE THAN 10 FT TO THE FEEDER AND IS ORDERED BEFORE INSTALLATION OF THE AFFECTED PORTION OF THE WORK IS COMMENCED. CONTRACTOR SHALL BRING ALL CONFLICTS ON THE DRAWINGS TO THE OWNERS ATTENTION FOR HIS RESOLUTION PRIOR TO PERFORMING THAT WORK.

2. THE CONTRACTOR SHALL SURVEY THE PROJECT SITE PRIOR TO THE BID TO ASSESS ACTUAL FIELD CONDITIONS, FAILURE TO PERFORM THIS INSPECTION BINDS THE CONTRACTOR TO PERFORM THE WORK WITHOUT EXTRA CHARGES DESPITE THE IGNORANCE OF REASONABLY ANTICIPATED CONDITIONS.

3. ROUGH-IN'S: THE CONTRACTOR SHALL VERIFY AND COORDINATE THE ROUGH-IN REQUIREMENTS OF EACH ITEM OF EQUIPMENT WITH THE CONTRACTOR SUPPLYING THE EQUIPMENT.

4. INSTALLATION: THE ELECTRICAL DRAWINGS INDICATE THE EXTENT AND GENERAL LOCATION AND ARRANGEMENT OF EQUIPMENT AND MATERIALS. THE CONTRACTOR SHALL BECOME FAMILIAR WITH ALL DETAILS OF THE WORK AND VERIFY ALL DIMENSIONS IN THE FIELD SO THAT EQUIPMENTS AND MATERIALS WILL BE PROPERLY LOCATED AND READILY ACCESSIBLE. THE CONTRACTOR SHALL SEQUENCE, COORDINATE, AND INTEGRATE THE VARIOUS ELEMENTS OF ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS. COMPLY WITH THE FOLLOWING REQUIREMENTS:

VERIFY ALL DIMENSIONS BY FIELD MEASUREMENTS.

COORDINATE ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS INSTALLATION WITH OTHER BUILDING COMPONENTS AND TRADES.

ARRANGE FOR CHASES, SLOTS, AND OPENINGS IN OTHER BUILDING COMPONENTS DURING PROGRESS OF CONSTRUCTION, TO ALLOW FOR INSTALLATION OF ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS.

SEQUENCE, COORDINATE, AND INTEGRATE INSTALLATION OF ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS FOR EFFICIENT FLOW OF THE WORK.

WHERE MOUNTING HEIGHTS ARE NOT INDICATED, INSTALL ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS TO PROVIDE MAXIMUM HEADROOM POSSIBLE.

5. INSTALL ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS TO CONFORM WITH APPROVED SUBMITTAL DATA TO THE GREATEST EXTENT POSSIBLE. CONFORM TO THE ARRANGEMENTS INDICATED ON THE ELECTRICAL DRAWINGS, RECOGNIZING THAT PORTIONS OF THE WORK ARE SHOWN ONLY IN DIAGRAMMATIC FORM. WHERE COORDINATION REQUIREMENTS CONFLICT WITH INDIVIDUAL SYSTEM REQUIREMENTS, REFER CONFLICT TO THE ARCHITECT/ENGINEER OR OWNER'S REPRESENTATIVE FOR RESOLUTION.

6. IN GENERAL, INSTALL ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS LEVEL AND PLUMB, PARALLEL AND PERPENDICULAR TO BUILDING LINES AND/OR FEATURES AND/OR OTHER BUILDING SYSTEMS.

7. INSTALL ELECTRICAL EQUIPMENT TO FACILITATE SERVICING, MAINTENANCE, AND REPAIR OR REPLACEMENT OF EQUIPMENT AND COMPONENT PARTS. AS MUCH AS PRACTICAL, CONNECT EQUIPMENT FOR EASE OF DISCONNECTING, WITH MINIMUM OF INTERFERENCE WITH OTHER INSTALLATIONS.

8. INSTALL ELECTRICAL SYSTEMS, EQUIPMENT, AND MATERIALS GIVING RIGHT-OF-WAY PRIORITY TO SYSTEMS REQUIRED TO BE INSTALLED AT A SPECIFIC SLOPE (INCL. SPRINKLER SYSTEMS).

9. CUTTING AND PATCHING: ALL ELECTRICAL WORK SHALL BE CAREFULLY LAID OUT IN ADVANCE, AND WHERE CUTTING, CHANNELING, CHASING, OR DRILLING OF FLOORS, WALLS, PARTITIONS, CEILINGS, OR OTHER SURFACES IS NECESSARY FOR THE PROPER INSTALLATION, SUPPORT, OR ANCHORAGE OF CONDUIT OR OTHER ELECTRICAL WORK, THIS WORK SHALL BE CAREFULLY DONE. ANY RESULTING DAMAGE TO THE BUILDING OR OTHER SYSTEMS, EQUIPMENT, OR MATERIALS SHALL BE REQUIRED BY SKILLED MECHANICS OF THE TRADES INVOLVED, AT NO ADDITIONAL COST TO THE OWNER.

10. PRODUCTS: SYSTEMS, EQUIPMENT, AND MATERIALS DESCRIBED ON THE ELECTRICAL DRAWINGS ESTABLISH THE MINIMUM STANDARDS FOR QUALITY AND STYLE AND SHALL BE THE BASIS OF THE BID. ALL SYSTEMS, EQUIPMENT, AND MATERIALS SHALL BE NEW AND SHALL BEAR THE UL LABEL OR BE UL LISTED, WHERE APPLICABLE, AND SHALL BE INSTALLED IN ACCORDANCE WITH THE NEC AND NEMA STANDARDS.
11. SUBSTITUTIONS: WHERE SYSTEMS, EQUIPMENT, OR MATERIALS ARE SPECIFIED BY MANUFACTURER OR BRAND NAME AND CATALOG NUMBER, SUCH SPECIFICATION SHALL ESTABLISH THE MINIMUM STANDARDS FOR QUALITY AND STYLE AND SHALL BE THE BASIS OF THE BID. SYSTEMS, EQUIPMENT, AND MATERIALS UNLESS SPECIALLY IDENTIFIED SHALL BE SUBSTITUTED ONLY WHEN THE SUBSTITUTION IS WRITTEN AGREEMENT. SHOULD THE CONTRACTOR PROPOSE TO FURNISH PRODUCTS OTHER THAN THOSE SPECIFIED, AS PERMITTED BY "OR APPROVED EQUAL" CLAUSES, HE SHALL SUBMIT A WRITTEN REQUEST FOR SAID SUBSTITUTIONS THROUGH APPROPRIATE CHANNELS TO THE ARCHITECT/ENGINEER FOR HIS REVIEW. SUCH REQUEST SHALL BE ACCOMPANIED WITH COMPLETE DESCRIPTIVE LITERATURE, INCLUDING, BUT NOT LIMITED TO, CATALOG CUT SHEETS, BROCHURES, CIRCULARS, SPECIFICATIONS, PERFORMANCE DATA, INSTALLATION INSTRUCTIONS, SHOP DRAWINGS, AND OTHER PRINTED INFORMATION IN SUFFICIENT DETAIL AND SCOPE TO VERIFY COMPLIANCE WITH THE REQUIREMENTS OF THE CONTRACT. DESCRIPTIVE LITERATURE ON PROPOSED SUBSTITUTIONS SHALL BE CLEAR, CONCISE, AND LOGICALLY ARRANGED. ALL DATA WHICH IS, AND IS NOT, APPLICABLE SHALL BE CLEARLY IDENTIFIED AS SUCH. IF REQUESTED, THE CONTRACTOR SHALL SUBMIT SAMPLES OF SPECIFIED ITEMS FOR INSPECTION. DESCRIPTIVE LITERATURE SHALL BE RETURNED WITHOUT REVIEW IF NOT PROPERLY PREPARED. THE FOLLOWING SYSTEMS, EQUIPMENT, AND MATERIALS, AS A MINIMUM, REQUIRE SUBMITTALS:

ANY PROPOSED SUBSTITUTIONS:

WIRING DEVICES.

PANELBOARDS.

DISCONNECT SWITCHES.

CIRCUIT BREAKERS.

LIGHTING FIXTURES INCLUDING BALLASTS.

12. SUBMITTALS: THE CONTRACTOR SHALL FOLLOW THE GENERAL PROVISIONS OF THE CONTRACT AND ESTABLISHED PROCEDURES. SUBMITTALS SHALL CONSIST OF COMPLETE DESCRIPTIVE LITERATURE INCLUDING, BUT NOT LIMITED TO, CATALOG CUT SHEETS, BROCHURES, CIRCULARS, SPECIFICATIONS, PERFORMANCE DATA, INSTALLATION INSTRUCTIONS, SHOP DRAWINGS, AND OTHER PRINTED INFORMATION IN SUFFICIENT DETAIL AND SCOPE TO VERIFY COMPLIANCE WITH THE REQUIREMENTS OF THE CONTRACT. DESCRIPTIVE LITERATURE SHALL BE CLEAR, CONCISE, AND LOGICALLY ARRANGED. ALL DATA WHICH IS, AND IS NOT, APPLICABLE SHALL BE CLEARLY IDENTIFIED AS SUCH. IF REQUESTED, THE CONTRACTOR SHALL SUBMIT SAMPLES OF SPECIFIED ITEMS FOR INSPECTION. DESCRIPTIVE LITERATURE SHALL BE RETURNED WITHOUT REVIEW IF NOT PROPERLY PREPARED. THE FOLLOWING SYSTEMS, EQUIPMENT, AND MATERIALS, AS A MINIMUM, REQUIRE SUBMITTALS:

ANY PROPOSED SUBSTITUTIONS:

WIRING DEVICES.

PANELBOARDS.

DISCONNECT SWITCHES.

CIRCUIT BREAKERS.

LIGHTING FIXTURES INCLUDING BALLASTS.

13. RECORD DRAWINGS: THE CONTRACTOR SHALL MAINTAIN AT THE SITE A CLEAN, UNDAMAGED SET OF BLUE- OR BLACK-LINE WHITE PRINTS OF CONTRACT DRAWINGS. THIS RECORD SET OF CONTRACT DRAWINGS SHALL BE MARKED TO SHOW THE ACTUAL INSTALLATION AND WHERE THE ACTUAL MATERIALS AND EQUIPMENT DIFFER FROM THE CONTRACT DRAWINGS. THE CONTRACTOR SHALL MAINTAIN VARIOUS SUBSTANTIALLY FROM THE ELECTRICAL WORK AS ORIGINALLY SHOWN. MARK WHICHEVER DRAWINGS ARE MOST CAPABLE OF SHOWING CONDITIONS FULLY AND ACCURATELY. GIVE PARTICULAR ATTENTION TO CONCEALED ELEMENTS THAT WOULD BE DIFFICULT TO MEASURE AND RECORD AT A LATER DATE. MARK RECORD DRAWINGS WITH A RED ERASABLE PENCIL. USE OTHER COLORS TO DISTINGUISH BETWEEN VARIATIONS IN SEPARATE CATEGORIES OF THE ELECTRICAL WORK. NOTE CONTRACT MODIFICATIONS AND APPROVED SUBSTITUTIONS WHERE APPLICABLE.

14. PROTECTION OF INSTALLED SYSTEMS, EQUIPMENT, AND MATERIALS: PROTECT INSTALLED SYSTEMS, EQUIPMENT, AND MATERIALS FROM DAMAGE UNTIL FINAL ACCEPTANCE BY THE OWNER. REPAIR OR REPLACE, AT NO ADDITIONAL COST TO THE OWNER, DAMAGED SYSTEMS, EQUIPMENT, AND MATERIALS TO THE SATISFACTION OF THE ARCHITECT/ ENGINEER AND/ OR OWNER.

15. CLEANING: UPON COMPLETION OF INSTALLATION, INSPECT INTERIOR AND EXTERIOR OF ALL ELECTRICAL EQUIPMENT. REMOVE PAINT SPATTERS AND OTHER SPOTS, DIRT, AND DEBRIS. TOUCH-UP SCRATCHES AND MARKS OF FINISH TO MATCH ORIGINAL FINISH.

16. CERTIFICATIONS: THE FOLLOWING SHALL BE OBTAINED AND SUBMITTED TO THE OWNER PRIOR TO FINAL PAYMENT:

ELECTRICAL SYSTEMS: A CERTIFICATE OF FINAL INSPECTION AND APPROVAL BY THE AUTHORITIES HAVING JURISDICTION

17. GUARANTEE: THE CONTRACTOR SHALL SUBMIT A WRITTEN GUARANTEE TO THE OWNER, PRIOR TO FINAL PAYMENT, THAT WARRANTS THE INSTALLATION SHALL REMAIN FREE OF DEFECTS FOR PERIOD OF ONE YEAR AFTER FINAL ACCEPTANCE BY THE OWNER. THE GUARANTEE SHALL STATE THAT THE OWNER IS NOT LIABLE FOR PARTS AND LABOR COSTS INCURRED BY THE CONTRACTOR IN THE REPAIR OF ACTUAL PRODUCT OR INSTALLATION DEFECTS. THE GUARANTEE SHALL STATE THAT THE ON-SITE RESPONSE TIME TO REQUESTS FOR ASSISTANCE WILL BE 24 HOURS FOR NON-EMERGENCY CONDITIONS AND 2 HOURS FOR EMERGENCY CONDITIONS.

ELECTRICAL MATERIALS:

1. RACEWAYS:

A. RIGID GALVANIZED STEEL (RGS) CONDUIT: ANSI C80.1.

B. ELECTRICAL METALIC TUBING (EMT) AND FITTINGS: ANSI C80.3 WITH COMPRESSION TYPE FITTINGS.

C. LIQUIDTIGHT FLEXIBLE METAL CONDUIT: UL 360. FLEXIBLE STEEL CONDUIT WITH PVC JACKET.

D. NONMETALLIC CONDUIT AND TUBING (ENT): NEMA TC 13

2. BOXES:

A. SHEET METAL: NEMA OS 1.

B. CAST METAL: NEMA FB 1, TYPE FD, CAST FRAILLY BOX WITH CASKETED COVER.

C. HINGED COVER ENCLOSURES: NEMA 250, GALVANIZED STEEL ENCLOSURE WITH CONTINUOUS HINGE COVER, QUICK RELEASE TYPE LATCHES, REMOVABLE INTERIOR PANEL, AND MANUFACTURER'S STANDARD GRAY ENAMEL INSIDE AND OUT.

3. WIRES AND CABLES:

A. CONDUCTOR MATERIAL: ANNEALED COPPER.

B. INSULATION: THHN/THWN CONFORMING TO WC 5.

C. CONDUCTORS #10 AWG AND SMALLER SHALL BE SOLID; CONDUCTORS #14 AWG AND LARGER SHALL BE STRANDED. MC CABLE IS PERMITTED FOR BRANCH CIRCUITY, AND SHALL UTILIZE SOLID CONDUCTORS.

D. GROUND CONDUCTORS #10 AWG AND SMALLER SHALL HAVE GREEN THHN/THWN INSULATION.

4. WIRING DEVICES:

A. GENERAL: COMPLY WITH NEMA WD 1, "GENERAL PURPOSE WIRING DEVICES."

B. COLOR: WHITE, BLACK, GRAY, IVORY, OR BROWN TO BE AS SELECTED BY THE ARCHITECT/ENGINEER AND/OR THE OWNER.

C. RECEPTACLES: COMPLY WITH UL 498, "ELECTRICAL ATTACHMENT PLUGS AND RECEPTACLES." "HEAVY DUTY SPECIFICATION GRADE EXCEPT AS OTHERWISE INDICATED. GROUND FAULT CIRCUIT INTERRUPTER (GFCI) TYPE RECEPTACLES SHALL COMPLY WITH UL 943, "GROUND FAULT CIRCUIT INTERRUPTER (GFCI) WITH INTEGRAL NEMA 5-20P RECEPTACLE DESIGNED FOR INSTALLATION IN A 2-3/4" DEEP DEVICE BOX WITHOUT ADAPTER. TOGGLE SWITCHES: 20A, 120-277V AC, QUIET TYPE, SPECIFICATION GRADE AND SHALL COMPLY WITH UL 20, "GENERAL USE SNAP SWITCHES." SINGLE-POLE, TWO-POLE, THREE-WAY, AND FOUR-WAY AS INDICATED AND/OR REQUIRED.

E. DEVICE PLATES: SINGLE AND COMBINATION TYPES WHICH MATE AND MATCH WITH CORRESPONDING WIRING DEVICES.

F. MANUFACTURER: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS AS MANUFACTURED BY HUBBEL INC. OR APPROVED EQUAL BY LEVITON.

5. GROUNDING:

A. GROUNDINGS AND BONDING PRODUCTS: OF TYPES INDICATED AND/OR OF SIZES AND RATINGS TO COMPLY WITH THE NEC, WHERE TYPES, SIZES, RATINGS, AND QUANTITIES ARE IN EXCESS OF NEC REQUIREMENTS, THE MORE STRINGENT REQUIREMENTS AND THE GREATER SIZE, RATING, AND QUANTITY INDICATIONS SHALL GOVERN. COVER SMOOTH MATCHING NYLON IN ALL AREAS.

B. CONDUCTOR MATERIAL: COPPER.

C. WIRE AND CABLE CONDUCTORS: CONFORM TO NEC TABLE 8, EXCEPT AS OTHERWISE INDICATED. FOR CONDUCTOR PROPERTIES, INCLUDING STRANDING.

D. CONNECTOR PRODUCTS: UL LISTED AND LABELED AS GROUNDING CONNECTORS FOR THE MATERIALS USED.

6. PANELBOARDS:

A. CIRCUIT BREAKERS: PROVIDE TYPE, RATING, AND FEATURES INDICATED. BOLT-ON EXCEPT WHERE PLUG-IN FOR USE ON EXISTING PANELBOARDS (NOT BEING UPGRADED) TANDEM CIRCUIT BREAKERS SHALL NOT BE USED. MULTIPLE CIRCUIT BREAKERS SHALL HAVE AN INTERNAL COMMON TRIP AND A SINGLE HANDLE.

B. ENCLOSURES: NEMA TYPE 1, UNLESS OTHERWISE INDICATED.

C. FRONT: SECURED TO BOX WITH CONCEALED TRIM CLAMPS EXCEPT AS INDICATED. FRONT FOR SURFACE MOUNTED PANELBOARDS SHALL BE SAME DIMENSIONS AS BOX.

D. DIRECTORY FRAME: METAL WITH CLEAR PLASTIC COVER MOUNTED ON INSIDE OF PANELBOARD DOOR.

E. BUS WORK: HARD DRAWN COPPER OF 98% CONDUCTIVITY.

F. MAIN AND NEUTRAL PLUGS: COMPRESSION TYPE.

G. EQUIPMENT GROUND BUS: ADEQUATE FOR FEEDER AND BRANCH CIRCUIT EQUIPMENT GROUND CONDUCTORS, BONDED TO BOX.

H. PROVISIONS FOR FUTURE DEVICES: EQUIP WITH MOUNTING BREAKETS, BUS CONNECTION, AND NECESSARY APPURTENANCES, FOR THE CIRCUIT BREAKER AMPERE RATING INDICATED FOR FUTURE INSTALLATION OF DEVICES.

I. MAIN AND SUFFERED LUGS: PROVIDE WHERE INDICATED.

J. NAMEPLATE: CUSTOM ENGRAVED PLASTIC LAMINATE, WHITE LETTERS ON BLACK FIELD, FOR EACH PANELBOARD MOUNTED WITH EPOXY OR INDUSTRIAL CEMENT OR ADHESIVE.

K. MANUFACTURER: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS AS MANUFACTURED BY SQUARE-D, SIEMENS OR CUTLER HAMMER CO.

7. DISCONNECTS AND CIRCUIT BREAKERS:

A. FUSIBLE SWITCH, 800A AND SMALLER: NEMA KS 1, TYPE HD, CLIPS TO ACCOMMODATE SPECIFIED FUSES, ENCLOSURE SUITABLE FOR THE ENVIRONMENT WHERE INSTALLED, HANDLE LOCKABLE WITH TWO (2) PAD LOCKS, AND INTERLOCKED WITH COVER IN "CLOSED" POSITION. ENCLOSURES SHALL COMPLY WITH NEMA KS 1, TYPE 1, INDOOR DRY LOCATIONS.

B. MOLDED CASE CIRCUIT BREAKER: NEWMAN AB 1, HANDLE LOCKABLE WITH TWO (2) PADLOCKS. FRAME SIZE, TRIP RATING NUMBER OF POLES, AND AUXILIARY DEVICES AS INDICATED. ENCLOSURES SHALL COMPLY WITH NEWMAN AB 1, TYPE 1, INDOOR DRY LOCATIONS. CIRCUIT BREAKERS SHALL HAVE A MINIMUM INTERRUPTING CAPACITY AS FOLLOWS:

MANUFACTURER: SUBJECT TO COMPLIANCE WITH REQUIREMENTS, PROVIDE PRODUCTS AS SUITABLE FOR INSTALLATION IN EXISTING PANELS. DISCONNECTS SHALL BE BY SQUARE-D.

STANDARD MOUNTING HEIGHTS (UNLESS OTHERWISE NOTED)

MOUNTING HEIGHT NOTES:

1. STANDARD MOUNTING HEIGHTS: (COORDINATE WITH ARCH DRAWINGS) ALL MOUNTING HEIGHTS SHALL BE AS INDICATED BY ARCHITECT. IF NOT INDICATED BY ARCHITECT THEN PROVIDE AS NOTED ABOVE.

2. MOUNTING HEIGHTS TO CENTER OF OUTLETS UNLESS OTHERWISE NOTED. IN MASONRY CONSTRUCTION THE ABOVE MOUNTING HEIGHTS SHALL BE USED FOR REFERENCE TO NEAREST BLOCK OR BRICK COURSING.

3. THE ABOVE MOUNTING HEIGHT SHALL BE ADHERED TO UNLESS SPECIFICALLY NOTED OR DETAILED OTHERWISE ON THE DRAWING OR SPECIFICATIONS.

4. INDICATION (+) NEXT TO A DEVICE INDICATES THAT DEVICE IS MOUNTED ABOVE A COUNTER OR CASEWORK. COORDINATE WITH ARCHITECTURAL DETAIL AND CASEWORK CONTRACTOR.

5. 3'-6" FOR ADA COMPLIANT DEVICES VERIFY EXACT HEIGHT PRIOR TO ROUGH IN.

ELECTRICAL NOTES:

1. WIRING METHODS: WIRING SHALL CONSIST NO MORE (NON-METALLIC) OR CABLES AND WIRES INSTALLED IN RGS CONDUIT, EMT, LIQUIDTIGHT FLEXIBLE METAL CONDUIT AND MC CABLES. RACEWAYS SHALL BE CONCEALED WITHIN FINISHED WALLS AND CEILINGS UNLESS OTHERWISE INDICATED. OTHER THAN ROOF PENETRATIONS REQUIRED TO FEED 3 FT OF MOUNTED EQUIPMENT, RACEWAYS WILL NOT BE ROUTED EXPOSED OUTSIDE OF THE BUILDING.

2. RACEWAYS: RACEWAYS SHALL BE PROVIDED WHERE INDICATED AND REQUIRED AND SHALL BE INSTALLED AS SPECIFIED BELOW, UNLESS OTHERWISE INDICATED. MINIMUM RACEWAY SIZE SHALL BE 3/4 IN. RGS CONDUIT SHALL BE USED FOR ALL OUTDOOR INSTALLATIONS. EMT SHALL BE USED FOR ALL INDOOR INSTALLATIONS. LIQUIDTIGHT FLEXIBLE METAL CONDUIT, 6 FT MAXIMUM LENGTH, SHALL BE USED FOR ALL CONDUIT TERMINATIONS AT EQUIPMENT SUBJECT TO VIBRATION, BUSHINGS, MANUFACTURED FITTINGS, OR BOXES PROVIDING EQUIVALENT MEANS OF PROTECTION SHALL BE INSTALLED ON THE ENDS OF ALL CONDUITS AND SHALL BE OF THE INSULATING TYPE WHERE REQUIRED BY THE N.E.C. ONLY LISTED ADAPTERS SHALL BE USED TO CONNECT EMT TO RGS CONDUIT AND CAST METAL BOXES AND CONDUIT BODIES. PENETRATIONS OF SLABS AND FIRE RATED WALLS SHALL BE FIRESTONE. KEEP RACEWAYS AT LEAST 6 IN. AWAY FROM PARALLEL RUNS OF FLUES AND STEAM OR HOT WATER PIPING. INSTALL HORIZONTAL RACEWAY RUNS HIGHER THAN WATER AND STEAM PIPING. RACEWAYS CROSSING STRUCTURAL EXPANSION JOINT SHALL BE PROVIDED WITH SUITABLE EXPANSION FITTINGS OR OTHER SUITABLE MEANS TO COMPENSATE FOR THE BUILDING EXPANSION AND CONTRACTION. RACEWAYS SHALL BE INSTALLED PARALLEL OR PERPENDICULAR TO WALLS, STRUCTURAL MEMBERS AND FEATURES, MECHANICAL DUCT AND PIPING SYSTEMS, OR INTERSECTIONS OF VERTICAL PLANES AND CEILINGS. CHANGES IN DIRECTION OF RUNS SHALL BE ACCOMPLISHED WITH SYMMETRICAL BENDS OR CAST METAL FITTINGS. FILED-MADE ELBOWS AND OFFSETS SHALL BE MADE WITH AN APPROVED HICKEY OR CONDUIT BENDING MACHINE. CRUSHED OR DEFORMED RACEWAY SHALL NOT BE INSTALLED. CARE SHALL BE TAKEN TO PREVENT THE LOOSENESS OF DIRT, AND CONSTRUCTION MATERIALS AND DEBRIS IN RACEWAYS DURING THE COURSE OF CONSTRUCTION. CLOGGED RACEWAYS SHALL BE ENTIRELY FREED OF OBSTRUCTIONS OR SHALL BE REPLACED.

3. RGS CONDUIT AND EMT SHALL BE SECURELY AND RIGIDLY FASTENED IN PLACE AT INTERVALS OF NOT MORE THAN 10 FT. FITTINGS AND BOXES WITH APPROVED PIPE STRAPS, WALL BRACKETS, CONDUIT CLAMPS, CONDUIT HANGERS, THREADED C-CLAMPS, OR CEILING TRAPEZE C-CLAMPS OR BEAM CLAMPS SHALL HAVE STRAP OR ROD TYPE RETAINERS. LOADS AN SUPPORTS SHALL BE COORDINATED WITH SUPPORTING STRUCTURES TO PREVENT DEFORMATION OR DAMAGE TO STRUCTURES. NO LOAD SHALL BE APPLIED TO JOIST BRIDGING. FASTENINGS SHALL BE BY WOOD SCREWS OR SCREW TYPE NAILS TO WOOD; BY TOGGLE BOLTS ON HOLLOW CMU; BY EXPANSION BOLTS ON CONCRETE OR BRICK; AND BY MACHINE SCREWS, WELDED THREADED STUDS, HEAT TREATED OR SPRING STEEL TENSION CLAMPS ON STEEL WORK. NAIL TYPE NYLON ANCHORS OR THREADED STUDS DRIVEN IN BY POWDER CHARGE AND PROVIDED WITH LOCK WASHERS AND NUTS MAY BE USED IN LIEU OF EXPANSION BOLTS OR MACHINE SCREWS. RACEWAYS OR PIPE STRAPS SHALL NOT BE WELDED TO STEEL STRUCTURES. IN PARTITIONS OF LIGHT STEEL CONSTRUCTION, SHEET METAL SCREWS MAY BE USED. CONDUIT SHALL NOT BE SUPPORTED USING WIRE OR NYLON TIES. RACEWAYS SHALL BE INSTALLED AS A COMPLETE SYSTEM AND BE INDEPENDENTLY SUPPORTED FROM THE STRUCTURE. UPPER RACEWAYS SHALL NOT BE THE SUPPORT OF LOWER RACEWAYS. SUPPORTING MAINS WILL NOT BE SHARED BETWEEN ELECTRICAL RACEWAYS AND MECHANICAL DUCTS OR PIPING. MOUNTING HARDWARE SHALL NOT PRESENT SHARP EDGES WHERE PERSONNEL CONTACT IS POSSIBLE. IN MECHANICAL SPACES, "MINERALS" SUPPORT SHALL NOT BE USED BELOW 10' A.F.F.

4. BOXES: BOXES SHALL BE PROVIDED IN RACEWAY SYSTEMS WHEREVER REQUIRED FOR PULLING OF WIRES, MAKING CONNECTIONS, AND MOUNTING OF DEVICES OR LIGHTING FIXTURES. IN GENERAL, BOXES SHALL BE CONSTRUCTED OF HOT-DIPPED GALVANIZED FINISHED SHEET STEEL. BOXES FOR METALLIC RACEWAYS, 4 IN. BY 4 IN. NOMINAL SIZE AND SMALLER, SHALL BE OF THE CAST METAL HUB TYPE AND CASKETED WHEN LOCATED OUTSIDE OF THE BUILDING. BOXES SHALL BE LISTED AS SUITABLE FOR THE ENVIRONMENTAL CONDITIONS OF THE LOCATION THEY ARE INSTALLED. BOXES FOR MOUNTING OF LIGHTING FIXTURES SHALL BE NOT LESS THAN 4 IN. SQUARE EXCEPT SMALLER BOXES SHALL BE INSTALLED WHERE REQUIRED BY FIXTURE CONFIGURATION, UNLESS OTHERWISE INDICATED. DEVICE BOXES FOR RECEPTACLES SHALL BE MOUNTED WITH THE CENTER OF THE DEVICE BOX APPROXIMATELY 18 IN. AFF. INDICATED, DEVICE BOXES FOR TOGGLE SWITCHES SHALL BE MOUNTED WITH THE CENTER OF THE DEVICE BOX APPROXIMATELY 48 IN. AFF. BOXES AND BOX SUPPORTS SHALL BE FASTENED TO WOOD WITH WOOD SCREWS OR SCREW TYPE NAILS OF EQUAL HOLDING STRENGTH, WITH BOLTS AND METAL EXPANSION SHIELDS ON CONCRETE AND BRICK, WITH TOGGLE BOLTS ON HOLLOW CMU, AND WITH MACHINE SCREWS OR WELDED STUDS ON STEEL WORK. THREADED STUDS DRIVEN IN BY POWDER CHARGE AND PROVIDED WITH LOCK WASHERS AND NUTS, OR NAIL TYPE NYLON ANCHORS MAY BE USED IN LIEU OF EXPANSION SHIELDS OR MACHINE SCREWS. HANGERS SHALL NOT BE FASTENED OR SUPPORTED FROM JOIST BRIDGING.

5. WIRES AND CABLES: EXAMINE RACEWAYS AND BUILDING FINISHES TO RECEIVE WIRES AND CABLES FOR COMPLIANCE WITH INSTALLATION TOLERANCES AND OTHER CONDITIONS. DO NOT PROCEED WITH INSTALLATION UNTIL UNSATISFACTORY CONDITIONS HAVE BEEN CORRECTED. PULL WIRES AND CABLES INTO RACEWAY SIMULTANEOUSLY WHERE MORE THAN ONE IS BEING INSTALLED IN THE SAME RACEWAY. USE PULLING COMPOUND OR LUBRICANT WHERE NECESSARY; COMPOUND USED MUST NOT DEGRADE CONDUCTORS OR INSULATION. USE PULLING MEANS, INCLUDING FISH TAPE, CABLE, ROPE, AND BASKET-WEAVE WIRE/CABLE GRIPS THAT WILL NOT DAMAGE WIRES/CABLES OR RACEWAY. INSTALL EXPOSED CABLE, PARALLEL AND PERPENDICULAR TO WALLS, STRUCTURAL MEMBERS AND FEATURES, MECHANICAL DUCT AND PIPING SYSTEMS, OR INTERSECTIONS OF VERTICAL PLANES AND CEILING. HORIZONTAL RUNS OF MC CABLE SHALL BE SUPPORTED ON 3 FT MAXIMUM CENTERS. VERTICAL RUNS OF MC CABLE SHALL BE SUPPORTED ON 8 FT MAXIMUM CENTERS. INDOOR DRY LOCATIONS. VERTICAL RUNS OF MC CABLE SHALL BE SUPPORTED ON 3 FT MAXIMUM CENTERS. THE NUMBER OF SPICES SHALL BE KEPT TO AN ABSOLUTE MINIMUM. WIRING AT EACH OUTLET SHALL BE INSTALLED WITH AT LEAST 8 IN. SLACK.

5. WIRING DEVICES: INSTALL WIRING DEVICES WHERE INDICATED IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION, INSTRUCTION, APPLICABLE REQUIREMENTS OF THE NEC, AND RECOGNIZED INDUSTRY PRACTICES. INSTALL WIRING DEVICES IN DEVICE BOXES WHICH ARE CLEAN AND FREE FROM DIRT AND CONSTRUCTION MATERIALS AND DEBRIS. INSTALL WIRING DEVICES AFTER WIRING WORK IS COMPLETE. INSTALL DEVICE PLATES AFTER PAINTING WORK IS COMPLETE. TIGHTEN CONNECTORS AND TERMINALS INCLUDING SCREWS AND BOLTS, IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED TORQUE-TIGHTENING VALUES. PRIOR TO ENERGIZING CIRCUITS, TEST WIRING FOR ELECTRICAL CONTINUITY AND SHORTS. ENSURE PROPER POLARITY OF CONNECTIONS IS MAINTAINED. SUBSEQUENT TO EMERGING, TEST WIRING DEVICES AND DEMONSTRATE COMPLIANCE WITH REQUIREMENTS.

6. GROUNDING: ELECTRICAL SYSTEMS AND EQUIPMENT, METALLIC RACEWAYS AND BOXES, CABLE SHIELDS, METALLIC CABLE SHEATHS AND ARMOR, AND OTHER NON-CURRENT CARRYING METALLIC PARTS OF EQUIPMENT SHALL BE GROUNDED IN CONFORMANCE WITH THE NEC. EQUIPMENT GROUND CONDUCTORS SHALL COMPLY WITH NEC ARTICLE 250 FOR SIZES AND QUANTITIES, EXCEPT WHERE LARGER SIZES AND/OR MORE CONDUCTORS ARE INDICATED. PROVIDE SEPARATE INSULATED GROUND CONDUCTOR IN ALL RACEWAYS, REGARDLESS OF RACEWAY TYPE. SEPARATELY DERIVED SYSTEMS AS DEFINED BY THE NEC SHALL BE GROUNDED IN CONFORMANCE WITH NEC ARTICLE 250 PARA. 26. TERMINATE EQUIPMENT GROUND WIRES FOR FEEDERS AND BRANCH CIRCUITS WITH PRESSURE-TYPE GROUND LUGS. WHERE METALLIC CONDUITS TERMINATE AT METALLIC HOUSINGS WITHOUT MECHANICAL AND ELECTRICAL CONNECTION TO HOUSING, TERMINATE EACH CONDUIT WITH A GROUNDING BUSHING. CONNECT GROUNDING BUSHINGS WITH A GROUND WIRE TO THE GROUND BUS IN THE HOUSING. BOND ELECTRICALLY NONCONTIGUOUS CONDUITS AT BOTH ENTRIES AND EXITS WITH GROUNDING BUSHINGS AND GROUND WIRES. TIGHTEN GROUNDING AND BONDING CONNECTORS AND TERMINALS, INCLUDING SCREWS AND BOLTS, IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED TORQUE-TIGHTENING VALUES.

7. PANELBOARDS: INSTALL PANELBOARDS AND ACCESSORY ITEMS IN ACCORDANCE WITH NEMA PB 1.1, "GENERAL PRACTICES FOR PROPER INSTALLATION, OPERATION, AND MAINTENANCE OF PANELBOARDS RATED 600 VOLTS OR LESS," AND MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. MOUNT PANELBOARDS PLUMB AND RIGID WITHOUT DISTORTION OF BOX AND WITH THE TOP OF THE TRIM AT 78 IN. AFF. UNLESS OTHERWISE INDICATED. PROVIDE ACCURATE CIRCUIT DIRECTORIES IN EACH PANELBOARD, REFLECTIVE OF FINAL CIRCUIT CONFIGURATION. PROVIDE FILLER PLATES IN ALL UNUSED SPACES. TRAIN WIRES IN PANELBOARDS GUTTERS NEATLY IN GROUPS, BUNDLE, AND WRAP WITH WIRE TIES. GROUND PANELBOARD IN CONFORMANCE WITH THE NEC. TIGHTEN ELECTRICAL CONNECTORS AND TERMINALS, INCLUDING GROUNDING CONNECTIONS, IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED TORQUE-TIGHTENING VALUES. PERFORM INSULATION RESISTANCE TESTS OF PANELBOARD BUSES, COMPONENTS, AND FEEDER AND BRANCH CIRCUIT WIRING; INSULATION RESISTANCE LESS THAN 100 MEGOHM IS UNACCEPTABLE.

8. DISCONNECTS AND CIRCUIT BREAKERS: PROVIDE DISCONNECTS AND CIRCUIT BREAKERS WHERE INDICATED ON THE ELECTRICAL DRAWINGS AND/OR WHERE REQUIRED BY THE NEC, WHETHER INDICATED ON THE ELECTRICAL DRAWINGS OR NOT. INSTALL DISCONNECTS AND CIRCUIT BREAKERS PLUMB AND LEVEL AND IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. UPON COMPLETION OF INSTALLATION OF DISCONNECTS AND CIRCUIT BREAKERS, ENERGIZE CIRCUITS AND DEMONSTRATE CAPABILITY AND COMPLIANCE WITH REQUIREMENTS. EXCEPT AS OTHERWISE INDICATED, DO NOT DEMONSTRATE DISCONNECTS AND CIRCUIT BREAKERS BY OPERATING THEM UNDER LOAD; HOWEVER, DEMONSTRATE DISCONNECT AND CIRCUIT BREAKERS OPERATION THROUGH SIX OPENING/CLOSING CYCLES WITH CIRCUIT UNLOADED. OPEN DISCONNECT AND CIRCUIT BREAKER ENCLOSURES FOR INSPECTION OF INTERIOR, MECHANICAL AND ELECTRICAL CONNECTIONS, FUSE INSTALLATION IF APPLICABLE, AND FOR VERIFICATION OF TYPE AND RATING OF FUSES INSTALLED IN APPLICABLE. CORRECT DEFICIENCIES THEN RETEST TO DEMONSTRATE COMPLIANCE WITH REQUIREMENTS. REMOVE AND REPLACE DEFECTIVE UNITS WITH NEW UNITS AND RETEST.

9. LIGHTING FIXTURES: INSTALL FIXTURES WHERE, AND AT HEIGHTS, INDICATED IN ACCORDANCE WITH FIXTURE MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS, REQUIREMENTS OF THE NEC, AND RECOGNIZED INDUSTRY PRACTICES. TIGHTEN ELECTRICAL CONNECTORS AND TERMINALS, INCLUDING GROUND CONNECTIONS, IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED TORQUE-TIGHTENING VALUES. RECESSED OR SEMI-RECESSED FIXTURES MAY BE SUPPORTED BY CEILING SUPPORT SYSTEM. INSTALL CEILING SUPPORT SYSTEM RODS OR WIRES AT A MINIMUM OF FOUR (4) RODS OR WIRES PER FIXTURE LOCATED NOT MORE THAN 6 IN. FROM FIXTURE CORNERS. FIXTURES WHICH ARE SMALLER THAN CEILING GRID SHALL BE CENTERED IN ACOUSTICAL CEILING PANEL AND SUPPORTED BY AT LEAST TWO (2) 3/4 IN. METAL CHANNELS SPANNING AND SECURED TO CEILING SYSTEM GRID TEES. FIXTURES WHICH LAY-IN CEILING GRID SYSTEM SHALL BE SECURED IN PLACE BY INSTALLATION OF CLIPS WHICH SECURELY FASTEN FIXTURE TO CEILING GRID TEES. SUPPORT SURFACE MOUNT FIXTURES GREATER THAN 2 FT IN LENGTH AT A POINT IN ADDITION TO THE OUTLET BOX FIXTURE STUD. UPON COMPLETION OF INSTALLATION AND JUST PRIOR TO DEMONSTRATION CLEAN AND RELAMP FIXTURES. LAMP FIXTURES WITH SPECIFIED LAMPS IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTRUCTIONS. UPON COMPLETION OF INSTALLATION, DEMONSTRATE CAPABILITY AND COMPLIANCE WITH REQUIREMENTS. CORRECT MALFUNCTIONING FIXTURES AT THE SITE, THEN RETEST TO DEMONSTRATE COMPLIANCE; OTHERWISE, REMOVE MALFUNCTIONING UNITS AND REPLACE WITH NEW UNITS AND PROCEED WITH RETESTING.

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	11-09-2023	ISSUED FOR PERMIT	A.I.
01			
02			
03			
04			
CLIENT/CONSULTANT APPROVAL STATUS			
APPROVED		(A)	
APPROVED WITH NOTES		(B)	
RESUBMIT		(C)	
DISAPPROVED		(D)	
OWNER:			

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

ELECTRICAL

PROJECT TITLE:

CROWL BUILDING


DRAWING TITLE:

NOTES

DRAWN BY:	CHECKED BY:	DATE:
A.S	N.B	02 JUL 2023
JOB NO	SHT NO	SCALE:
632	EL-01	NTS

GENERAL POWER PLAN NOTES:

1. 15A AND 20A, 125V AND 250V NON LOCKING TYPE RECEPTACLES IN BUSINESS OFFICES, CORRIDORS, WAITING ROOMS AND THE LIKE IN CLINICS, MEDICAL AND DENTAL OFFICES, AND OUTPATIENT FACILITIES SHALL BE TAMPER RESISTANT PER CEC 406.12
2. ELECTRICAL CONTRACTOR TO VERIFY ALL EXISTING SITE CONDITIONS & MAKE ANY NECESSARY ADJUSTMENTS.
3. SMALLEST WIRE & SIZE TO BE #12 AWG.
4. ALL WORK SHALL COMPLY WITH THE CALIFORNIA ELECTRIC CODE, CALIFORNIA BUILDING CODE, & ANY OTHER APPLICABLE REGULATIONS OR CODES.
5. CONTRACTOR TO LOCATE PHONE, CABLE, ETC. AS PER OWNER'S SPECIFICATIONS.
6. ALL WIRE SIZES ARE BASED ON 75°C COPPER.
7. ALL OUTDOOR EQUIPMENT SHALL BE NEMA-3R RATED. ALL INDOOR EQUIPMENT SHALL BE NEMA-1 RATED.
8. CONTRACTOR TO COORDINATE EXACT LOCATION OF ELECTRICAL PANELS. NEW PANELS SHALL HAVE CEC REQUIRED MINIMUM WORKING CLEARANCE OF 42" DEEP AND 30" WIDE IN FRONT OF THE PANELS.
9. COORDINATE ALL SERVICE AND METERING DETAILS INCLUDING ANY RELOCATION OF EXISTING EQUIPMENT WITH LOCAL UTILITY COMPANY.
10. CONTRACTOR TO PAY UTILITY COMPANY FEES CHARGED TO OWNER FOR WORK ASSOCIATED WITH THIS PROJECT. THOSE CHARGES SHALL BE INCLUDED IN THE BID IF POSSIBLE. IF THIS INFORMATION IS NOT AVAILABLE PRIOR TO BID DATE, INDICATE EXCLUSIONS OF THESE COSTS ON BID FORM.
11. FURNISH AND INSTALL MATERIALS FOR A TEMPORARY CONSTRUCTION SERVICES AS REQUIRED.
12. FURNISH AND INSTALL ALL REQUIRED MATERIAL AND LABOR IN COMPLIANCE WITH UTILITY COMPANY REQUIREMENTS. PROVIDE A COMPLETE ELECTRICAL SERVICE AS SHOWN ON DRAWINGS.
13. GROUND SERVICE EQUIPMENT TO COLD WATER PIPE AND TO CONCRETE ENCASED ELECTRODE IN ACCORDANCE WITH NEC.
14. CONTRACTOR SHALL BE RESPONSIBLE FOR ADEQUATELY BRACING AND PROTECTING ALL WORK. DURING CONSTRUCTION AGAINST DAMAGES, BREAKAGE, COLLAPSE, AND MISALIGNMENT ACCORDING TO APPLICABLE CODES, STANDARDS, AND GOOD CONSTRUCTION PRACTICES. CONTRACTOR SHALL TAKE PROPER PRECAUTIONS TO PROTECT ALL EXISTING OPERATIONS AND PROPERTY ADJACENT WITH WHICH WORK COMES IN CONTACT, OR OVER, OR UNDER WHICH HE MAY TRANSPORT, HOIST, OR MOVE MATERIALS, EQUIPMENT, DEBRIS, ETC., AND SHALL REPAIR ALL DAMAGES CAUSED BY THEM DURING CONSTRUCTION TO OWNER'S SATISFACTION.

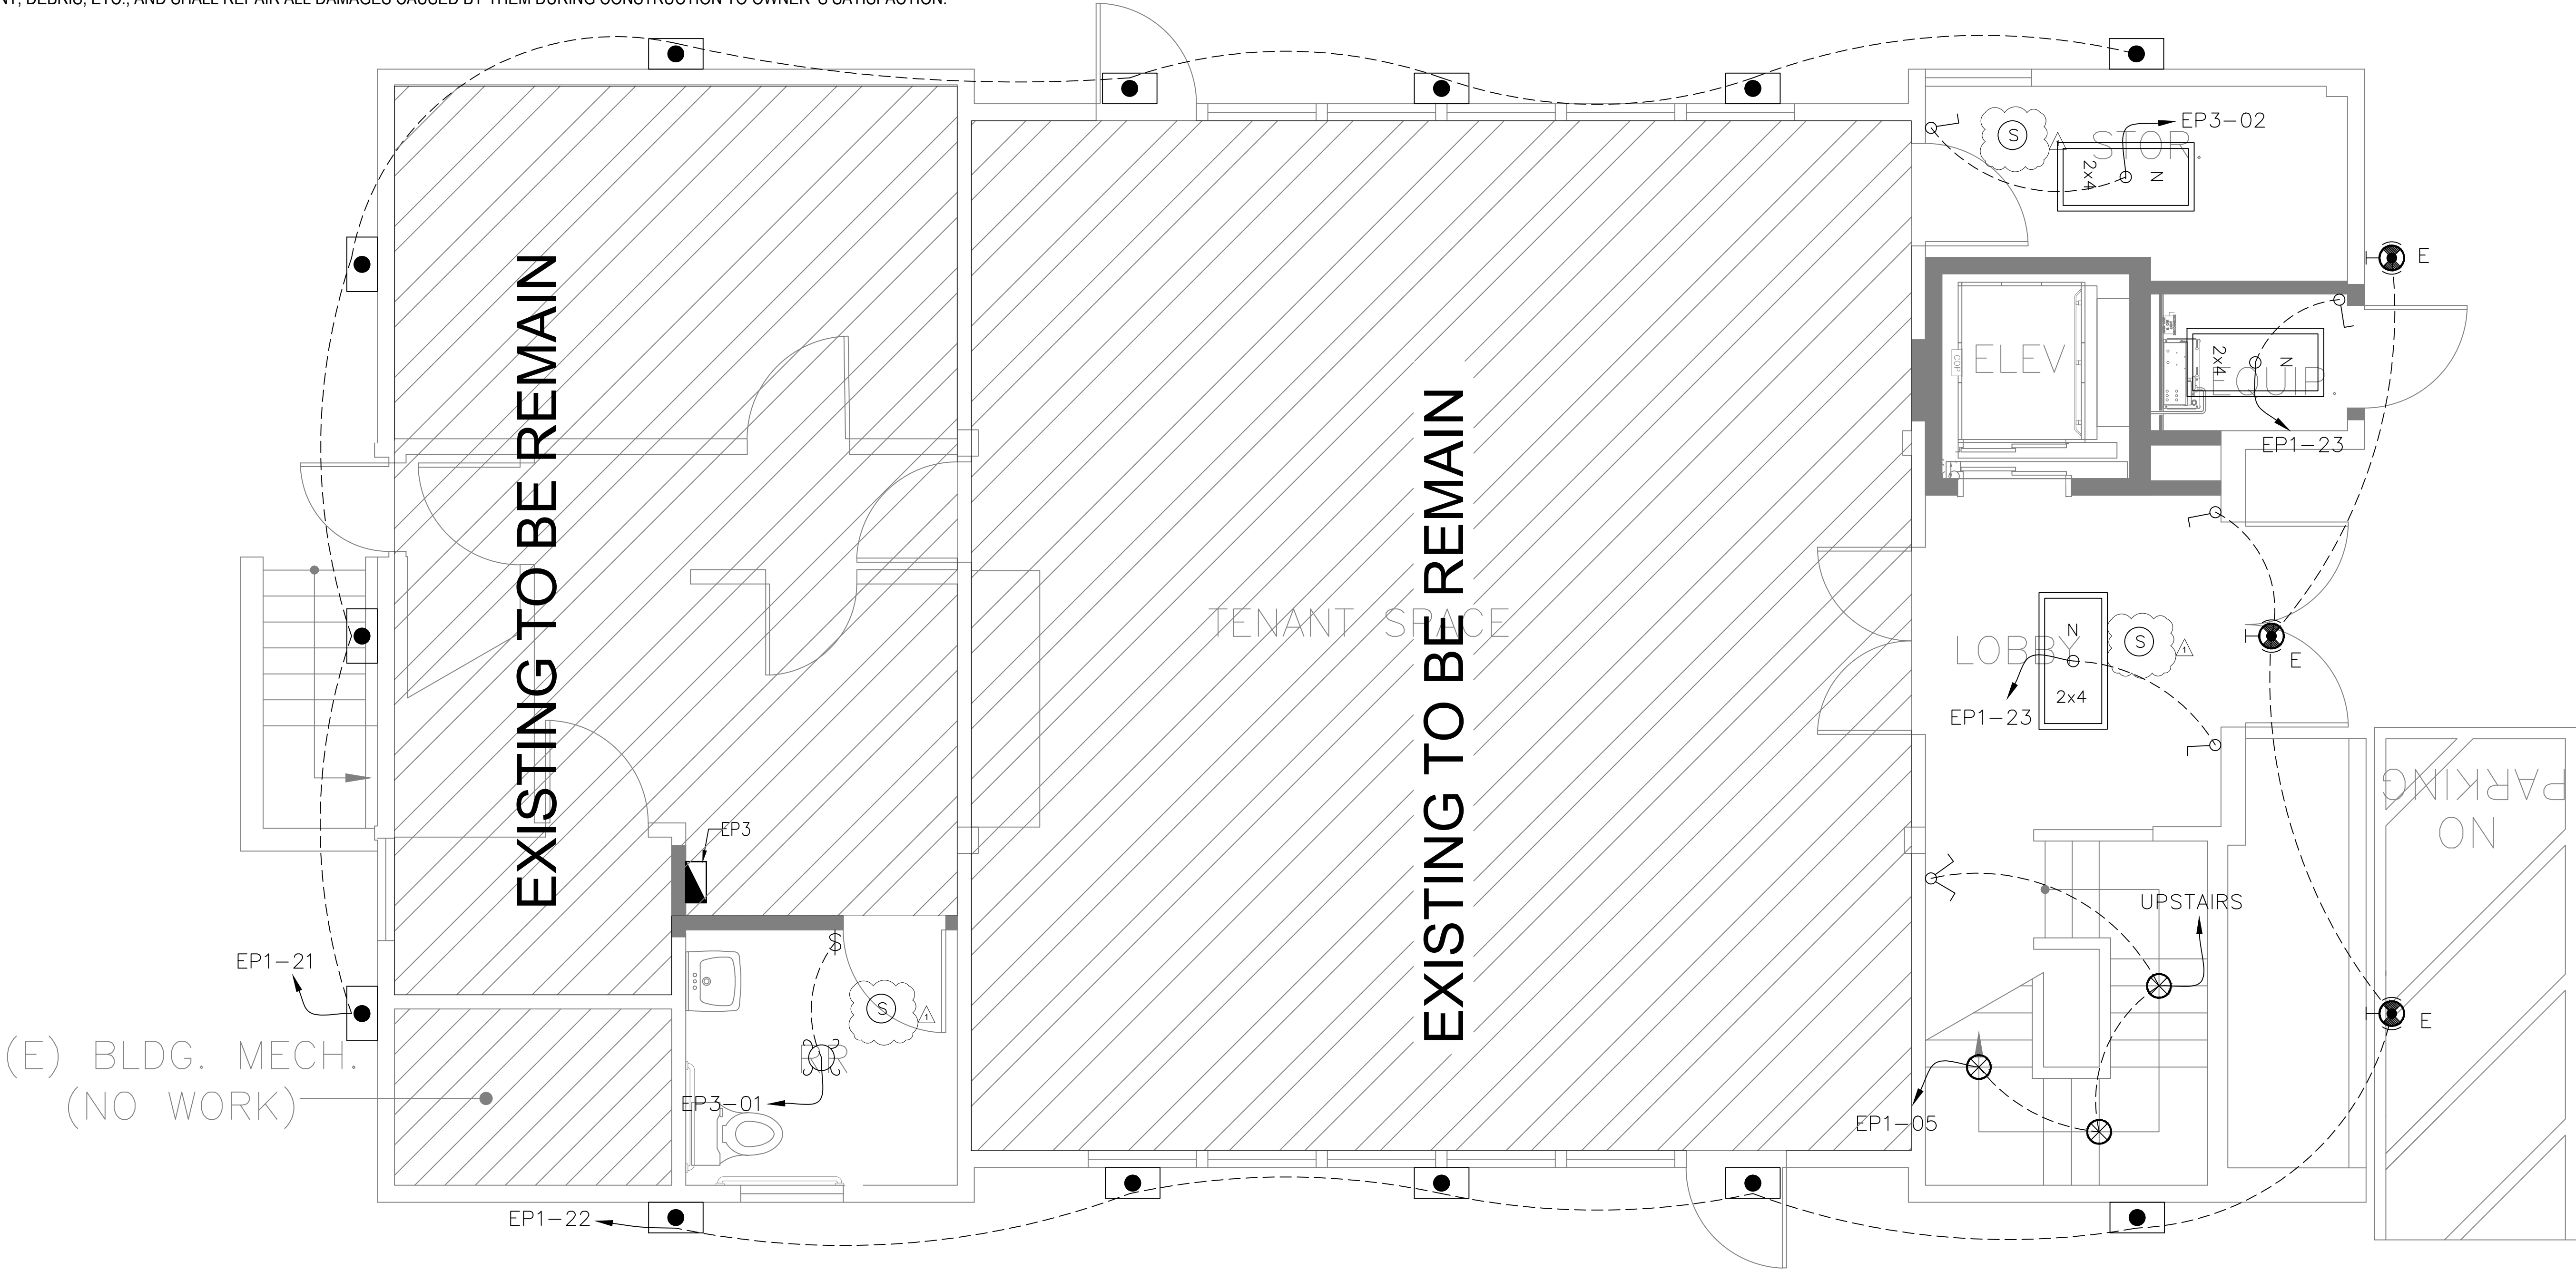

EL
02

FIRST FLOOR LIGHTING PLAN

SCALE

3/8"=1'-0"

ELECTRICAL ONLY
ELC ELECTRICAL CONSULTING

PROFESSIONAL ENGINEER
E 23717
EXP: 12/31/25
ELECTRICAL
STATE OF CALIFORNIA

Unauthorized use of a PE stamp is an illegal act.

LEGEND :		
NO	SYMBOL	DESCRIPTION
13		MIDLAND LIGHT PRO 1-LIGHT INTEGRATED LED GOLD FINISH MINI GLOBE PENDANT WITH CLEAR BUBBLE GLASS SHADE
12		20W 2 FT x 4 FT. CENTER BASKET INTEGRATED LED PANEL LIGHT TROFFER
01		120 V SMALL NARROW PENDANT (BRASS/STANDARD) - OPEN BOX RETURN
01		120 V SMALL MEDIUM PENDANT LIGHT (BRASS/STANDARD) - OPEN BOX RETURN
06		8W 1-LIGHT POLISHED NICKEL/BRUSHED BRASS LED PENDANT LIGHT WITH K9 CRYSTAL -POLISHED NICKEL
02		120 V BRYNNE LED PENDANT (BRUSHED BRASS/14 INCH OPEN BOX RETURN)
01		3-LIGHT POLISHED NICKEL/BRUSHED BRASS LED CLUSTER PENDANT LIGHT WITH K9 CRYSTAL COLOURED NICKEL
01		120 V LUCA FLUSHMOUNT (PHOTO WALNUT VENEER/19 IN) OPEN BOX RETURN
13		HINKLEY BACK DUSK TO DAWN OUTDOOR HARDWIRED CEMETERY WALL LANTERN SCONCE WITH INTEGRATED LED UP/DOWN LIGHTS
02		VENTILATION FAN / DIMMABLE LED LIGHT HEAD AND SAVE THESE INSTRUCTIONS
01		CASS BATH LED BAR (GOLD/LARGE) - OPEN BOX RETURN
		MAIN DISCONNECT LOCATION
		20W EMERGENCY LIGHTING
		20W EXISTING OUTLET -WILL USE FOR LARGE OVERHEAD DIMMABLE LED LIGHTS
		10W THIS MEANS IT A NEW LOCATION THAT NEEDS A WIRING PLAN. WILL USE FIXTURE THAT EXITS AND CONVERT THEM TO DIMMABLE LED
		OCCUPANCY SENSORS MULTI-LEVEL CONTROLS
		10W SURFACE MOUNTED LIGHT IN STAIRS
		OCCUPANCY SENSING SWITCH
		ONE WAY ONE GANG SWITCH
		ONE WAY TWO GANG SWITCH
		ONE WAY THREE GANG SWITCH
		TWO WAY ONE GANG SWITCH
		TWO WAY TWO GANG SWITCH
		ELECTRICAL PANEL BOARD, TYPE INDICATED.

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	11-09-2023	ISSUED FOR PERMIT	A.I.
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

ELECTRICAL

PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:



FIRST FLOOR LIGHTING PLAN

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO EL-02	SCALE:

GENERAL POWER PLAN NOTES:

1. 15A AND 20A, 125V AND 250V NON LOCKING TYPE RECEPTACLES IN BUSINESS OFFICES, CORRIDORS, WAITING ROOMS AND THE LIKE IN CLINICS, MEDICAL AND DENTAL OFFICES, AND OUTPATIENT FACILITIES SHALL BE TAMPER RESISTANT PER CEC 406.12
2. ELECTRICAL CONTRACTOR TO VERIFY ALL EXISTING SITE CONDITIONS & MAKE ANY NECESSARY ADJUSTMENTS.
3. SMALLEST WIRE & SIZE TO BE #12 AWG.
4. ALL WORK SHALL COMPLY WITH THE CALIFORNIA ELECTRIC CODE, CALIFORNIA BUILDING CODE, & ANY OTHER APPLICABLE REGULATIONS OR CODES.
5. CONTRACTOR TO LOCATE PHONE, CABLE, ETC. AS PER OWNER'S SPECIFICATIONS.
6. ALL WIRE SIZES ARE BASED ON 75°C COPPER.
7. ALL OUTDOOR EQUIPMENT SHALL BE NEMA-3R RATED. ALL INDOOR EQUIPMENT SHALL BE NEMA-1 RATED.
8. CONTRACTOR TO COORDINATE EXACT LOCATION OF ELECTRICAL PANELS. NEW PANELS SHALL HAVE CEC REQUIRED MINIMUM WORKING CLEARANCE OF 42" DEEP AND 30" WIDE IN FRONT OF THE PANELS.
9. COORDINATE ALL SERVICE AND METERING DETAILS INCLUDING ANY RELOCATION OF EXISTING EQUIPMENT WITH LOCAL UTILITY COMPANY.
10. CONTRACTOR TO PAY UTILITY COMPANY FEES CHARGED TO OWNER FOR WORK ASSOCIATED WITH THIS PROJECT. THOSE CHARGES SHALL BE INCLUDED IN THE BID IF POSSIBLE. IF THIS INFORMATION IS NOT AVAILABLE PRIOR TO BID DATE, INDICATE EXCLUSIONS OF THESE COSTS ON BID FORM.
11. FURNISH AND INSTALL MATERIALS FOR A TEMPORARY CONSTRUCTION SERVICES AS REQUIRED.
12. FURNISH AND INSTALL ALL REQUIRED MATERIAL AND LABOR IN COMPLIANCE WITH UTILITY COMPANY REQUIREMENTS. PROVIDE A COMPLETE ELECTRICAL SERVICE AS SHOWN ON DRAWINGS.
13. GROUND SERVICE EQUIPMENT TO COLD WATER PIPE AND TO CONCRETE ENCASED ELECTRODE IN ACCORDANCE WITH NEC.
14. CONTRACTOR SHALL BE RESPONSIBLE FOR ADEQUATELY BRACING AND PROTECTING ALL WORK. DURING CONSTRUCTION AGAINST DAMAGES, BREAKAGE, COLLAPSE, AND MISALIGNMENT ACCORDING TO APPLICABLE CODES, STANDARDS, AND GOOD CONSTRUCTION PRACTICES. CONTRACTOR SHALL TAKE PROPER PRECAUTIONS TO PROTECT ALL EXISTING OPERATIONS AND PROPERTY ADJACENT WITH WHICH WORK COMES IN CONTACT, OR OVER, OR UNDER WHICH HE MAY TRANSPORT, HOIST, OR MOVE MATERIALS, EQUIPMENT, DEBRIS, ETC., AND SHALL REPAIR ALL DAMAGES CAUSED BY THEM DURING CONSTRUCTION TO OWNER'S SATISFACTION.

LIGHTING FIXTURE SCHEDULE				
SYMBOL	MODEL	MANUFACTURER	ORDERED FROM	DESCRIPTION
	PENDANT	SSL/PHILIPS/LIGHTOLIER	DAL	MODLAND LIGHT PRO 1-LIGHT INTEGRATED LED GOLD FINISH MINI GLOBE PENDANT WITH CLEAR BUBBLE GLASS SHADE
	4" RECESSED DOWNLIGHT	SSL/PHILIPS/LIGHTOLIER	DAL	SOW 2 FT.X4 FT. CENTER BASKET INTEGRATED LED PANEL LIGHT TROFFER
	PENDANT	SSL/PHILIPS/LIGHTOLIER	DAL	120 V SWELL NARROW PENDANT (BRASS/STANDARD) - OPEN BOX RETURN
	PENDANT	SSL/PHILIPS/LIGHTOLIER	DAL	120 V SWELL MEDIUM PENDANT LIGHT (BRASS/STANDARD) OPEN BOX RETURN
	PENDANT	SSL/PHILIPS/LIGHTOLIER	DAL	8W 1-LIGHT POLISHED NICKEL/BRUSHED BRASS LED PENDANT LIGHT WITH K9 CRYSTAL -POLISHED NICKEL
	PENDANT	SSL/PHILIPS/LIGHTOLIER	DAL	120 V BRYNNE LED PENDANT (BURNISHED BRASS/14 INCH) OPEN BOX RETURN
	PENDANT	SSL/PHILIPS/LIGHTOLIER	DAL	3-LIGHT POLISHED NICKEL/BRUSHED BRASS LED CLUSTER PENCILANT LIGHT WITH K9 CRYSTAL POLISHED NICKEL
	4" RECESSED DOWNLIGHT	SSL/PHILIPS/LIGHTOLIER	DAL	120 V LUCA FLUSHMOUNT (PHOTO WALNUT VENEER/19 IN) OPEN BOX RETURN
	WALL MOUNTED	SSL/PHILIPS/LIGHTOLIER	DAL	HKMG2T BLACK DUSK TO DAWN OUTDOOR HARDWIRED CYLINDER WALL LANTERN SCENE WITH INTEGRATED LED UP-DOWN LIGHTS
	4" RECESSED DOWNLIGHT	SSL/PHILIPS/LIGHTOLIER	DAL	VENTILATION FAN / DIMMABLE LED LIGHT READ AND SAVE THESE INSTRUCTIONS
	WALL LIGHT	SSL/PHILIPS/LIGHTOLIER	DAL	CASS BATH LED BAR (GOLD/LARGE) - OPEN BOX RETURN
	DISCONNECT	SSL/PHILIPS/LIGHTOLIER	DAL	MAIN DISCONNECT LOCATION
	EMERGENCY	SSL/PHILIPS/LIGHTOLIER	DAL	20W EMERGENCY LIGHTING
	4" RECESSED DOWNLIGHT	SSL/PHILIPS/LIGHTOLIER	DAL	20W EXISTING OUTLET -WILL USE FOR LARGE OVERHEAD DIMMABLE LED LIGHTS
	4" RECESSED DOWNLIGHT	SSL/PHILIPS/LIGHTOLIER	DAL	100W THIS MEANS IT A NEW LOCATION THAT NEED A WIRING PLAN, WILL USE FIXTURE THAT EXIST AND CONVERT THEN TO DIMMABLE CEO
	OCCUPANCY SENSORS	SSL/PHILIPS/LIGHTOLIER	DAL	OCCUPANCY SENSORS MULTI-LEVEL CONTROLS CONTINUES DIMMING 10-100 PERCENT REQUIRED IN ACCORDANCE WITH 2022 CA ENERGY CODE, TITLE 24
	4" RECESSED DOWNLIGHT	SSL/PHILIPS/LIGHTOLIER	DAL	15W SURFACE MOUNTED LIGHT IN STAIRS

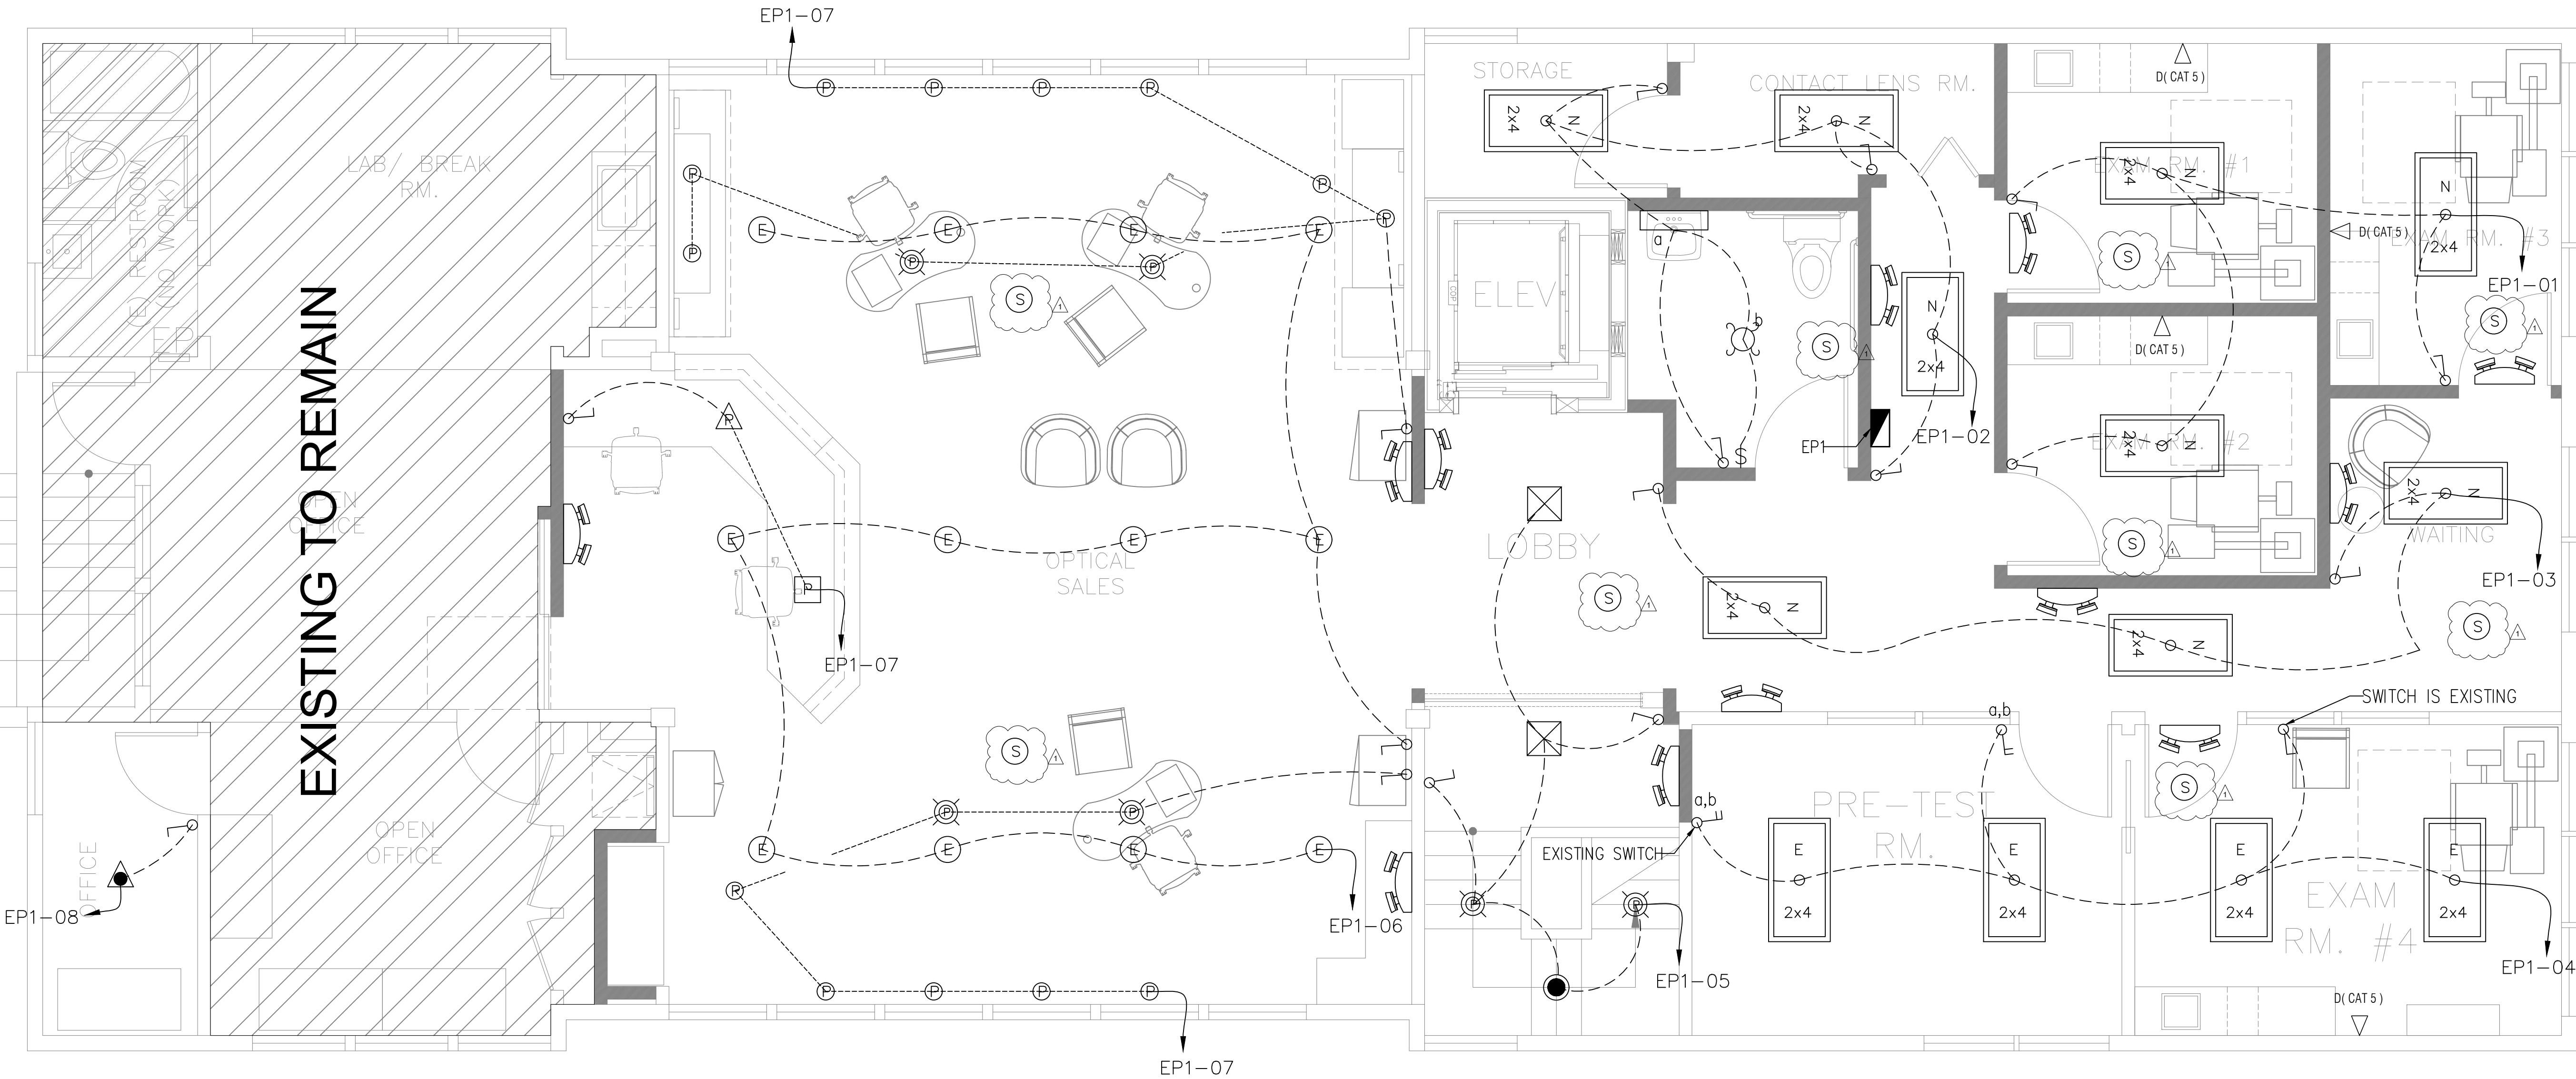

SECOND FLOOR LIGHTING PLAN

SCALE

1/4"=1'-0"

ELECTRICAL ONLY
ELC ELECTRICAL CONSULTING

Unauthorized use of a PE stamp is an illegal act.

LEGEND :

NO	SYMBOL	DESCRIPTION
13		MODLAND LIGHT PRO 1-LIGHT INTEGRATED LED GOLD FINISH MINI GLOBE PENDANT WITH CLEAR BUBBLE GLASS SHADE
12		SOW 2 FT.X4 FT. CENTER BASKET INTEGRATED LED PANEL LIGHT TROFFER
01		120 V SWELL NARROW PENDANT (BRASS/STANDARD) - OPEN BOX RETURN
01		120 V SWELL MEDIUM PENDANT LIGHT (BRASS/STANDARD) OPEN BOX RETURN
06		8W 1-LIGHT POLISHED NICKEL/BRUSHED BRASS LED PENDANT LIGHT WITH K9 CRYSTAL -POLISHED NICKEL
02		120 V BRYNNE LED PENDANT (BURNISHED BRASS/14 INCH) OPEN BOX RETURN
01		3-LIGHT POLISHED NICKEL/BRUSHED BRASS LED CLUSTER PENCILANT LIGHT WITH K9 CRYSTAL POLISHED NICKEL
01		120 V LUCA FLUSHMOUNT (PHOTO WALNUT VENEER/19 IN) OPEN BOX RETURN
13		HKMG2T BLACK DUSK TO DAWN OUTDOOR HARDWIRED CYLINDER WALL LANTERN SCENE WITH INTEGRATED LED UP-DOWN LIGHTS
02		VENTILATION FAN / DIMMABLE LED LIGHT READ AND SAVE THESE INSTRUCTIONS
01		CASS BATH LED BAR (GOLD/LARGE) - OPEN BOX RETURN
		MAIN DISCONNECT LOCATION
		20W EMERGENCY LIGHTING
		20W EXISTING OUTLET -WILL USE FOR LARGE OVERHEAD DIMMABLE LED LIGHTS
		100W THIS MEANS IT A NEW LOCATION THAT NEED A WIRING PLAN, WILL USE FIXTURE THAT EXIST AND CONVERT THEN TO DIMMABLE CEO
		OCCUPANCY SENSORS MULTI-LEVEL CONTROLS
		15W SURFACE MOUNTED LIGHT IN STAIRS
		OCCUPANCY SENSING SWITCH
		ONE WAY ONE GANG SWITCH
		ONE WAY TWO GANG SWITCH
		ONE WAY THREE GANG SWITCH
		TWO WAY ONE GANG SWITCH
		TWO WAY TWO GANG SWITCH
		ELECTRICAL PANEL BOARD, TYPE INDICATED.

OWNER SIGNATURE

REVISION STATUS

Rev	DATE	DESCRIPTION	DRAWN BY
00	11-09-2023	ISSUED FOR PERMIT	A.I.
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS

APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

ELECTRICAL

PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:

SECOND FLOOR LIGHTING PLAN


DRAWN BY:	CHECKED BY:	DATE:
A.S	N.B	02 JUL. 2023
JOB NO	SHT NO	SCALE:
632	EL-03	1/4"=1'-0"

GENERAL POWER PLAN NOTES:

1. 15A AND 20A, 125V AND 250V NON LOCKING TYPE RECEPTACLES IN BUSINESS OFFICES, CORRIDORS, WAITING ROOMS AND THE LIKE IN CLINICS, MEDICAL AND DENTAL OFFICES, AND OUTPATIENT FACILITIES SHALL BE TAMPER RESISTANT PER CEC 406.12
2. ELECTRICAL CONTRACTOR TO VERIFY ALL EXISTING SITE CONDITIONS & MAKE ANY NECESSARY ADJUSTMENTS.
3. SMALLEST WIRE & SIZE TO BE #12 AWG.
4. ALL WORK SHALL COMPLY WITH THE CALIFORNIA ELECTRIC CODE, CALIFORNIA BUILDING CODE, & ANY OTHER APPLICABLE REGULATIONS OR CODES.
5. CONTRACTOR TO LOCATE PHONE, CABLE, ETC. AS PER OWNER'S SPECIFICATIONS.
6. ALL WIRE SIZES ARE BASED ON 75°C COPPER.
7. ALL OUTDOOR EQUIPMENT SHALL BE NEMA-3R RATED. ALL INDOOR EQUIPMENT SHALL BE NEMA-1 RATED.
8. CONTRACTOR TO COORDINATE EXACT LOCATION OF ELECTRICAL PANELS. NEW PANELS SHALL HAVE CEC REQUIRED MINIMUM WORKING CLEARANCE OF 42" DEEP AND 30" WIDE IN FRONT OF THE PANELS.
9. COORDINATE ALL SERVICE AND METERING DETAILS INCLUDING ANY RELOCATION OF EXISTING EQUIPMENT WITH LOCAL UTILITY COMPANY.
10. CONTRACTOR TO PAY UTILITY COMPANY FEES CHARGED TO OWNER FOR WORK ASSOCIATED WITH THIS PROJECT. THOSE CHARGES SHALL BE INCLUDED IN THE BID IF POSSIBLE. IF THIS INFORMATION IS NOT AVAILABLE PRIOR TO BID DATE, INDICATE EXCLUSIONS OF THESE COSTS ON BID FORM.
11. FURNISH AND INSTALL MATERIALS FOR A TEMPORARY CONSTRUCTION SERVICES AS REQUIRED.
12. FURNISH AND INSTALL ALL REQUIRED MATERIAL AND LABOR IN COMPLIANCE WITH UTILITY COMPANY REQUIREMENTS. PROVIDE A COMPLETE ELECTRICAL SERVICE AS SHOWN ON DRAWINGS.
13. GROUND SERVICE EQUIPMENT TO COLD WATER PIPE AND TO CONCRETE ENCASED ELECTRODE IN ACCORDANCE WITH NEC.
14. CONTRACTOR SHALL BE RESPONSIBLE FOR ADEQUATELY BRACING AND PROTECTING ALL WORK. DURING CONSTRUCTION AGAINST DAMAGES, BREAKAGE, COLLAPSE, AND MISALIGNMENT ACCORDING TO APPLICABLE CODES, STANDARDS, AND GOOD CONSTRUCTION PRACTICES. CONTRACTOR SHALL TAKE PROPER PRECAUTIONS TO PROTECT ALL EXISTING OPERATIONS AND PROPERTY ADJACENT WITH WHICH WORK COMES IN CONTACT, OR OVER, OR UNDER WHICH HE MAY TRANSPORT, HOIST, OR MOVE MATERIALS, EQUIPMENT, DEBRIS, ETC., AND SHALL REPAIR ALL DAMAGES CAUSED BY THEM DURING CONSTRUCTION TO OWNER'S SATISFACTION.

MECHANICAL AND PLUMBING EQUIPMENT NOTES:

EXACT EQUIPMENT SELECTION WAS NOT AVAILABLE AT THE TIME OF ELECTRICAL DESIGN. EQUIPMENT REQUIREMENTS HAVE BEEN ASSUMED. ELECTRICAL CONTRACTOR SHALL CONFIRM EXACT EQUIPMENT REQUIREMENTS BEFORE INSTALLING CIRCUIT BREAKER, DISCONNECT SWITCH, WIRE, CONDUIT, AND ANY ASSOCIATED EQUIPMENT/MATERIALS.

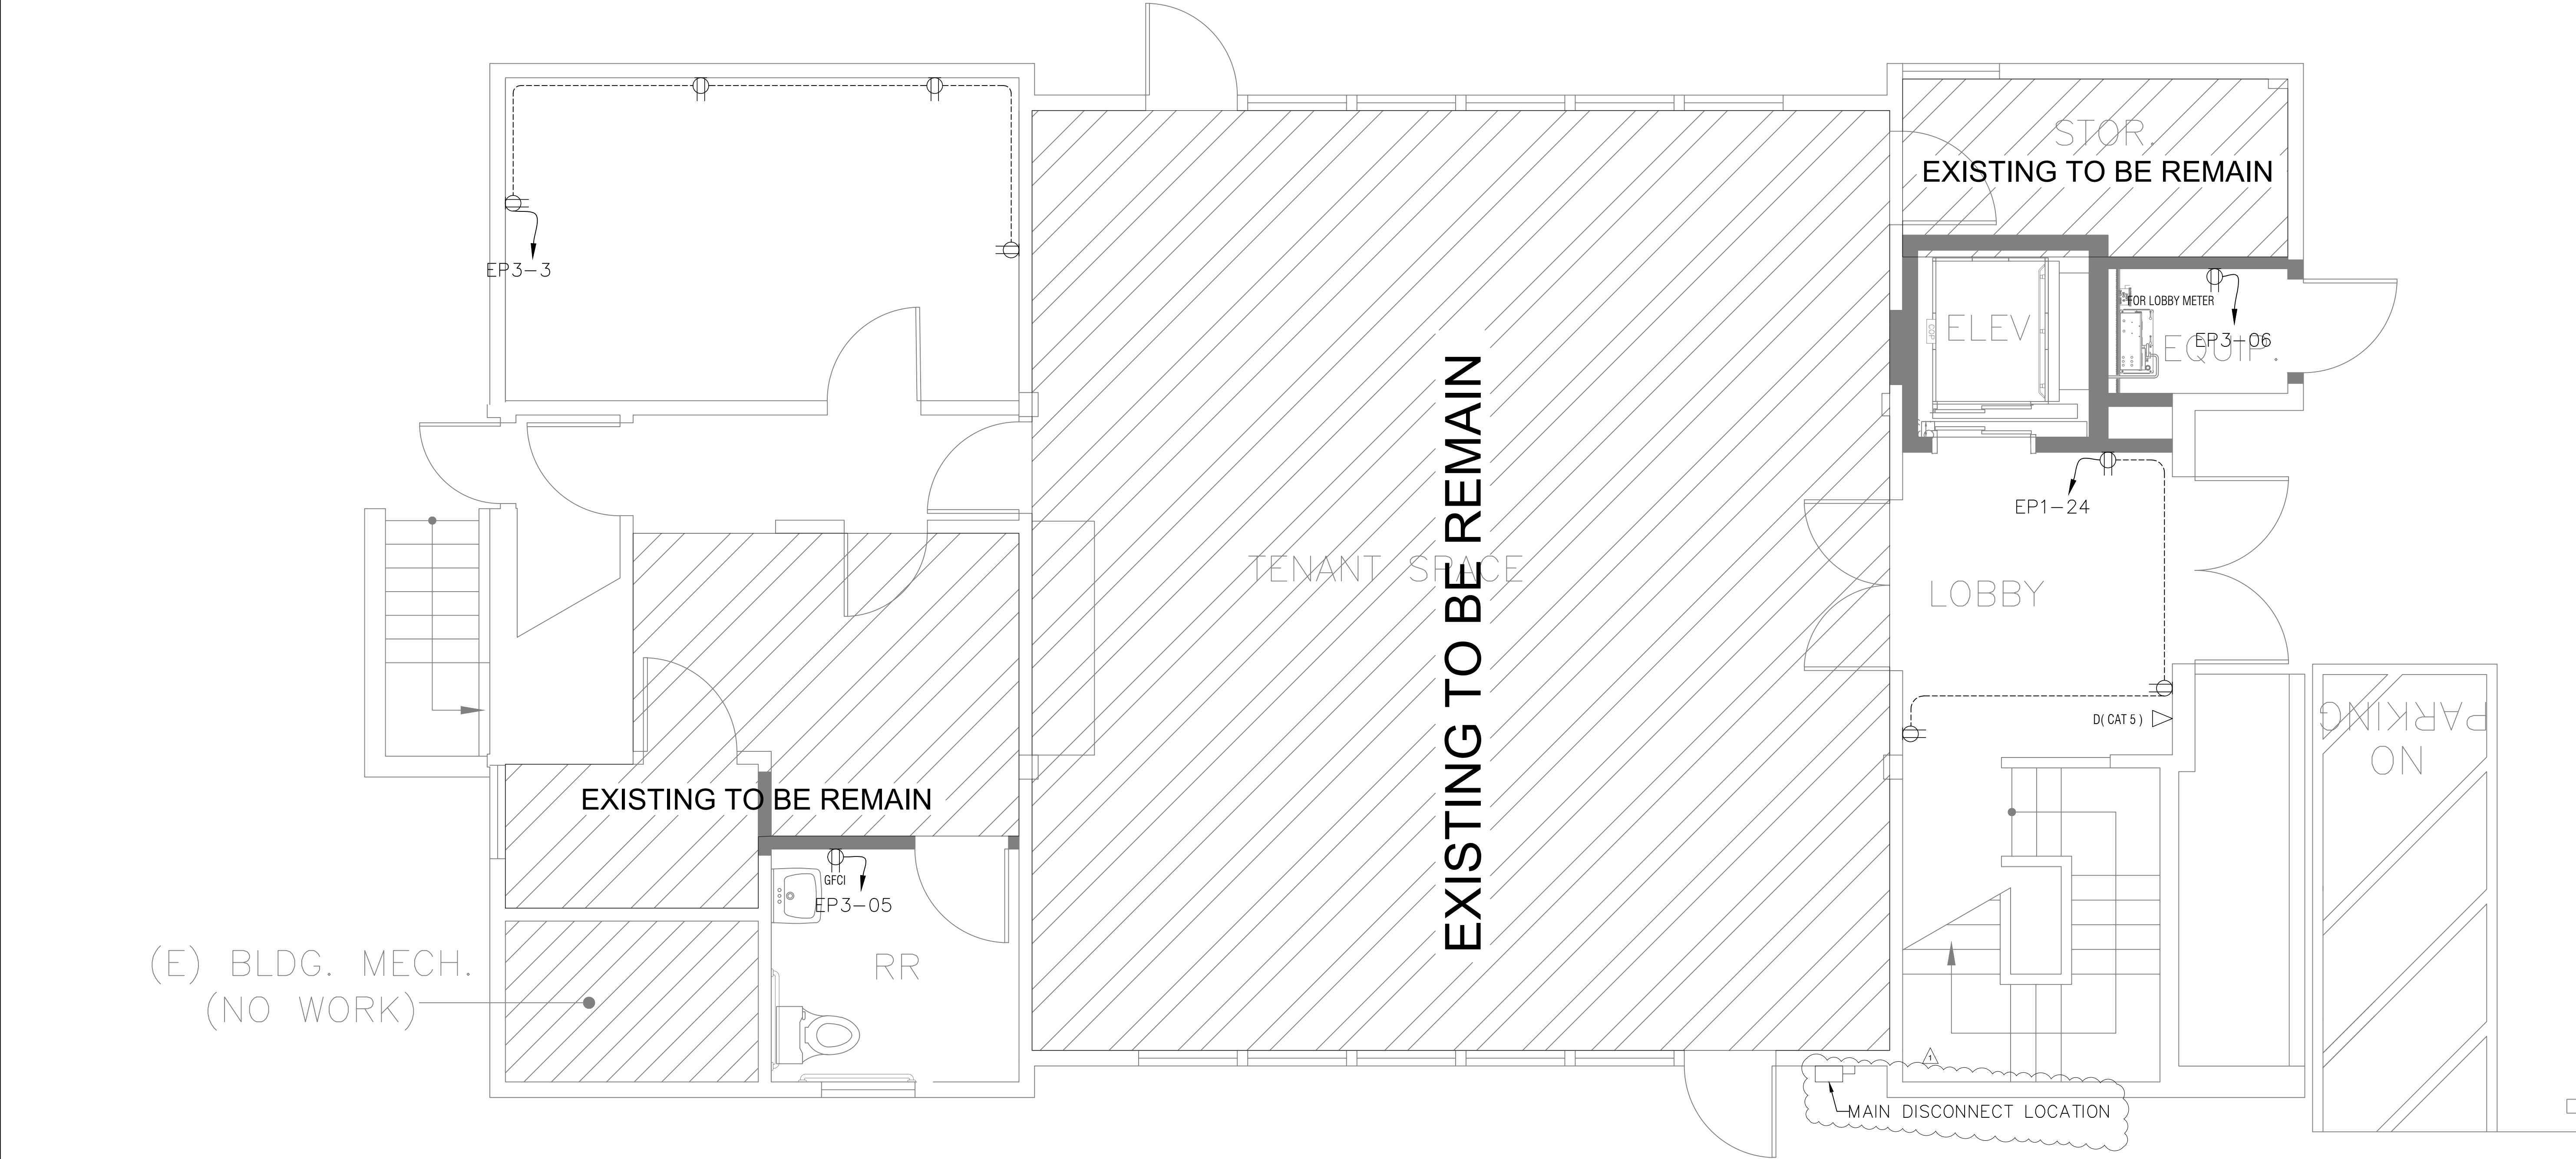

EL04

FIRST FLOOR POWER PLAN

SCALE3/8"=1'-0"

ELECTRICAL ONLY
ELC ELECTRICAL CONSULTING

PROFESSIONAL ENGINEER
E 23717
EXP: 12/31/25
ELECTRICAL
STATE OF CALIFORNIA

Unauthorized use of a PE stamp is an illegal act.

: LEGEND :

SYMBOL	DESCRIPTION
⊕	SINGLE SOCKET OUTLET, 13A, 230V, GROUNDING TYPE: MOUNT AT 42" A.F.F. UNLESS NOTED OTHERWISE.
⊕	DUPLEX SOCKET OUTLET, 13A, 230V, GROUNDING TYPE: MOUNT AT 18" A.F.F. UNLESS NOTED OTHERWISE.
⊕	GFCI DUPLEX SOCKET OUTLET, WEATHER PROOF, 13A, 230V, GROUNDING TYPE: MOUNT AT 42" A.F.F. UNLESS NOTED OTHERWISE.
⊕	POINT FOR KITCHEN HOT PLATE, 32A, GROUNDING TYPE: MOUNT AT 42" A.F.F. UNLESS NOTED OTHERWISE.
TV	TV SOCKET HEIGHT AS PER LCD ON LOCATION
⊕ ▽	DATA OUTLET: PROVIDE SINGLE GANG JUNCTION BOX WITH PLASTER RING. STUB UP 1" E.C. WITH PULL STRING INTO ACCESSIBLE CEILING SPACE. MOUNT AT 18" A.F.F. UNLESS NOTED OTHERWISE.
⊕	FLOOR BOX

EP ELECTRICAL PANEL

FB

⊕
⊕
⊕
⊕

DUPLEX
DATA OUTLET
SPARE
TELEPHONE OUTLET

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	11-09-2023	⚠️ ISSUED FOR PERMIT	A.I.
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:		
DESIGN DRAWING		
DISCIPLINE:		
ELECTRICAL		
PROJECT TITLE:		
CROWL BUILDING		
DRAWING TITLE:		
FIRST FLOOR POWER PLAN		
DRAWN BY:	CHECKED BY:	DATE:
A.S	N.B	02 JUL. 2023
JOB NO	SHT NO	SCALE:
632	EL-04	3/8"=1'-0"

GENERAL POWER PLAN NOTES:

1. 15A AND 20A, 125V AND 250V NON LOCKING TYPE RECEPTACLES IN BUSINESS OFFICES, CORRIDORS, WAITING ROOMS AND THE LIKE IN CLINICS, MEDICAL AND DENTAL OFFICES, AND OUTPATIENT FACILITIES SHALL BE TAMPER RESISTANT PER CEC 406.12
2. ELECTRICAL CONTRACTOR TO VERIFY ALL EXISTING SITE CONDITIONS & MAKE ANY NECESSARY ADJUSTMENTS.
3. SMALLEST WIRE & SIZE TO BE #12 AWG.
4. ALL WORK SHALL COMPLY WITH THE CALIFORNIA ELECTRIC CODE, CALIFORNIA BUILDING CODE, & ANY OTHER APPLICABLE REGULATIONS OR CODES.
5. CONTRACTOR TO LOCATE PHONE, CABLE, ETC. AS PER OWNER'S SPECIFICATIONS.
6. ALL WIRE SIZES ARE BASED ON 75°C COPPER.
7. ALL OUTDOOR EQUIPMENT SHALL BE NEMA-3R RATED. ALL INDOOR EQUIPMENT SHALL BE NEMA-1 RATED.
8. CONTRACTOR TO COORDINATE EXACT LOCATION OF ELECTRICAL PANELS. NEW PANELS SHALL HAVE CEC REQUIRED MINIMUM WORKING CLEARANCE OF 42" DEEP AND 30" WIDE IN FRONT OF THE PANELS.
9. COORDINATE ALL SERVICE AND METERING DETAILS INCLUDING ANY RELOCATION OF EXISTING EQUIPMENT WITH LOCAL UTILITY COMPANY.
10. CONTRACTOR TO PAY UTILITY COMPANY FEES CHARGED TO OWNER FOR WORK ASSOCIATED WITH THIS PROJECT. THOSE CHARGES SHALL BE INCLUDED IN THE BID IF POSSIBLE. IF THIS INFORMATION IS NOT AVAILABLE PRIOR TO BID DATE, INDICATE EXCLUSIONS OF THESE COSTS ON BID FORM.
11. FURNISH AND INSTALL MATERIALS FOR A TEMPORARY CONSTRUCTION SERVICES AS REQUIRED.
12. FURNISH AND INSTALL ALL REQUIRED MATERIAL AND LABOR IN COMPLIANCE WITH UTILITY COMPANY REQUIREMENTS. PROVIDE A COMPLETE ELECTRICAL SERVICE AS SHOWN ON DRAWINGS.
13. GROUND SERVICE EQUIPMENT TO COLD WATER PIPE AND TO CONCRETE ENCASED ELECTRODE IN ACCORDANCE WITH NEC.
14. CONTRACTOR SHALL BE RESPONSIBLE FOR ADEQUATELY BRACING AND PROTECTING ALL WORK. DURING CONSTRUCTION AGAINST DAMAGES, BREAKAGE, COLLAPSE, AND MISALIGNMENT ACCORDING TO APPLICABLE CODES, STANDARDS, AND GOOD CONSTRUCTION PRACTICES. CONTRACTOR SHALL TAKE PROPER PRECAUTIONS TO PROTECT ALL EXISTING OPERATIONS AND PROPERTY ADJACENT WITH WHICH WORK COMES IN CONTACT, OR OVER, OR UNDER WHICH HE MAY TRANSPORT, HOIST, OR MOVE MATERIALS, EQUIPMENT, DEBRIS, ETC., AND SHALL REPAIR ALL DAMAGES CAUSED BY THEM DURING CONSTRUCTION TO OWNER'S SATISFACTION.

MECHANICAL AND PLUMBING EQUIPMENT NOTES:

EXACT EQUIPMENT SELECTION WAS NOT AVAILABLE AT THE TIME OF ELECTRICAL DESIGN. EQUIPMENT REQUIREMENTS HAVE BEEN ASSUMED. ELECTRICAL CONTRACTOR SHALL CONFIRM EXACT EQUIPMENT REQUIREMENTS BEFORE INSTALLING CIRCUIT BREAKER, DISCONNECT SWITCH, WIRE, CONDUIT, AND ANY ASSOCIATED EQUIPMENT/MATERIALS.



ELECTRICAL ONLY
ELC ELECTRICAL CONSULTING



Unauthorized use of a PE stamp is an illegal act.

: LEGEND :	
SYMBOL	DESCRIPTION
	SINGLE SOCKET OUTLET, 13A, 230V, GROUNDING TYPE. MOUNT AT 42" A.F.F. UNLESS NOTED OTHERWISE.
	DUPLEX SOCKET OUTLET, 13A, 230V, GROUNDING TYPE. MOUNT AT 18" A.F.F. UNLESS NOTED OTHERWISE.
	GFCI DUPLEX SOCKET OUTLET, WEATHER PROOF, 13A, 230V, GROUNDING TYPE. MOUNT AT 42" A.F.F. UNLESS NOTED OTHERWISE.
	POINT FOR KITCHEN HOT PLATE, 32A, GROUNDING TYPE. MOUNT AT 42" A.F.F. UNLESS NOTED OTHERWISE.
	TV SOCKET HEIGHT AS PER LCD ON LOCATION
	DATA OUTLET. PROVIDE SINGLE GANG JUNCTION BOX WITH PLASTER RING. STUB UP 1" E.C. WITH PULL STRING INTO ACCESSIBLE CEILING SPACE. MOUNT AT 18" A.F.F. UNLESS NOTED OTHERWISE.
	FLOOR BOX

EP ELECTRICAL PANEL

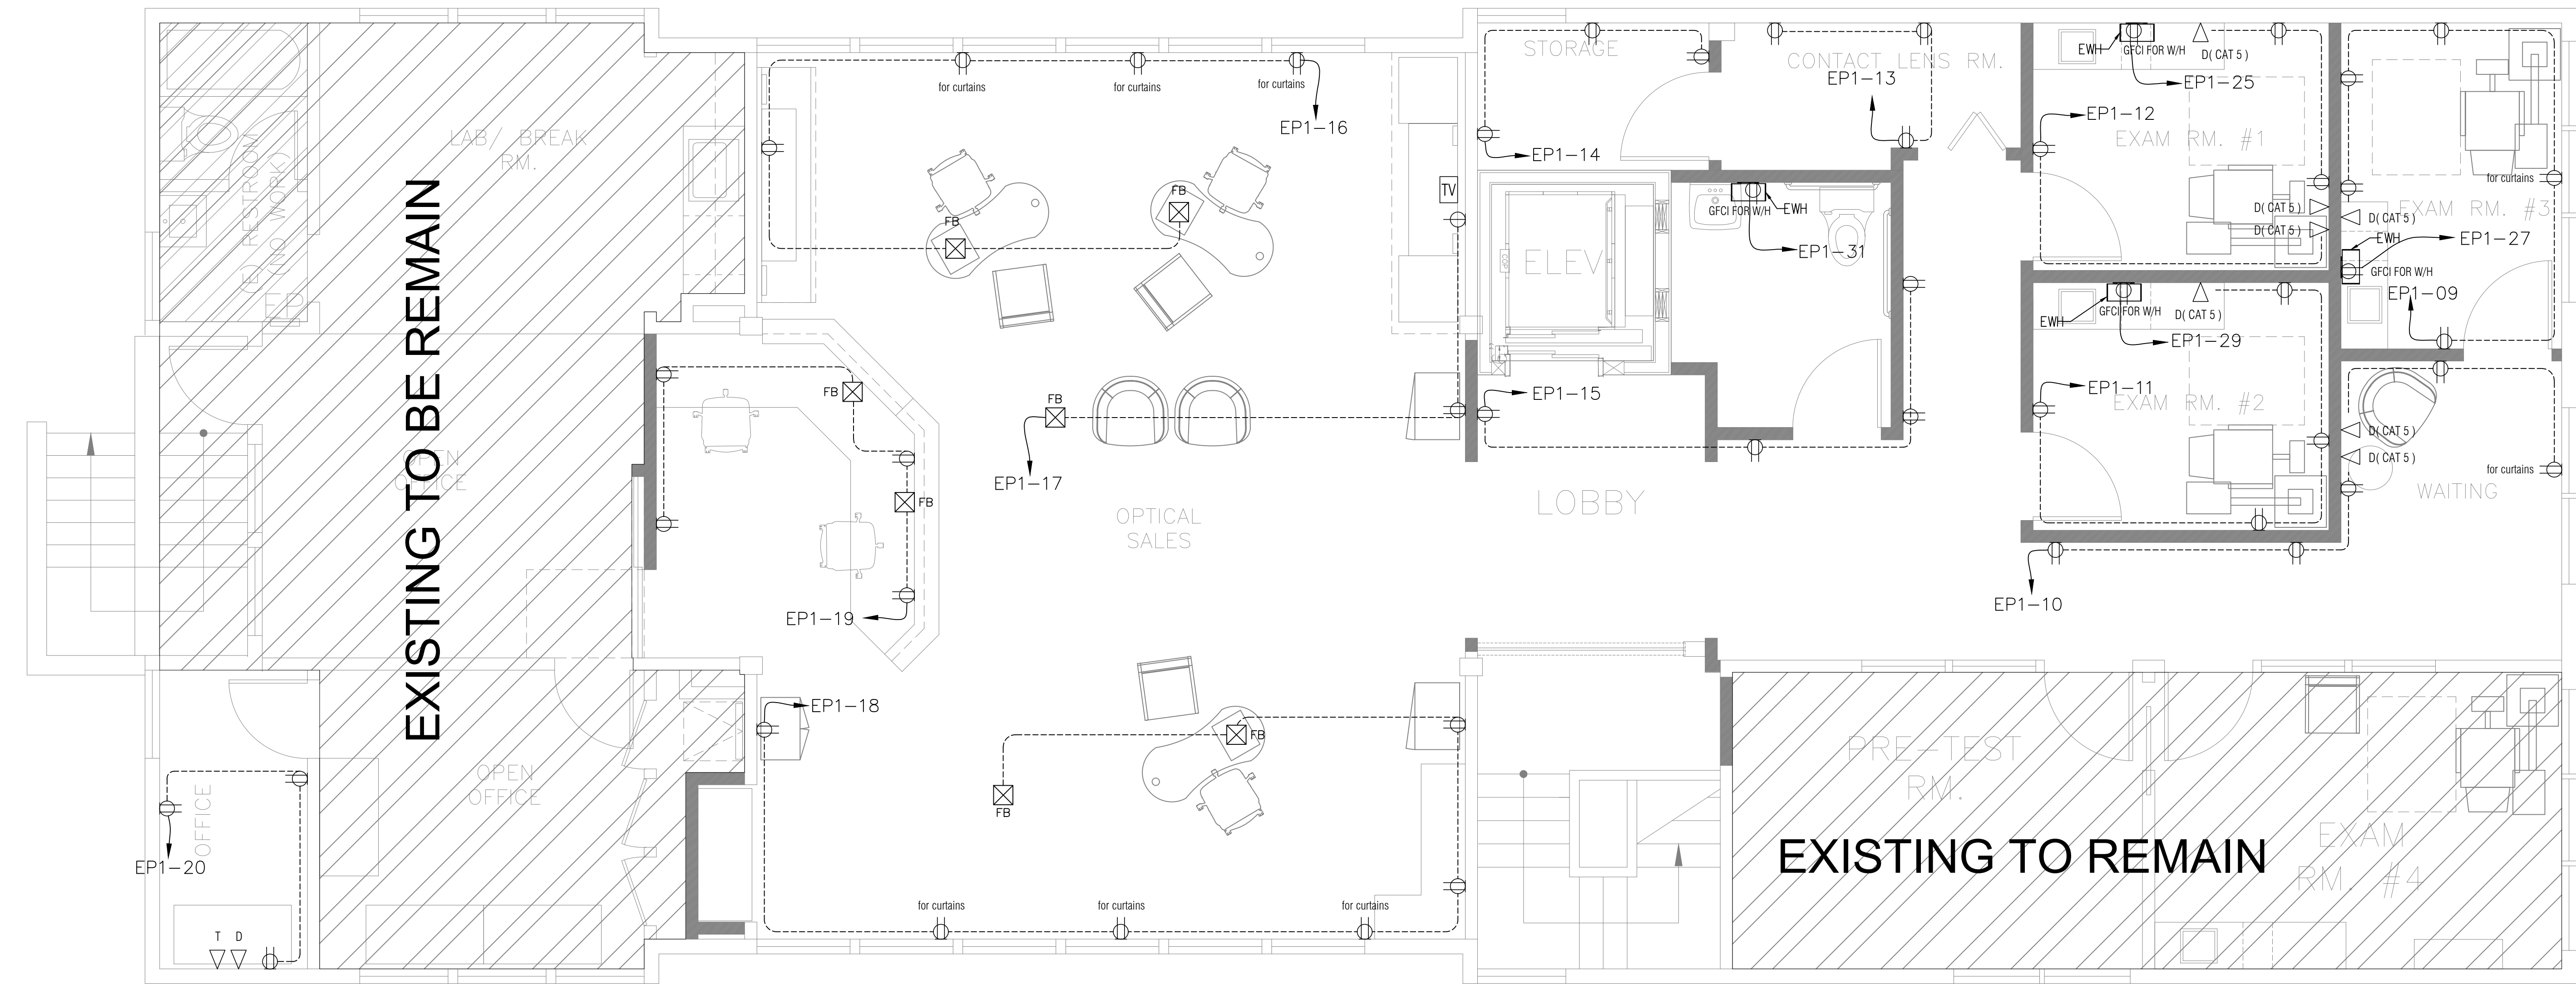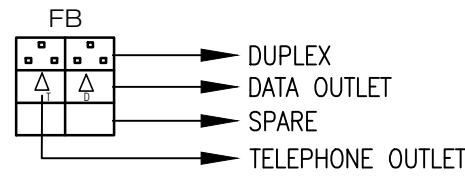

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	11-09-2023	ISSUED FOR PERMIT	A.I.
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

ELECTRICAL


PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:

SECOND FLOOR POWER PLAN

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO EL-05	SCALE: 1/4"=1'-0"



SECOND FLOOR POWER PLAN

SCALE

1/4"=1'-0"

PANELBOARD IDENTIFICATION: EP1		NEW PANEL										VOLTS 240 /120V			
LOCATION: REFER TO PLANS		MAIN		MLO		BUS		200A		PHASE 1		WIRE 3			
PROTECTIVE DEVICES: 42000 RMS SYMMETRICAL AIC MINIMUM		MOUNTING SURFACE OR RECESSED													
DESCRIPTION	WIRE & CONDUIT SIZE (INCH)	VOLT-AMP		BREAKER		CIR / POLE		CIR / POLE	BREAKER		VOLT-AMP	WIRE & CONDUIT SIZE (INCH)	DESCRIPTION		
LIGHTING	2#12+1#12G IN 3/4"	300	20	1	1	2	20	1	340	2#12+1#12G IN 3/4"	LIGHTING				
LIGHTING	2#12+1#12G IN 3/4"	300	300	20	1	3	4	20	1	400	2#12+1#12G IN 3/4"	LIGHTING			
LIGHTING	2#12+1#12G IN 3/4"	300	20	1	5	6	20	1	240	2#12+1#12G IN 3/4"	LIGHTING				
LIGHTING	2#12+1#12G IN 3/4"	340	20	1	7	8	20	1	400	2#12+1#12G IN 3/4"	LIGHTING				
LIGHTING	2#12+1#12G IN 3/4"	1200	20	1	9	10	20	1	1000	2#12+1#12G IN 3/4"	LIGHTING				
LIGHTING	2#12+1#12G IN 3/4"	600	1000	20	1	11	12	20	1	800	2#12+1#12G IN 3/4"	RECEPTACLES			
RECEPTACLE	2#12+1#12G IN 3/4"	600	20	1	13	14	20	1	600	2#12+1#12G IN 3/4"	RECEPTACLES				
RECEPTACLE	2#12+1#12G IN 3/4"	600	1000	20	1	15	16	20	1	1200	2#12+1#12G IN 3/4"	RECEPTACLES			
RECEPTACLE	2#12+1#12G IN 3/4"	600	20	1	17	18	20	1	1400	2#12+1#12G IN 3/4"	RECEPTACLES				
RECEPTACLE	2#12+1#12G IN 3/4"	1200	20	1	19	20	20	1	600	2#12+1#12G IN 3/4"	RECEPTACLES				
RECEPTACLE	2#12+1#12G IN 3/4"	1600	20	1	21	22	20	1	400	2#12+1#12G IN 3/4"	RECEPTACLES (ELEVATOR)				
RECEPTACLE	2#12+1#12G IN 3/4"	1000	20	1	23	24	20	1	150	2#12+1#12G IN 3/4"	CAR LIGHTING				
ELECTRIC WATER HEATER (NOTE #1)	2#8+1#10G IN 3/4"	1300	40	1	25	26	30	1	2300	2#10+1#10G IN 3/4"	EQUIPMENT (NOTE #1)				
ELECTRIC WATER HEATER (NOTE #1)	2#8+1#10G IN 3/4"	1300	1300	40	1	27	28	30	1	2300	2#10+1#10G IN 3/4"	EQUIPMENT (NOTE #1)			
ELECTRIC WATER HEATER (NOTE #1)	2#8+1#10G IN 3/4"	1300	40	1	29	30	30	1	2300	2#10+1#10G IN 3/4"	EQUIPMENT (NOTE #1)				
SPARE	20	20	1	31	32	20	1				SPARE				
SPARE	20	20	1	33	34	20	1				SPARE				
SPARE	20	20	1	35	36	20	1				SPARE				
SPARE	20	20	1	37	38	20	1				SPARE				
SPARE	20	20	1	39	40	20	1				SPARE				
SPARE	20	20	1	41	42	20	1				SPARE				
VOLT-AMPERES TOTAL: BUS A: 7200 BUS B: 6140 (ODD)												DEMAND FACTOR 1.0		28	
8580		5850		(EVEN)								116			
SUBTOTALS: 15780		11990		TOTAL OF 28		KVA		LINE AMPS TOTAL =							
NOTE #1: COORDINATE EQUIPMENT INFORMATION WITH MECHANICAL CONTRACTOR AND VENDOR BEFORE INSTALLING BREAKER, CONDUIT, OR WIRE.															

PANELBOARD IDENTIFICATION: EP3

NEW PANEL

LOCATION: REFER TO PLANS

MAINMLOBUS 200A

PROTECTIVE DEVICES: 42000 RMS SYMMETRICAL AIC MINIMUM

MOUNTING SURFACE OR RECESSED

VOLTS 240 /120V

PHASE 1

WIRE 3

DESCRIPTION	WIRE & CONDUIT SIZE (INCH)	VOLT-AMP		BREAKER		CIR / POLE		CIR / POLE		BREAKER		VOLT-AMP		WIRE & CONDUIT SIZE (INCH)	DESCRIPTION
		A	B	AMP	POLE	#		#	AMP	POLE	A	B			
LIGHTING	2#12+1#12G IN 3/4"C	1500		20	1	1		2	20	1	300		2#12+1#12G IN 3/4"C	LIGHTING	
RECEPTACLE	2#12+1#12G IN 3/4"C		800	20	1	3		4	20	1	700		2#12+1#12G IN 3/4"C	RECEPTACLES	
RECEPTACLE	2#12+1#12G IN 3/4"C	500		20	1	5		6	60	1	3500		2#12+1#12G IN 3/4"C	MECHANICAL EQUIPMENT (NOTE #1)	
ELECTRIC WATER HEATER (NOTE #1)	2#8+1#10G IN 3/4"C		2500	40	1	7		8	60	1	3500	3500	2#12+1#12G IN 3/4"C	MECHANICAL EQUIPMENT (NOTE #1)	
SPARE				20	1	9		10	60	1	3500		2#12+1#12G IN 3/4"C	MECHANICAL EQUIPMENT (NOTE #1)	
SPARE				20	1	11		12	20	1				SPARE	
SPARE				20	1	13		14	20	1				SPARE	
SPARE				20	1	15		16	20	1				SPARE	
SPARE				20	1	17		18	20	1				SPARE	
SPARE				20	1	19		20	20	1				SPARE	
SPARE				20	1	21		22	20	1				SPARE	
SPARE				20	1	23		24	20	1				SPARE	
SPARE				40	1	25		26	20	1				SPARE	
SPARE				40	1	27		28	20	1				SPARE	
SPARE				20	1	29		30	20	1				SPARE	
SPARE				20	1	31		32	20	1				SPARE	
SPARE				20	1	33		34	20	1				SPARE	
SPARE				20	1	35		36	20	1				SPARE	
SPARE				20	1	37		38	20	1				SPARE	
SPARE				20	1	39		40	20	1				SPARE	
SPARE				20	1	41		42	20	1				SPARE	

VOLT-AMPERES

TOTAL: BUS A: 2000 BUS B: 3300 (ODD)

73004200(EVEN)

DEMAND FACTOR 1.0

17

SUBTOTALS: 93007500TOTAL OF 17 KVA


LINE AMPS TOTAL =

70

NOTE #1: COORDINATE EQUIPMENT INFORMATION WITH MECHANICAL CONTRACTOR AND VENDOR BEFORE INSTALLING BREAKER, CONDUIT, OR WIRE.


SINGLE LINE DIAGRAM GENERAL NOTES:

- A. ALL ELECTRICAL SERVICE ENTRANCE EQUIPMENT SHALL BE NEMA-3R RATED IF INSTALLED OUTDOORS.
- B. ALL ELECTRICAL EQUIPMENT AND WIRE RATED @ 75°C CONTINUOUS DUTY.
- C. PRIOR TO CONSTRUCTION, THE ELECTRICAL CONTRACTOR SHALL:
- a. VERIFY ALL EXISTING CONDITIONS IN FIELD PRIOR TO CONSTRUCTION.
- b. COORDINATE THE ELECTRICAL SERVICE WITH UTILITY COMPANY REPRESENTATIVE.
- c. NOTIFY THE ENGINEER OF ANY CHANGES REQUIRED TO COMPLETE NEW CONSTRUCTION.
- D. ANY NEW ELECTRICAL SERVICE EQUIPMENT SHALL MATCH EXISTING A.I.C. RATING.
- E. OVERCURRENT DEVICES OF ENTIRE DISTRIBUTION SYSTEM SHALL MEET STATED FAULT CURRENT VALUES WITH FULLY RATED EQUIPMENT. REFER TO PANEL SCHEDULES FOR ADDITIONAL REQUIREMENTS.
- F. WHERE A DISCREPANCY EXISTS BETWEEN EQUIPMENT ON THE SINGLE LINE DIAGRAM AND THE DETAILED SCHEDULES, THE ITEM OR ARRANGEMENT WITH BETTER QUALITY, GREATER QUANTITY, OR HIGHER COST SHALL BE USED.
- G. ALL DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- H. REFER TO SINGLE CONDUCTOR FEEDER AND BRANCH CIRCUIT SCHEDULE ON SHEET THIS SHEET FOR WIRE SIZES WHERE NOT INDICATED. ELECTRICAL CONTRACTOR SHALL SIZE ALL WIRES THAT ARE NOT INDICATED PER C.E.C.
- I. ELECTRICAL CONTRACTOR SHALL CONFIRM EXACT FAULT CONTRIBUTION WITH UTILITY COMPANY AND ALL EQUIPMENT RATING SHALL EXCEED FAULT CURRENT PROVIDED BY UTILITY.

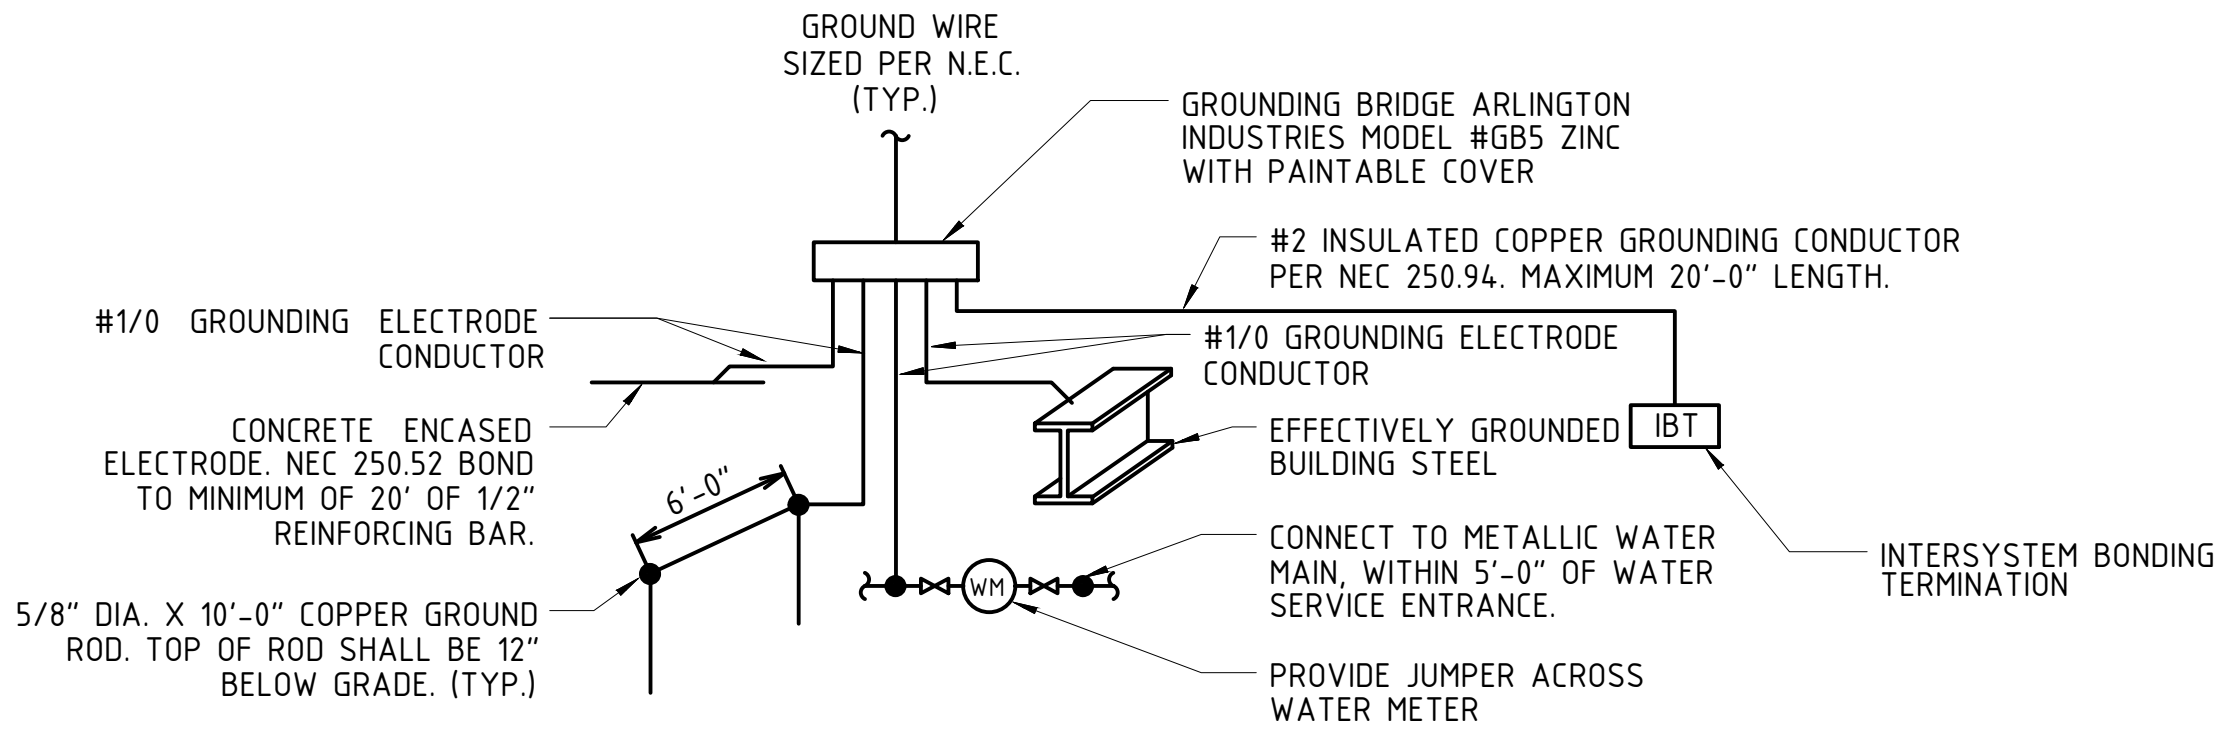

EL 07 SCALE NTS

EL 06 SCALE NTS

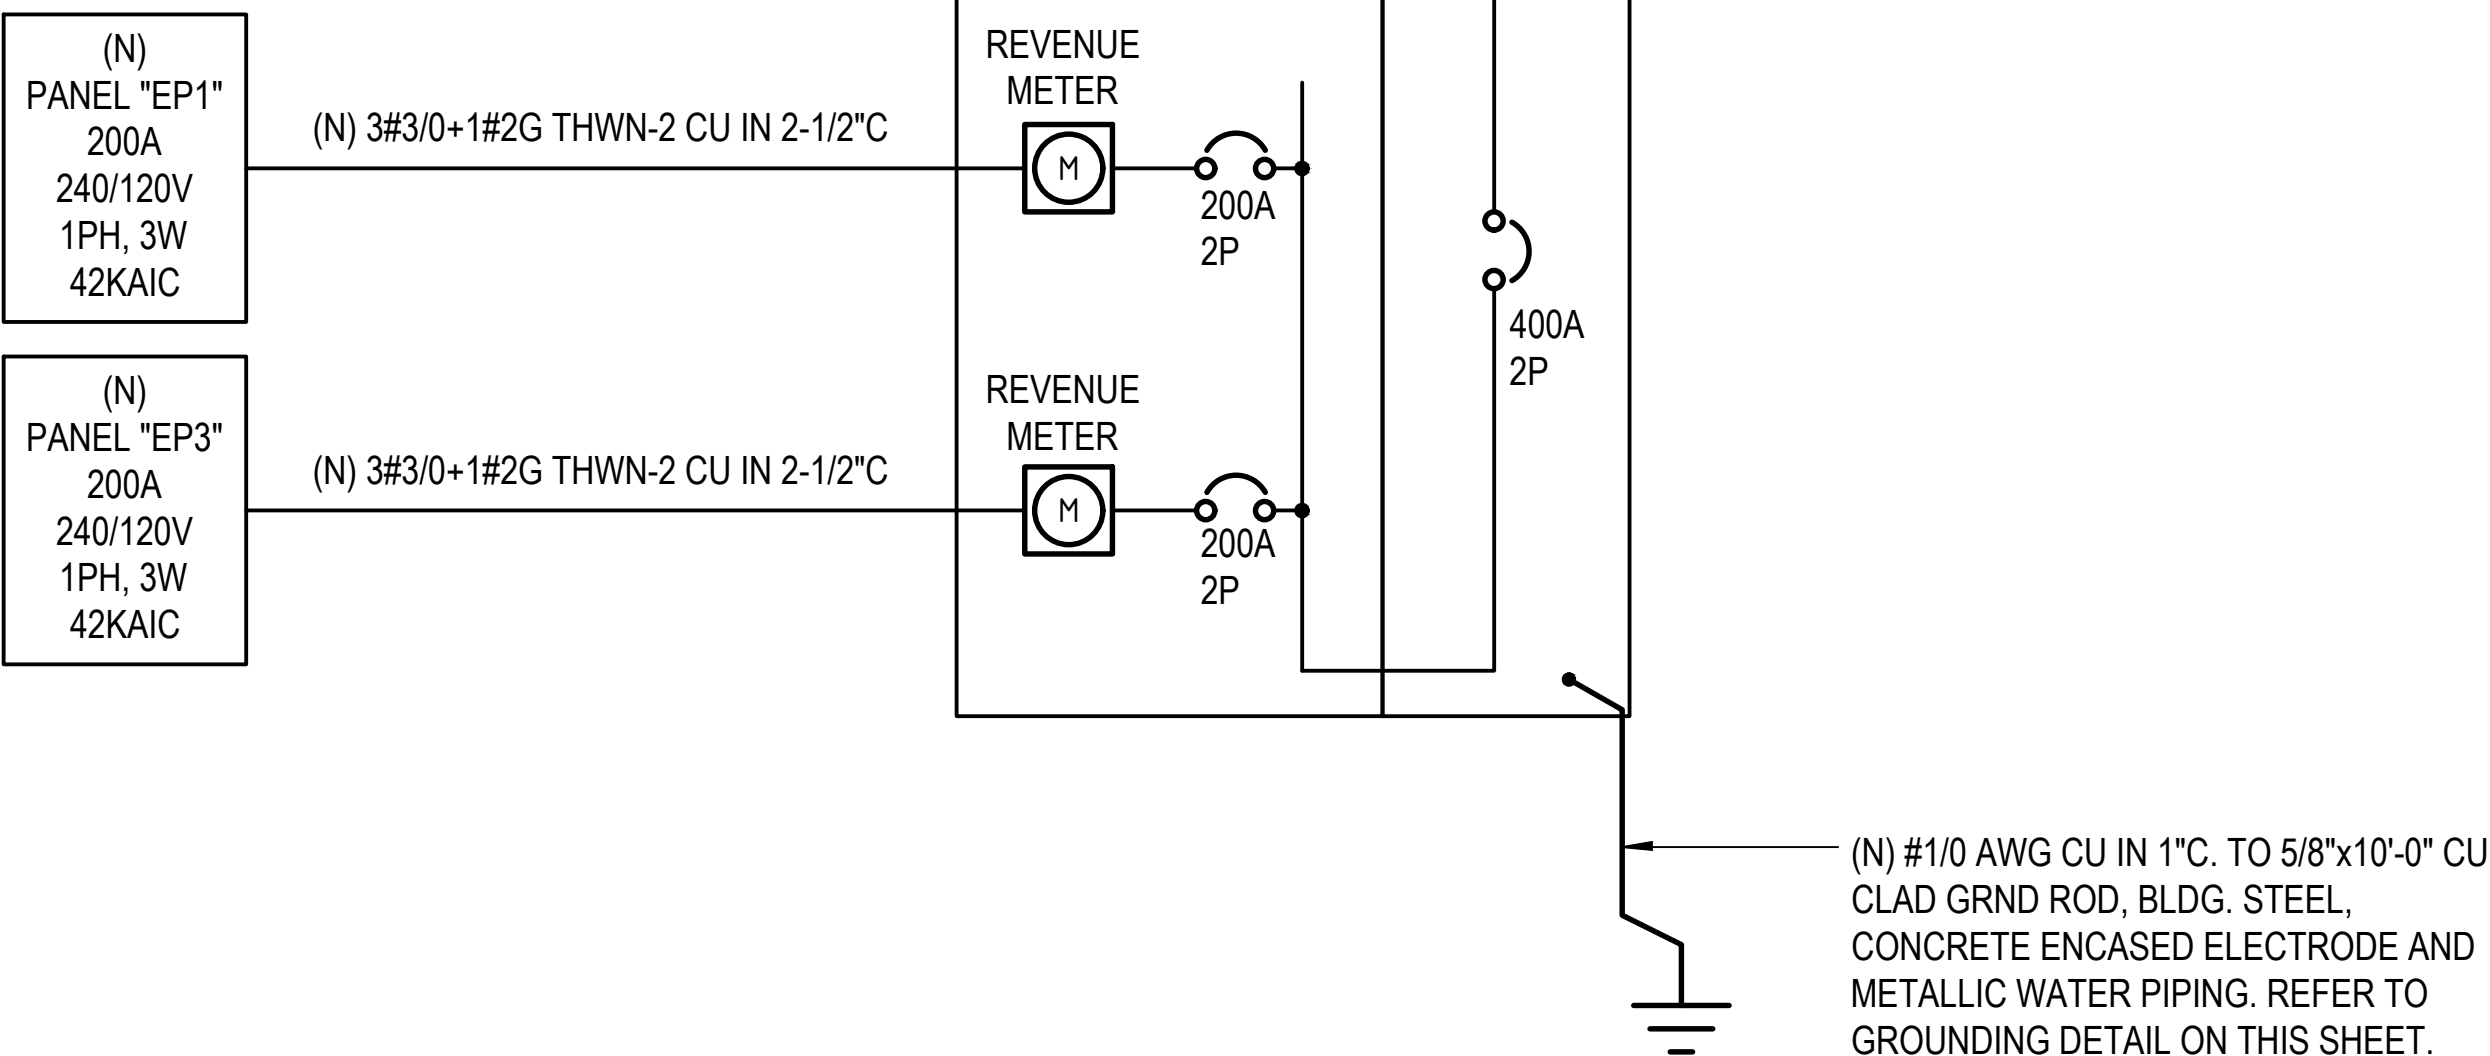

ELECTRICAL ONLY
ELC ELECTRICAL CONSULTING

PROFESSIONAL ENGINEER
ALEXSEI ISEK
E 23717
EXP: 12/31/25
ELECTRICAL
STATE OF CALIFORNIA

Unauthorized use of a PE stamp is an illegal act.

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	11-09-2023	ISSUED FOR PERMIT	A.I.
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM


DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
ELECTRICAL


PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
PANEL SCHEDULE &
SINGLE LINE DIAGRAM

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO EL-06	SCALE: NTS

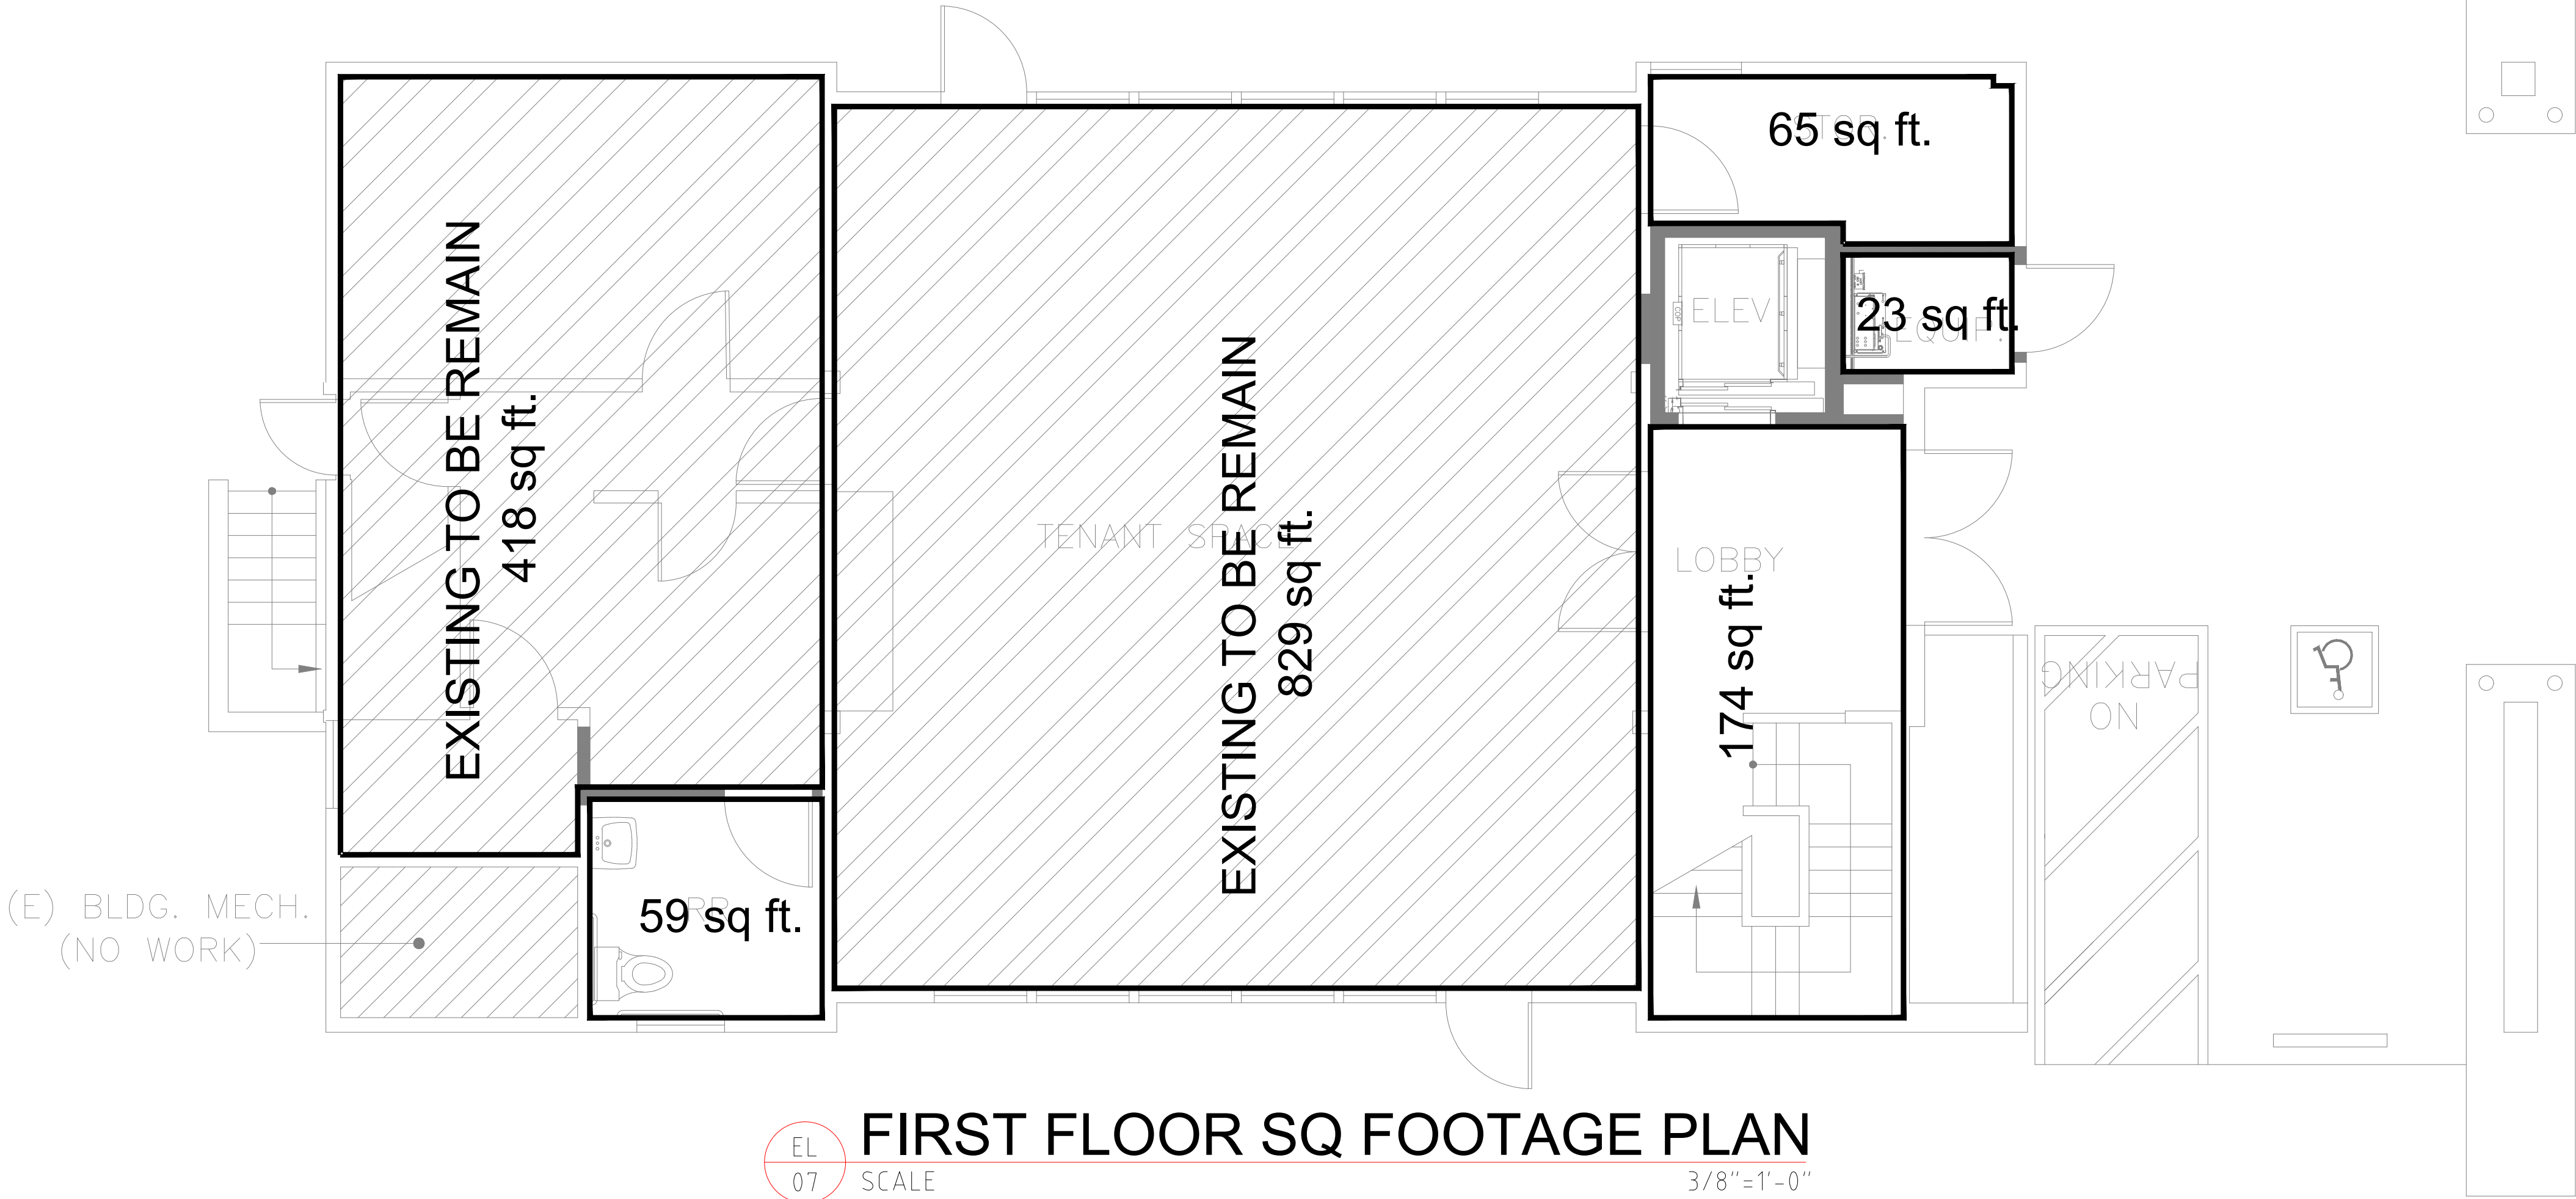

OWNER SIGNATURE

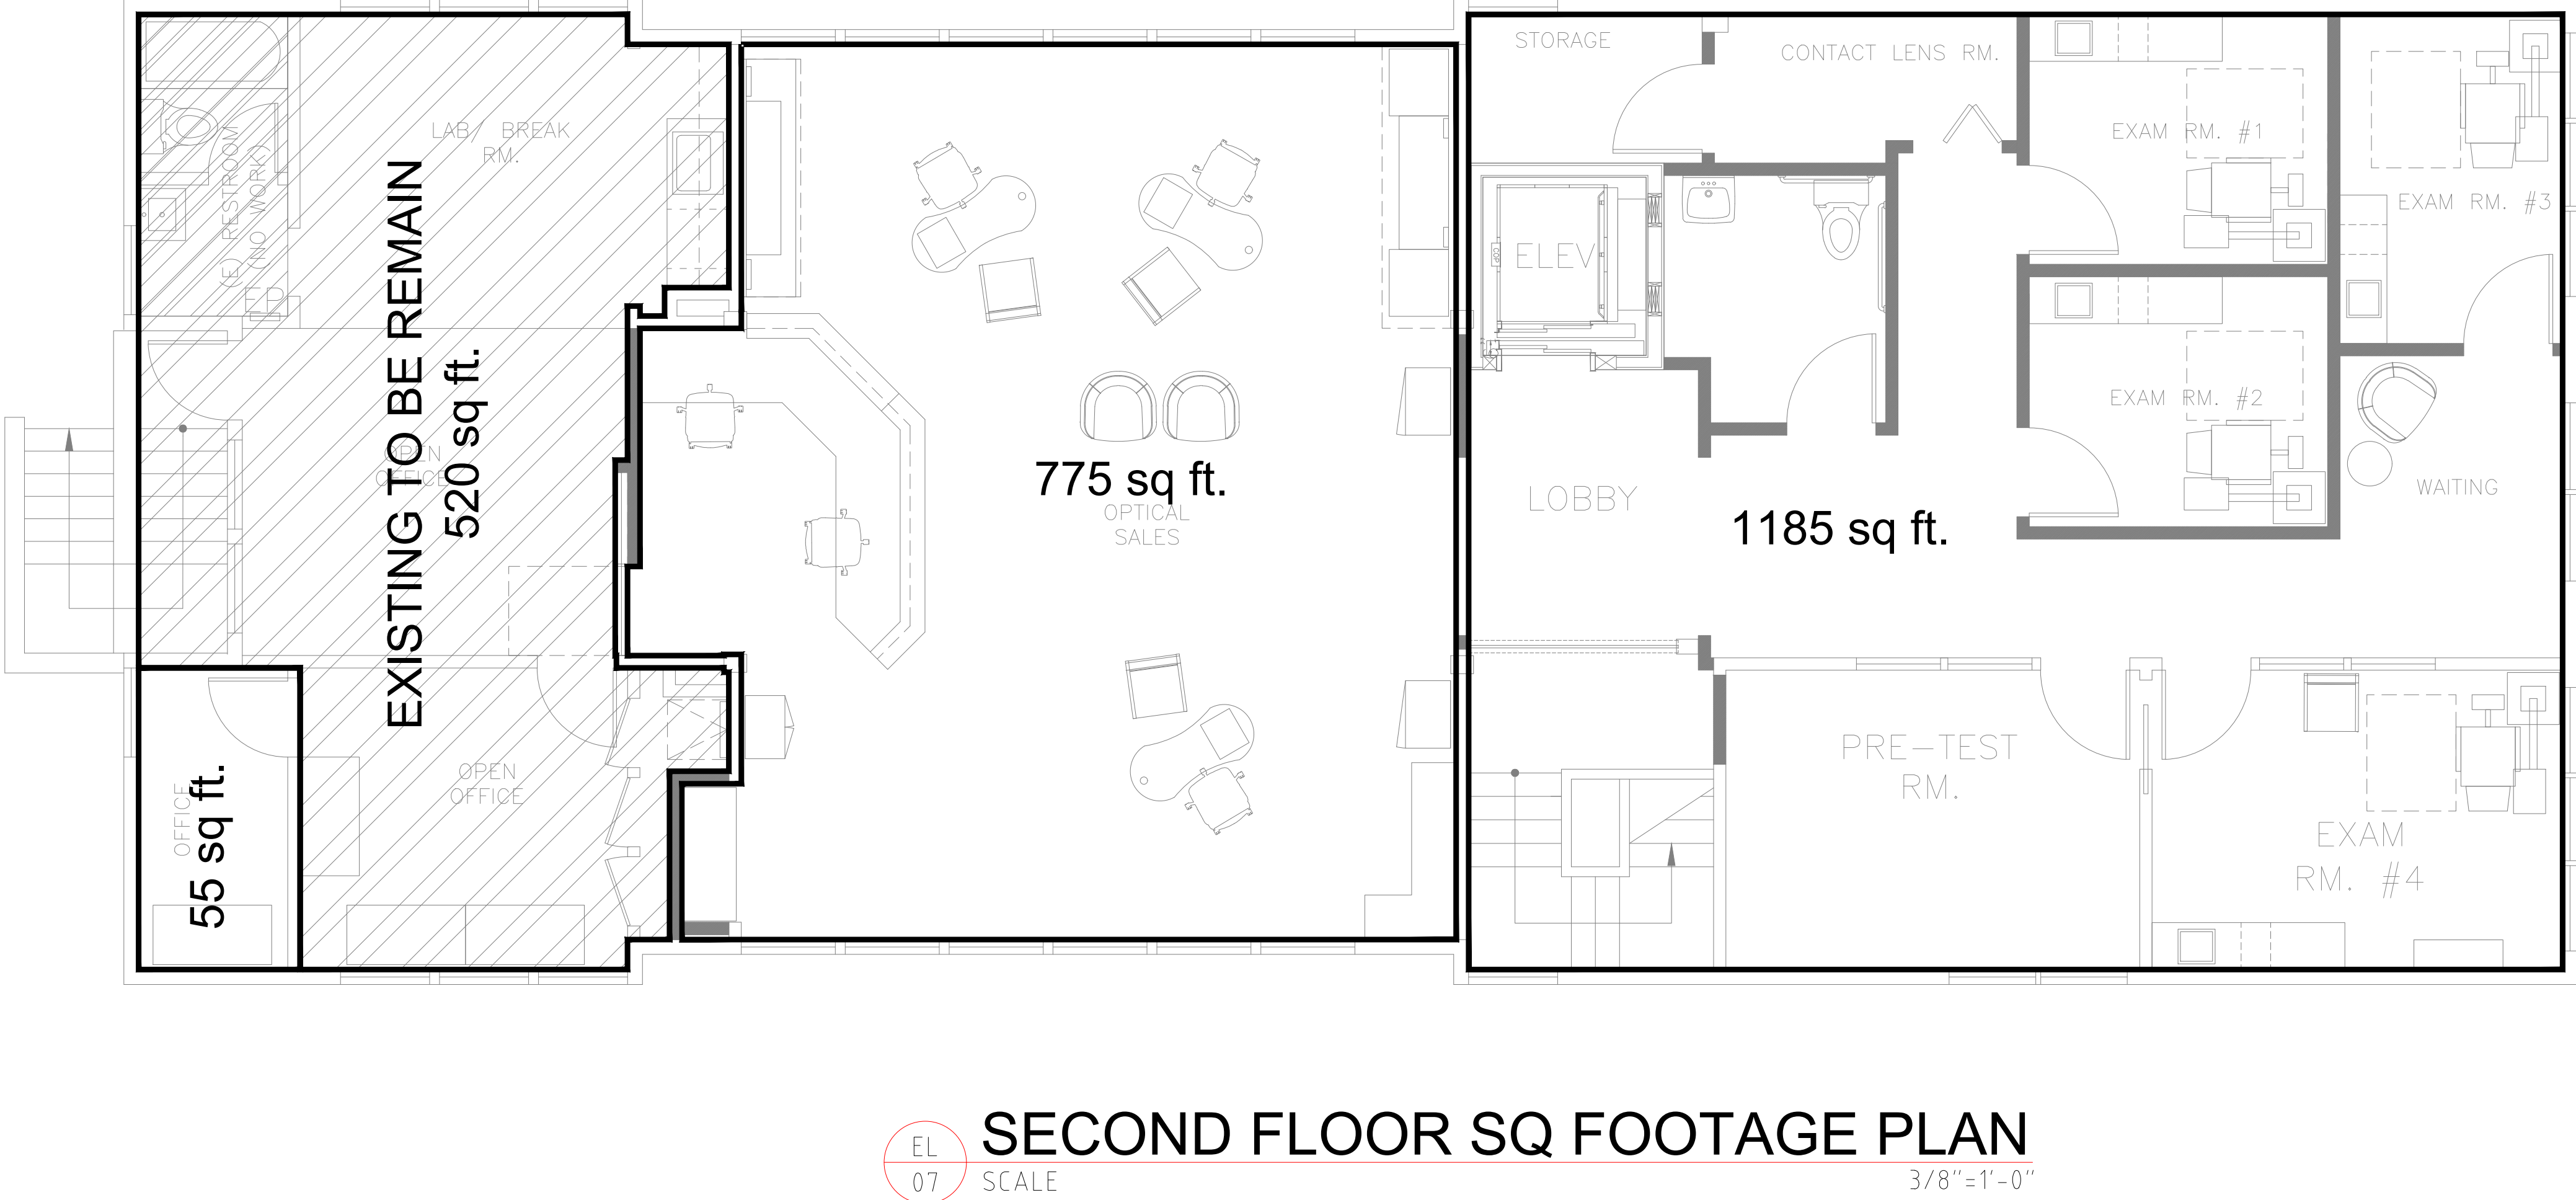

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
ELECTRICAL

PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
FIRST & SECOND FLOOR
SQ FOOTAGE PLANS

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO EL-07	SCALE: 3/8"=1'-0"

GENERAL PLUMBING NOTES:

1. LOCATION AND SIZES OF ALL EXISTING SERVICES ARE APPROXIMATE. VERIFY ALL UTILITIES PRIOR TO COMMENCING WORK.
2. FOR EXACT LOCATION OF PLUMBING FIXTURES, DRAINS AND EQUIPMENT SEE ARCHITECTURAL DRAWINGS.
3. ALL DOMESTIC WATER AND VENT PIPING SHOWN TO BE RUN ABOVE CEILING UNLESS OTHERWISE NOTED.
4. ALL SANITARY PIPING SHOWN TO BE RUN BELOW FLOOR UNLESS OTHERWISE NOTED.
5. ENTIRE INSTALLATION INCLUDING MATERIALS, EQUIPMENT AND WORKMANSHIP SHALL CONFIRM WITH ALL APPLICABLE LAWS, CODES AND REGULATIONS OF MUNICIPAL, STATE AND FEDERAL AUTHORITIES, ALSO THE PLUMBING CODE 2004, INTERNATIONAL BUILDING CODE 2009, AND OTHER REGULATORY BODIES HAVING JURISDICTION OVER THE CLASS OF WORK.
6. THE CONTRACTOR SHALL MAKE TESTS FOR ACCEPTANCE AND APPROVAL AS REQUIRED BY THE CODE. REQUIRED TESTS SHALL BE PERFORMED IN THE PRESENCE OF OWNER’S REPRESENTATIVE UNLESS WAIVED IN WRITING.
7. THE CONTRACTOR SHALL FIELD COORDINATE THE WORK WITH THAT OF ALL OTHER TRADES.
8. ALL DOMESTIC WATER PIPING SHALL BE INSULATED AS REQUIRED.
9. DOMESTIC WATER PIPING MATERIAL: ASTM B88 TYPE L OR M COPPER TUBE WITH WROUGHT OR ABS FITTINGS AND LEAD–FREE SOLDERED JOINTS. INSTALL DOMESTIC WATER PIPING LEVEL WITHOUT PITCH AND PLUMB.
- DRAIN, WASTE, STORM, AND VENT PIPING MATERIAL: FOR BELOW GROUND SOIL, WASTE AND BENT PIPING SHOULD BE SERVICE WEIGHT HUB AND SPIGOT ABS CONFORMING TO ASTM A74, WITH LEAD AND OAKUM JOINTS AS ALLOWED BY PLUMBING CODE; FOR ABOVE GROUND SOIL, WASTE AND VENT PIPING SHOULD BE HUBLESS ABS
10. ANY ITEM OF MATERIALS NOT INDICATED ON THE DRAWINGS OR NOT SPECIFIED AND WHICH ARE REQUIRED FOR THE COMPLETE INSTALLATION OF ANY PART OF THE WORK DESCRIBED, SHALL BE FURNISHED AS CODE REQUIRED.
11. INSTALL CLEANOUT AT OR NEAR THE BOTTOM OF SANITARY/WASTE STACK.
12. PROVIDE PROPER ACCESS PANELS AS SPECIFIED IN WALLS AND CEILINGS FOR ANY EQUIPMENT, DEVICES, VALVES, SHOCK ABSORBERS, TRAP PRIMERS, CLEANOUTS ETC. REQUIRING ACCESS.

PLUMBING FIXTURE AND FAUCETS REFERENCED STANDARDS		
MARK	DESCRIPTION	STANDARD
WC-1	WATER CLOSET	WATER CLOSETS SHALL CONFIRM TO THE WATER CONSUMPTION REQUIREMENTS OF SECTION 604.4 AND SHALL CONFIRM TO ANSI Z124.4. ASME A112.19.2M, CSA B45.1, CSA B45.4 OR CSA B45.5. WATER CLOSETS SHALL CONFIRM TO THE HYDRAULIC PERFORMANCE REQUIREMENTS OF ASME A112.19.19.9M, CSA B45.1, CSA B45.4 OR CSA B45.5. ELECTRO HYDRAULIC WATER CLOSETS SHALL COMPLY WITH ASME A112.19.13.
L-1	LAVATORY	LAVATORIES SHALL CONFIRM TO ANSI Z124.3. ASME A112.19.1M, ASME A112.19.2M, ASME A112.19.3M, ASME A112.19.4M, ASME A112.19.9M, CSA B45.2, CSA B45.3, CSA B45.4, ROUP WASH UP EQUIPMENT SHALL CONFIRM TO THE REQUIREMENTS OF SECTION 402. EVERY 20 INCHES (608MM) OF RIM SPACE SHALL BE CONSIDERED AS ONE LAVATORY.
KS-1	KITCHEN SINK	SINKS SHALL CONFIRM TO ANSI Z124.6, ASME A112.19.1M, ASME A112.19.2M, ASME A112.19.3M, ASME A112.19.4M, ASME A112.19.9M, CSA B45.1, CSA B45.2, CSA B45.3, OR CSA B45.4,
	FAUCETS AND FIXTURE FITTINGS	FAUCETS AND FIXTURE FITTINGS SHALL CONFORM TO ASME A112.18.1 OR CSA B125. FAUCETS AND FIXTURE FITTINGS THAT SUPPLY DRINKING WATER FOR HUMAN INGESTION SHALL CONFORM TO THE REQUIREMENTS OF NSF 61, SECTION 9. FLEXIBLE WATER CONNECTORS EXPOSED TO CONTINUOUS PRESSURE SHALL CONFORM TO THE REQUIREMENTS OF SECTION 605.6 HAND HELD SHOWERS SHALL CONFORM TO ASSE 1014 OR CSA B125. SHOWER AND TUB SHOWER COMBINATION VALVES SHALL BE BALANCED PRESSURE, THERMOSTATIC OR COMBINATION BALANCED PRESSURE/THERMOSTATIC VALVES THAT CONFORM TO THE REQUIREMENTS OF ASSE 1016 OR CSA B125, MULTIPLE (GANG) SHOWERS SUPPLIED WITH A SINGLE TEMPERED WATER SUPPLY PIPE SHALL HAVE THE WATER SUPPLY FOR SUCH SHOWERS CONTROLLED BY A MASTER THERMOSTATIC MIXING VALVE COMPLYING WITH ASSE 1017. SHOWER AND TUB SHOWER COMBINATION VALVES AND MASTER THERMOSTATIC MIXING VALVES REQUIRED BY THIS SECTION SHALL BE EQUIPPED WITH A MEANS TO LIMIT THE MAXIMUM SETTING OF THE VALVE TO 120°F (49°C), WHICH SHALL BE FIELD ADJUSTED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS. FAUCETS AND FIXTURE FITTINGS WITH HOSE CONNECTED OUTLETS SHALL CONFORM TO ASME A112.18.3M. TEMPERATURE ACTUATED, FLOW REDUCTION DEVICES. WHERE INSTALLED FOR INDIVIDUAL FIXTURE FITTINGS, SHALL CONFORM TO ASSE 1062. SUCH VALVES SHALL NOT BE USED ALONE AS A SUBSTITUTE FOR THE BALANCED PRESSURE. THERMOSTATIC OR COMBINATION SHOWER VALVES REQUIRED IN SECTION 424.3

PLUMBING NOTES:


1. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE NOTED.
2. ALL PLUMBING INSTALLATIONS SHALL CONFIRM WITH THE REQUIREMENTS OF MANUFACTURER RECOMMENDATION AND OR UNIFORM PLUMBING CODE (UPC).
3. ALL PLUMBING MATERIALS SHALL BE AS SPECIFIED IN THE CONTRACT SPECS AND BOQ.
4. ALL PIPE SIZES SHOWN ARE NOMINAL DIAMETER IN INCHES. UNLESS OTHERWISE MENTIONED.
5. INSTALLER SHOULD NOT SCALE THE DRAWING.
6. ALL PIPE PENETRATIONS IN WALL & SLABS SHALL BE THROUGH PIPE SLEEVES.
7. IF ANY ERROR OR OMISSION IS FOUND IN DRAWING THIS OFFICE MAY BE CONSULTED FOR RECTIFICATION.

TABLE 604.4 MAXIMUM FLOW RATES AND CONSUMPTION FOR PLUMBING FIXTURES AND FIXTURE FITTINGS	
PLUMBING FIXTURE	MAXIMUM FLOW RATE
R FIXTURE FITTING	OR QUANTITY b
LAVATORY, PRIVATE	1.5 gpm at 60 psi
SINK FAUCET	1.5 gpm at 60 psi
WATER CLOSET	1.28 GALLONS PER FLUSHING CYCLE
FOR SI: 1 GALLON = 3.785 L, 1 GALLON PER MINUTE = 3.785 L/M, 1 POUND PER SQUARE INCH = 6.895 KPA.	
A. A HAND HELD SHOWER SPRAY IS A SHOWER HEAD. B. CONSUMPTION TOLERANCES SHALL BE DETERMINED FROM REFERENCED STANDARDS. C. WATER FACTOR IN GALLONS PER CYCLE CUBIC FOOT ALL PLUMBING FIXTURES SHALL CONTRIBUTE TO A LEEDS SOLUTION AND SHALL MEET EPA CRITERIA AND BEEN CONSIDERED AS WATER EFFICIENT PRODUCTS AS STIPULATED BY THE LEEDS TA 2009 REFERENCE GUIDE (20% REDUCTION REQUIRED).	
2010 F.B.C PLUMBING AS PER SECTION 604.9 A WATER HAMMER ARRESTOR SHALL BE INSTALLED WHERE QUICK CLOSING VALVES ARE UTILIZED. WATER HAMMER ARRESTORS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS. WATER HAMMER ARRESTORS SHALL CONFORM TO ASSE 1010.	



OWNER SIGNATURE

REVISION STATUS					
Rev	DATE	DESCRIPTION	DRAWN BY		
00	02-07-2023	ISSUED FOR APPROVAL	A.S		
01					
02					
03					
04					
CLIENT/CONSULTANT APPROVAL STATUS					
APPROVED		(A)			
APPROVED WITH NOTES		(B)			
RESUBMIT		(C)			
DISAPPROVED		(D)			
OWNER:					
ADDRESS:					
5207 J STREET SACRAMENTO, CA					
DESIGN CONSULTANT: TSABA CORP NADIF BRACEY 254 CHAPMAN RD, STE 208 #13130 NEWARK, DELAWARE 19702 EMAIL: TS9DESIGNS@GMAIL.COM					
DRAWING STATUS: DESIGN DRAWING					
DISCIPLINE: PLUMBING					
PROJECT TITLE: CROWL BUILDING					
DRAWING TITLE: NOTES					
DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023			
JOB NO 632	SHT NO PL-01	SCALE: NTS			

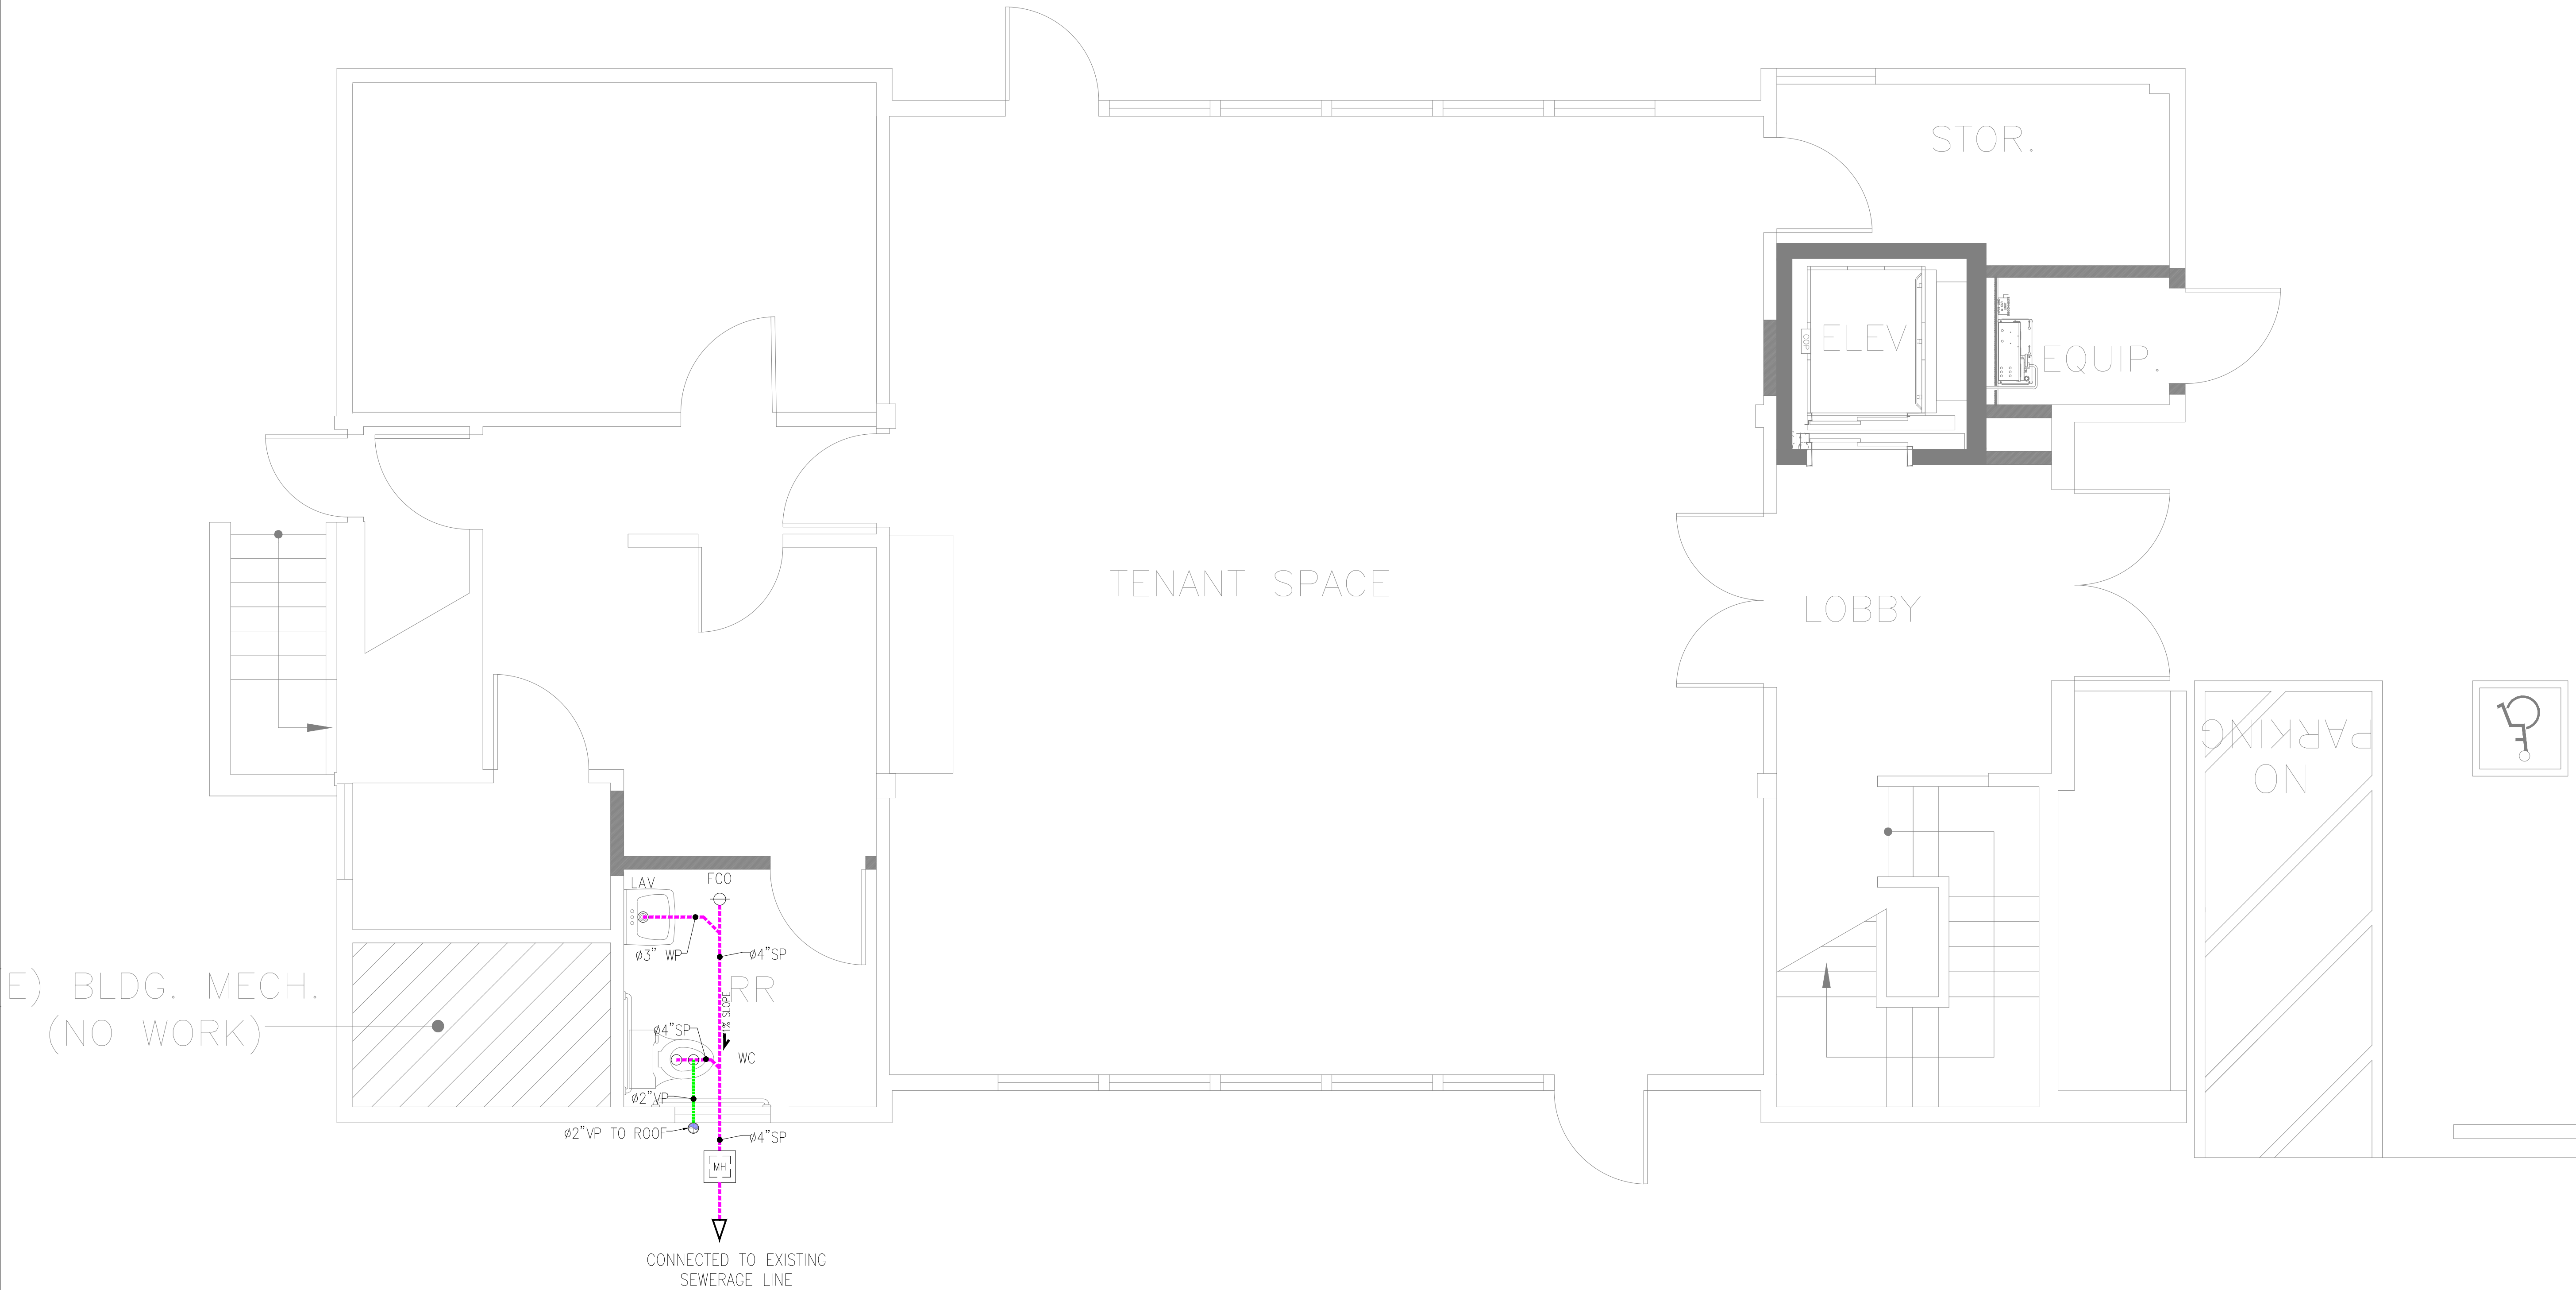

PL 02

SCALE

FIRST FLOOR DRAINAGE PLAN

3/8"=1'-0"

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
PLUMBING


PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
FIRST FLOOR DRAINAGE PLAN

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO PL-02	SCALE: 3/8"=1'-0"



PLUMBING LEGEND:	
SYMBOL	DESCRIPTION
----	HWS — HOT WATER SUPPLY
----	CWS — COLD WATER SUPPLY
----	VP—VENT PIPE
----	SP—SOIL PIPE
----	WP—WASTE PIPE
----	SHUT OFF VALVE
----	GATE VALVE
WH	WATER HEATER
WC	WATER CLOSET
AS	ABLUTION SPRAY
LAV	LAVATORY

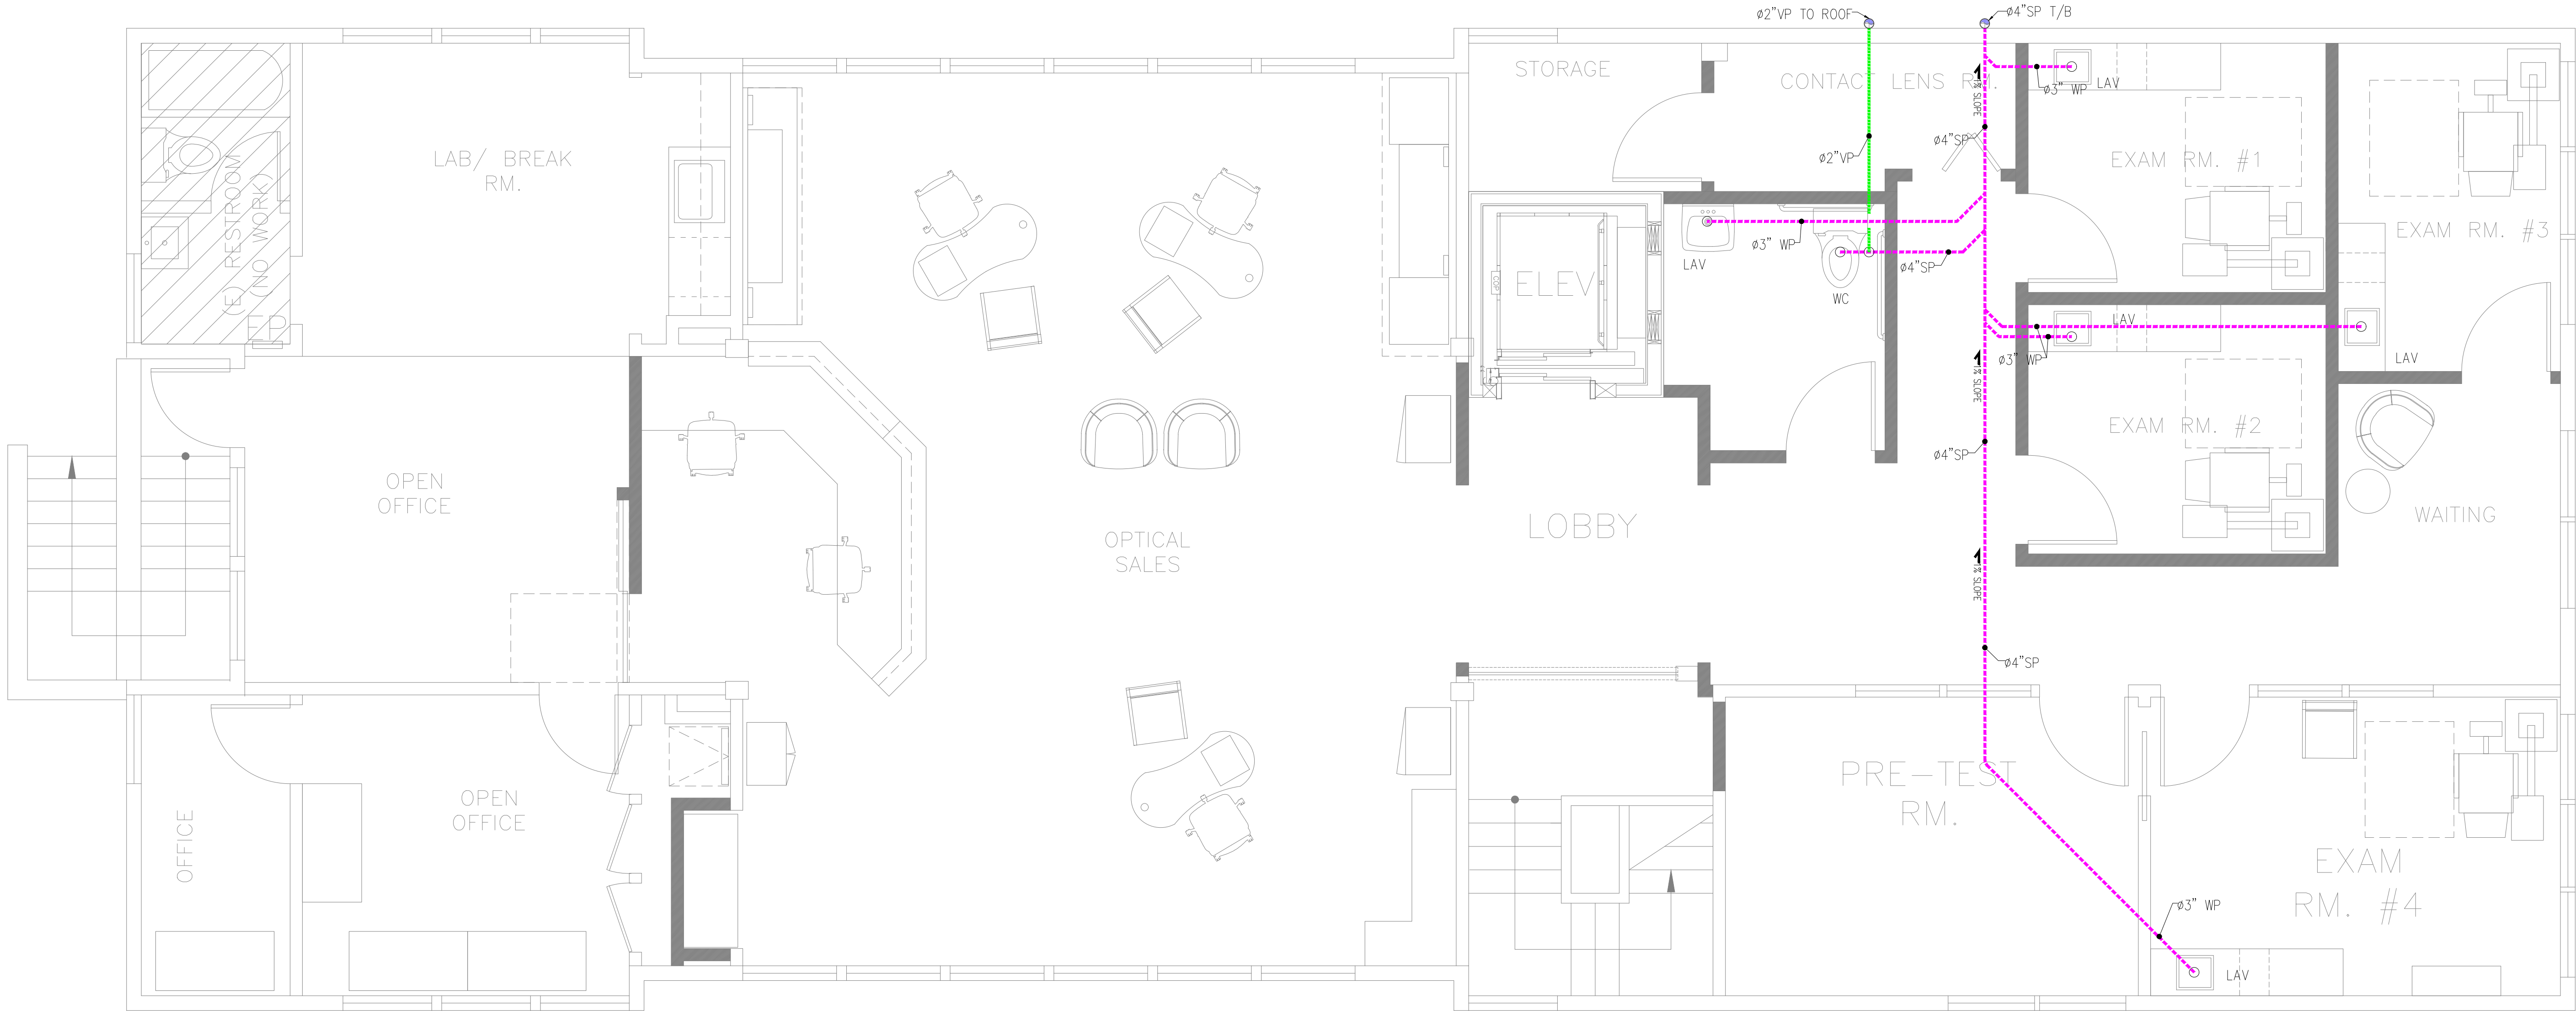

PL
03

SECOND FLOOR DRAINAGE PLAN

SCALE

1/4" = 1'-0"

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

PLUMBING


PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:

SECOND FLOOR DRAINAGE PLAN

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO PL-03	SCALE: 1/4"=1'-0"

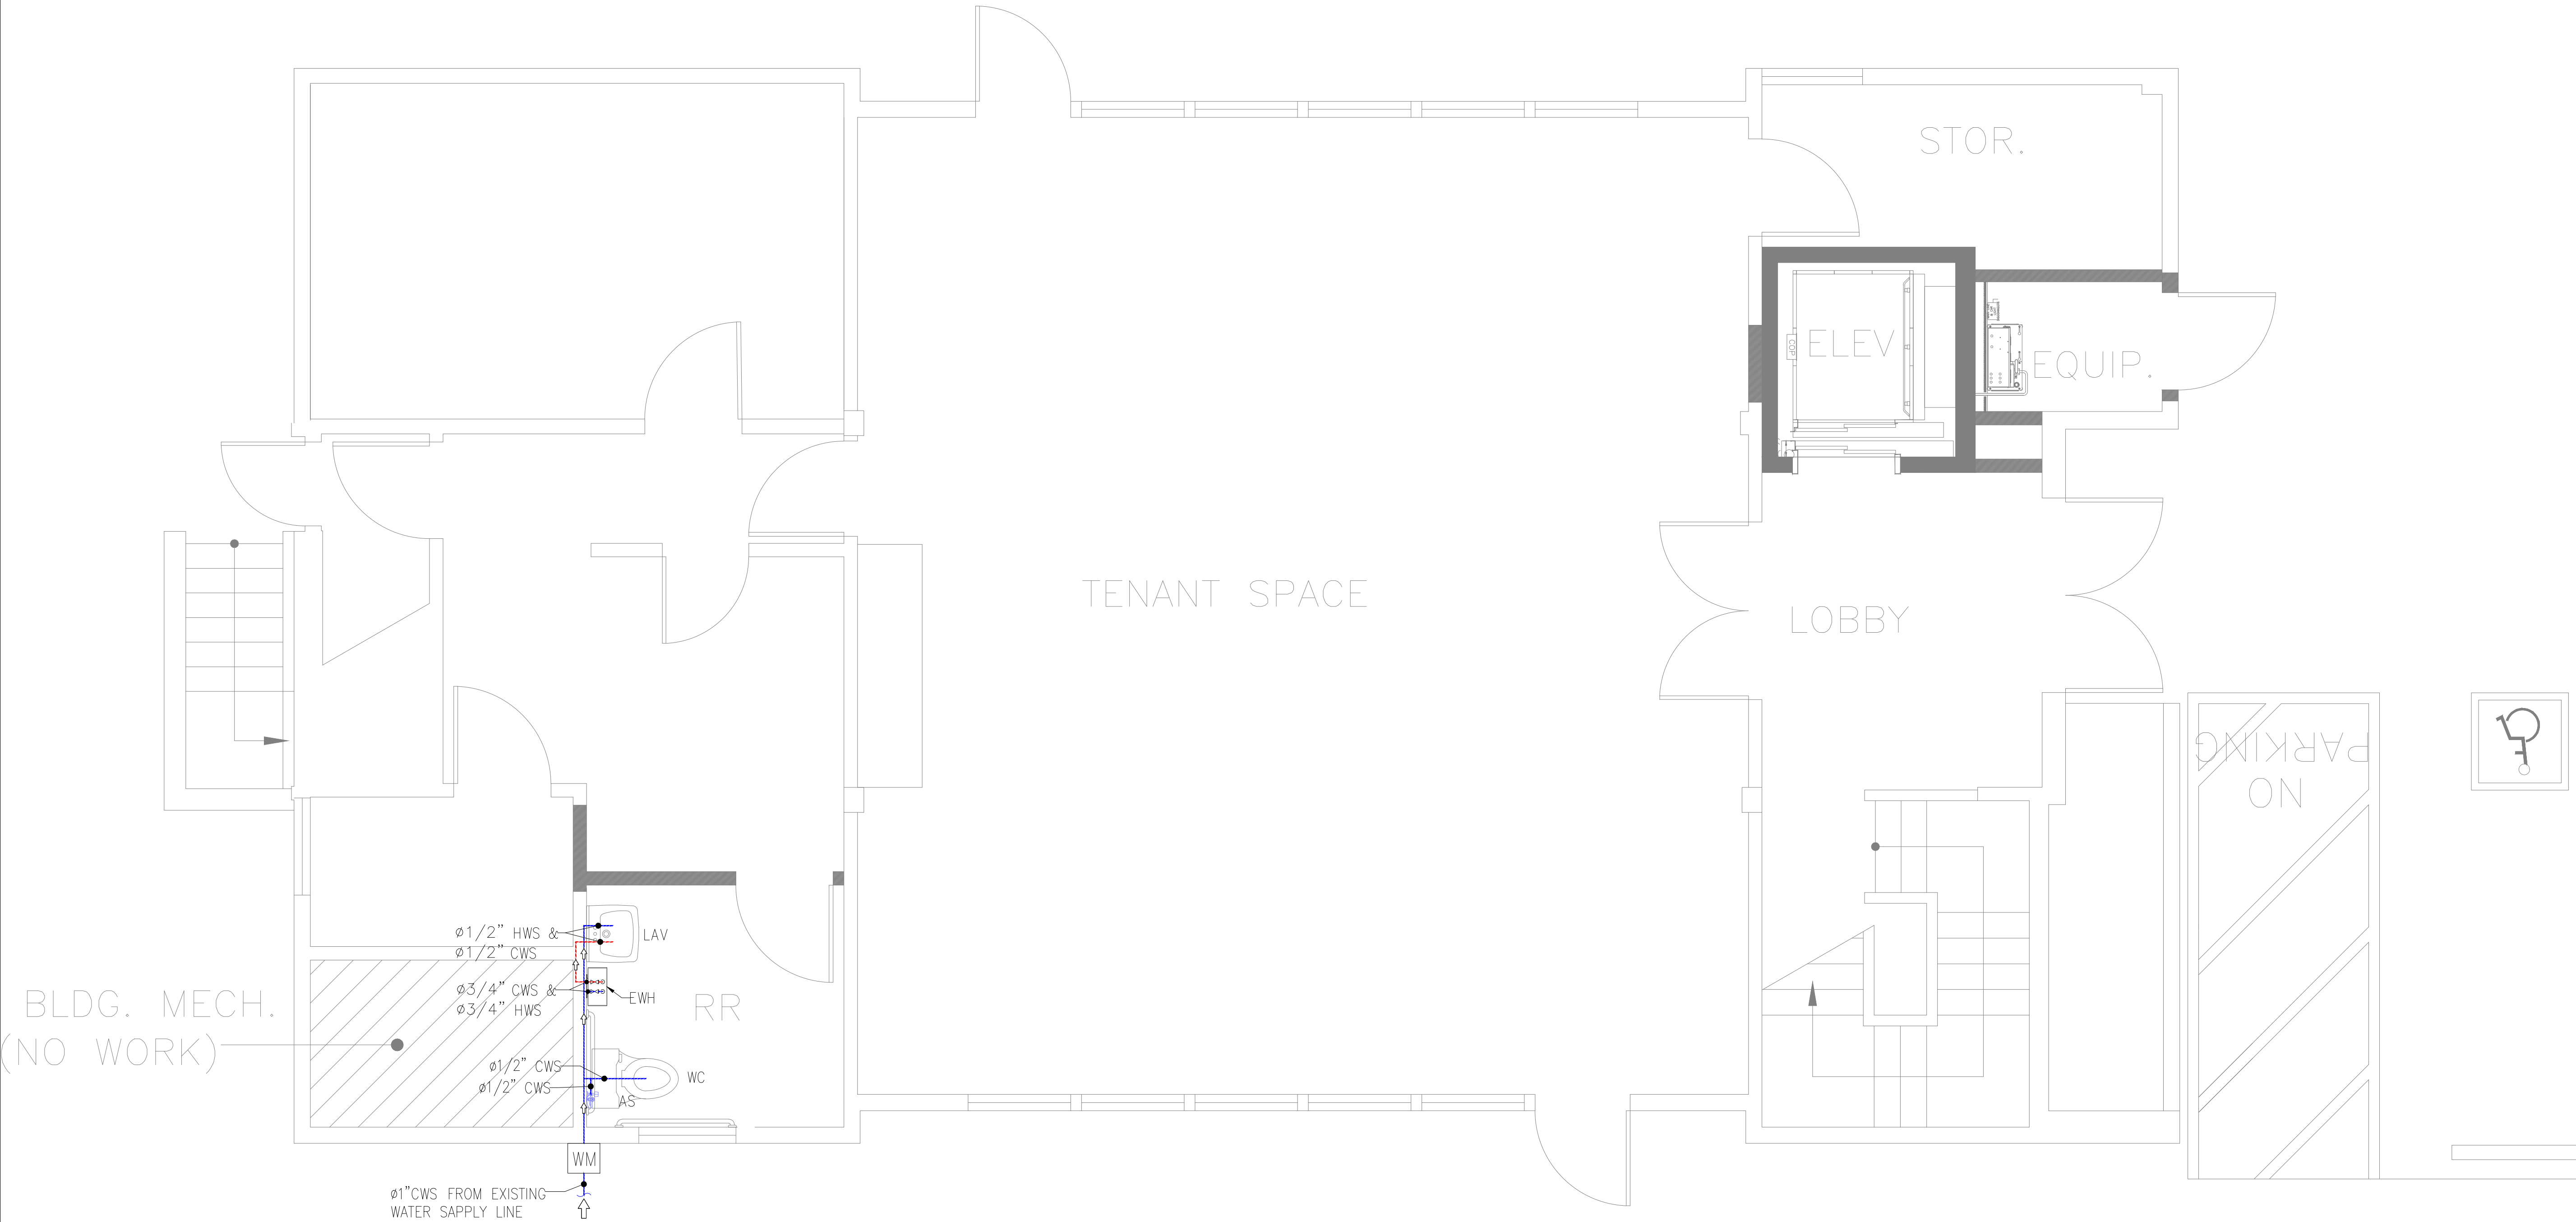

PL
04

FIRST FLOOR WATER SUPPLY PLAN

SCALE

3/8"=1'-0"

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM


DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
PLUMBING

PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
FIRST FLOOR
WATER SUPPLY PLAN

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO PL-04	SCALE: 3/8"=1'-0"

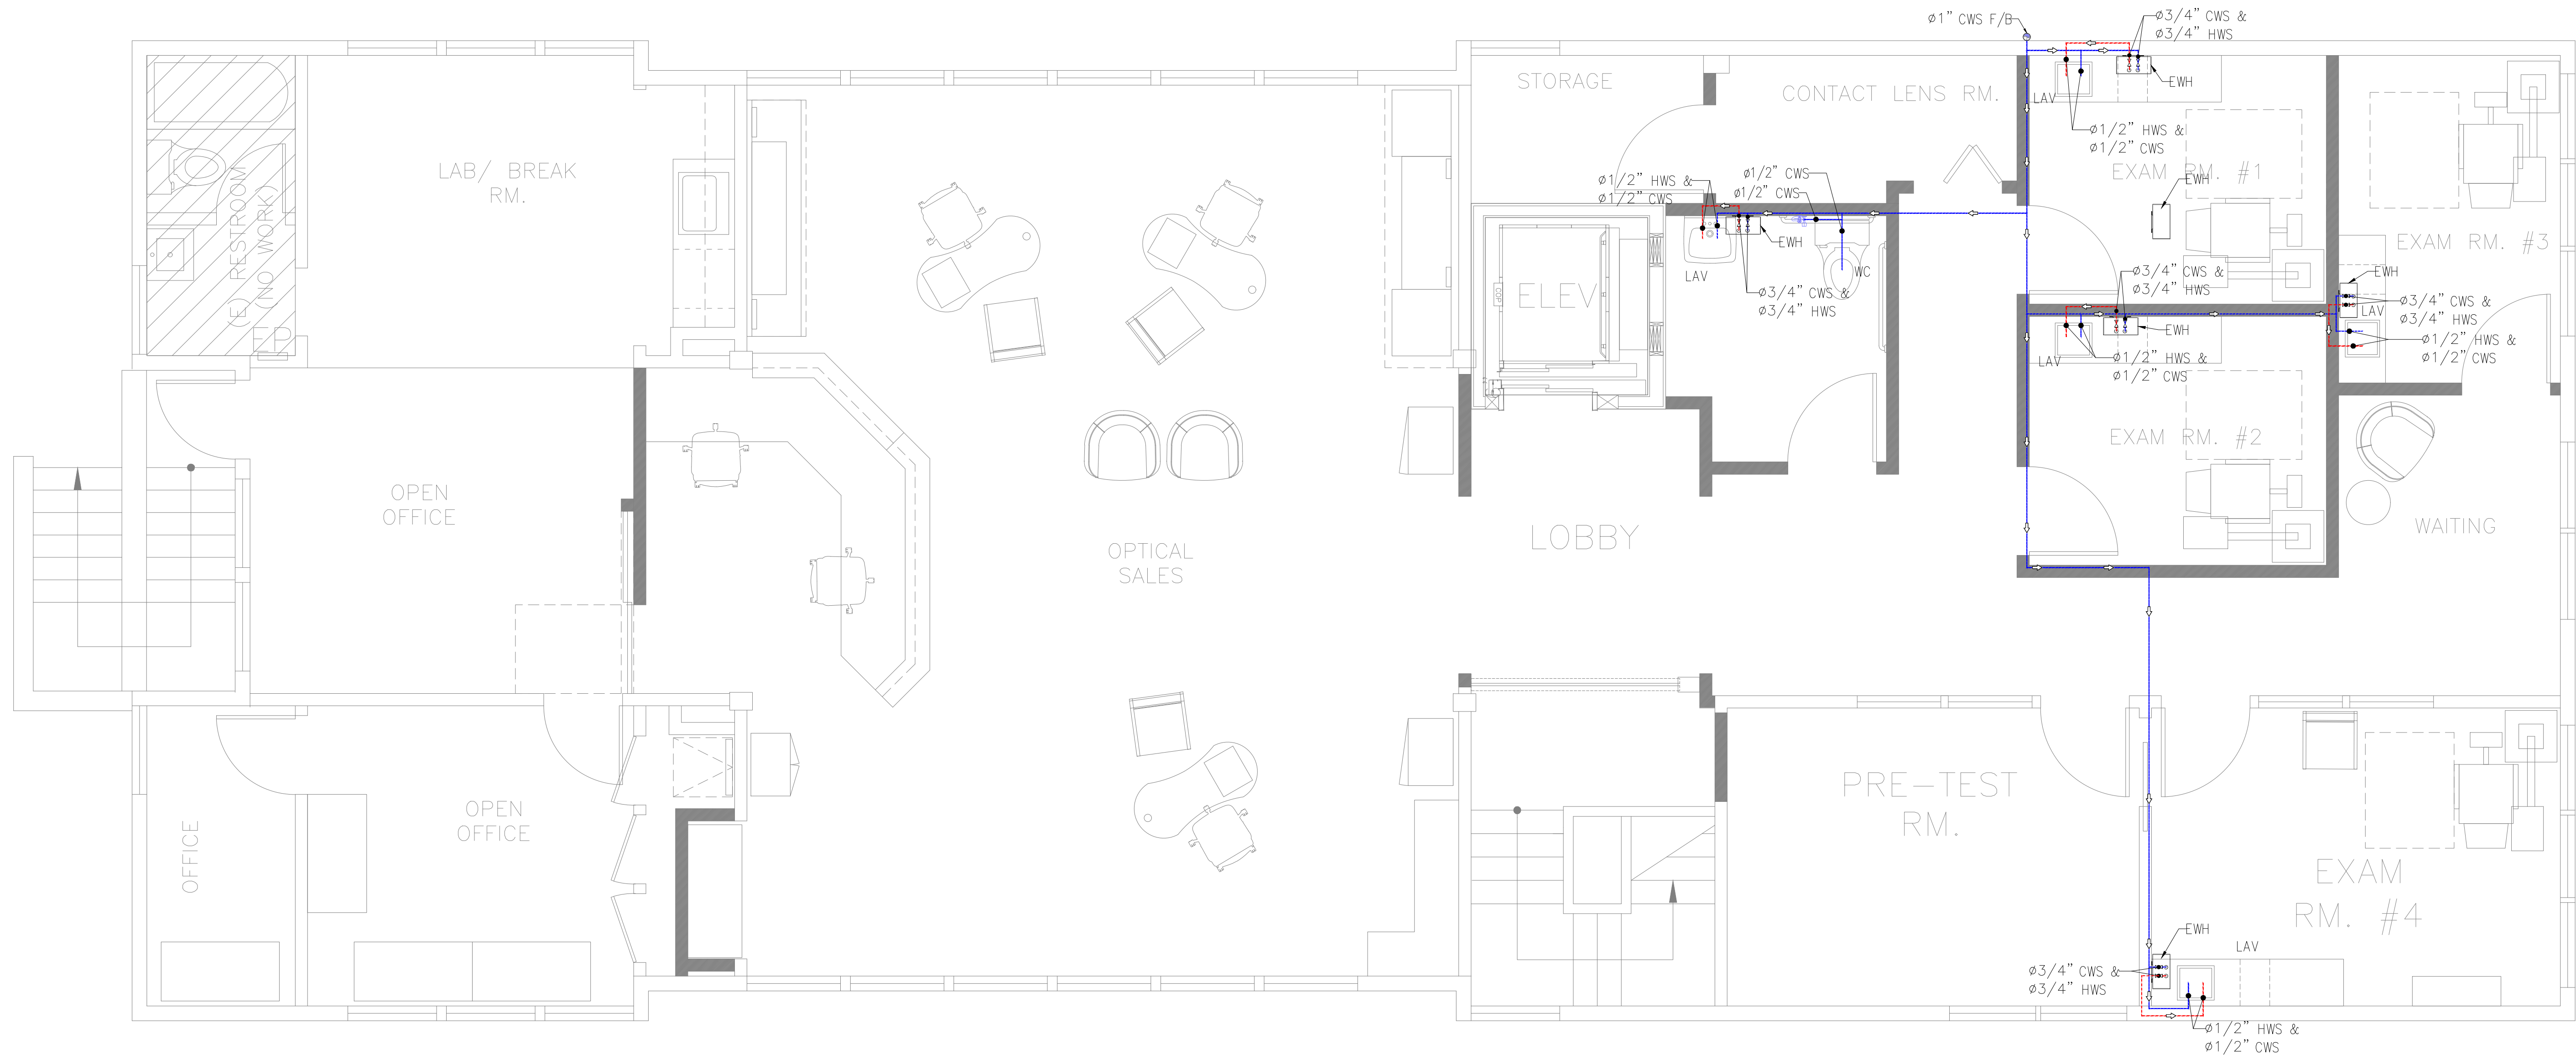

PL
05

SECOND FLOOR WATER SUPPLY PLAN

SCALE

1/4"=1'-0"

OWNER SIGNATURE

REVISION STATUS

Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS

APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

PLUMBING



PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:

SECOND FLOOR
WATER SUPPLY PLAN

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO PL-05	SCALE: 1/4"=1'-0"

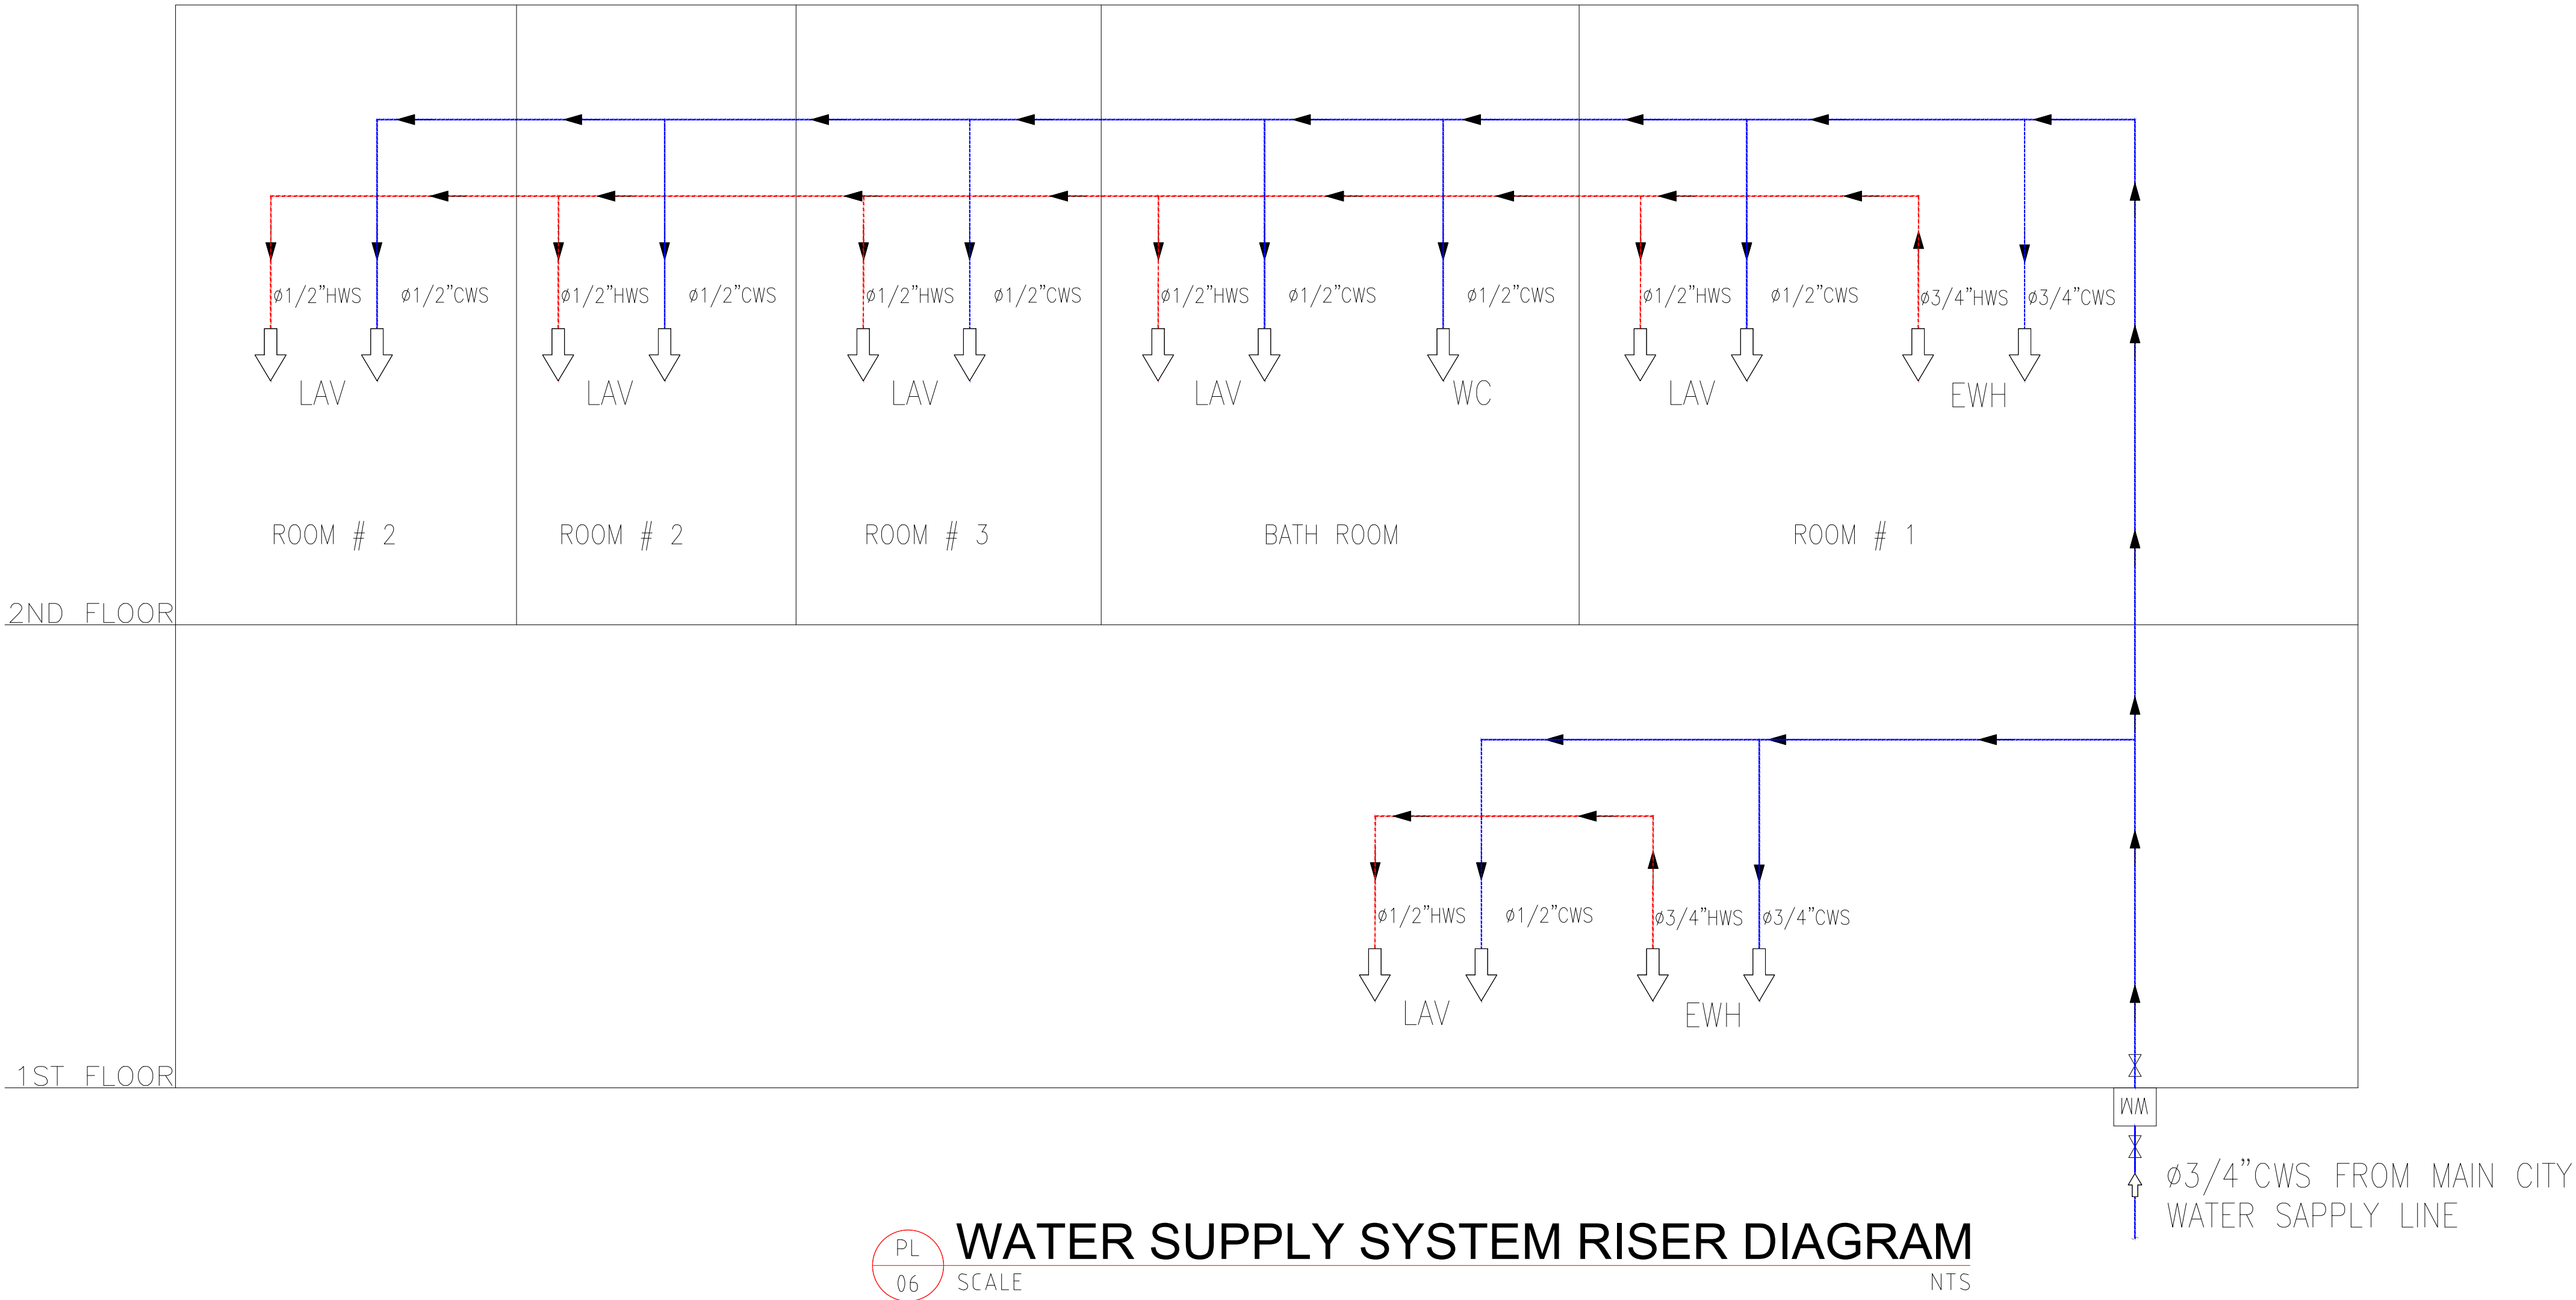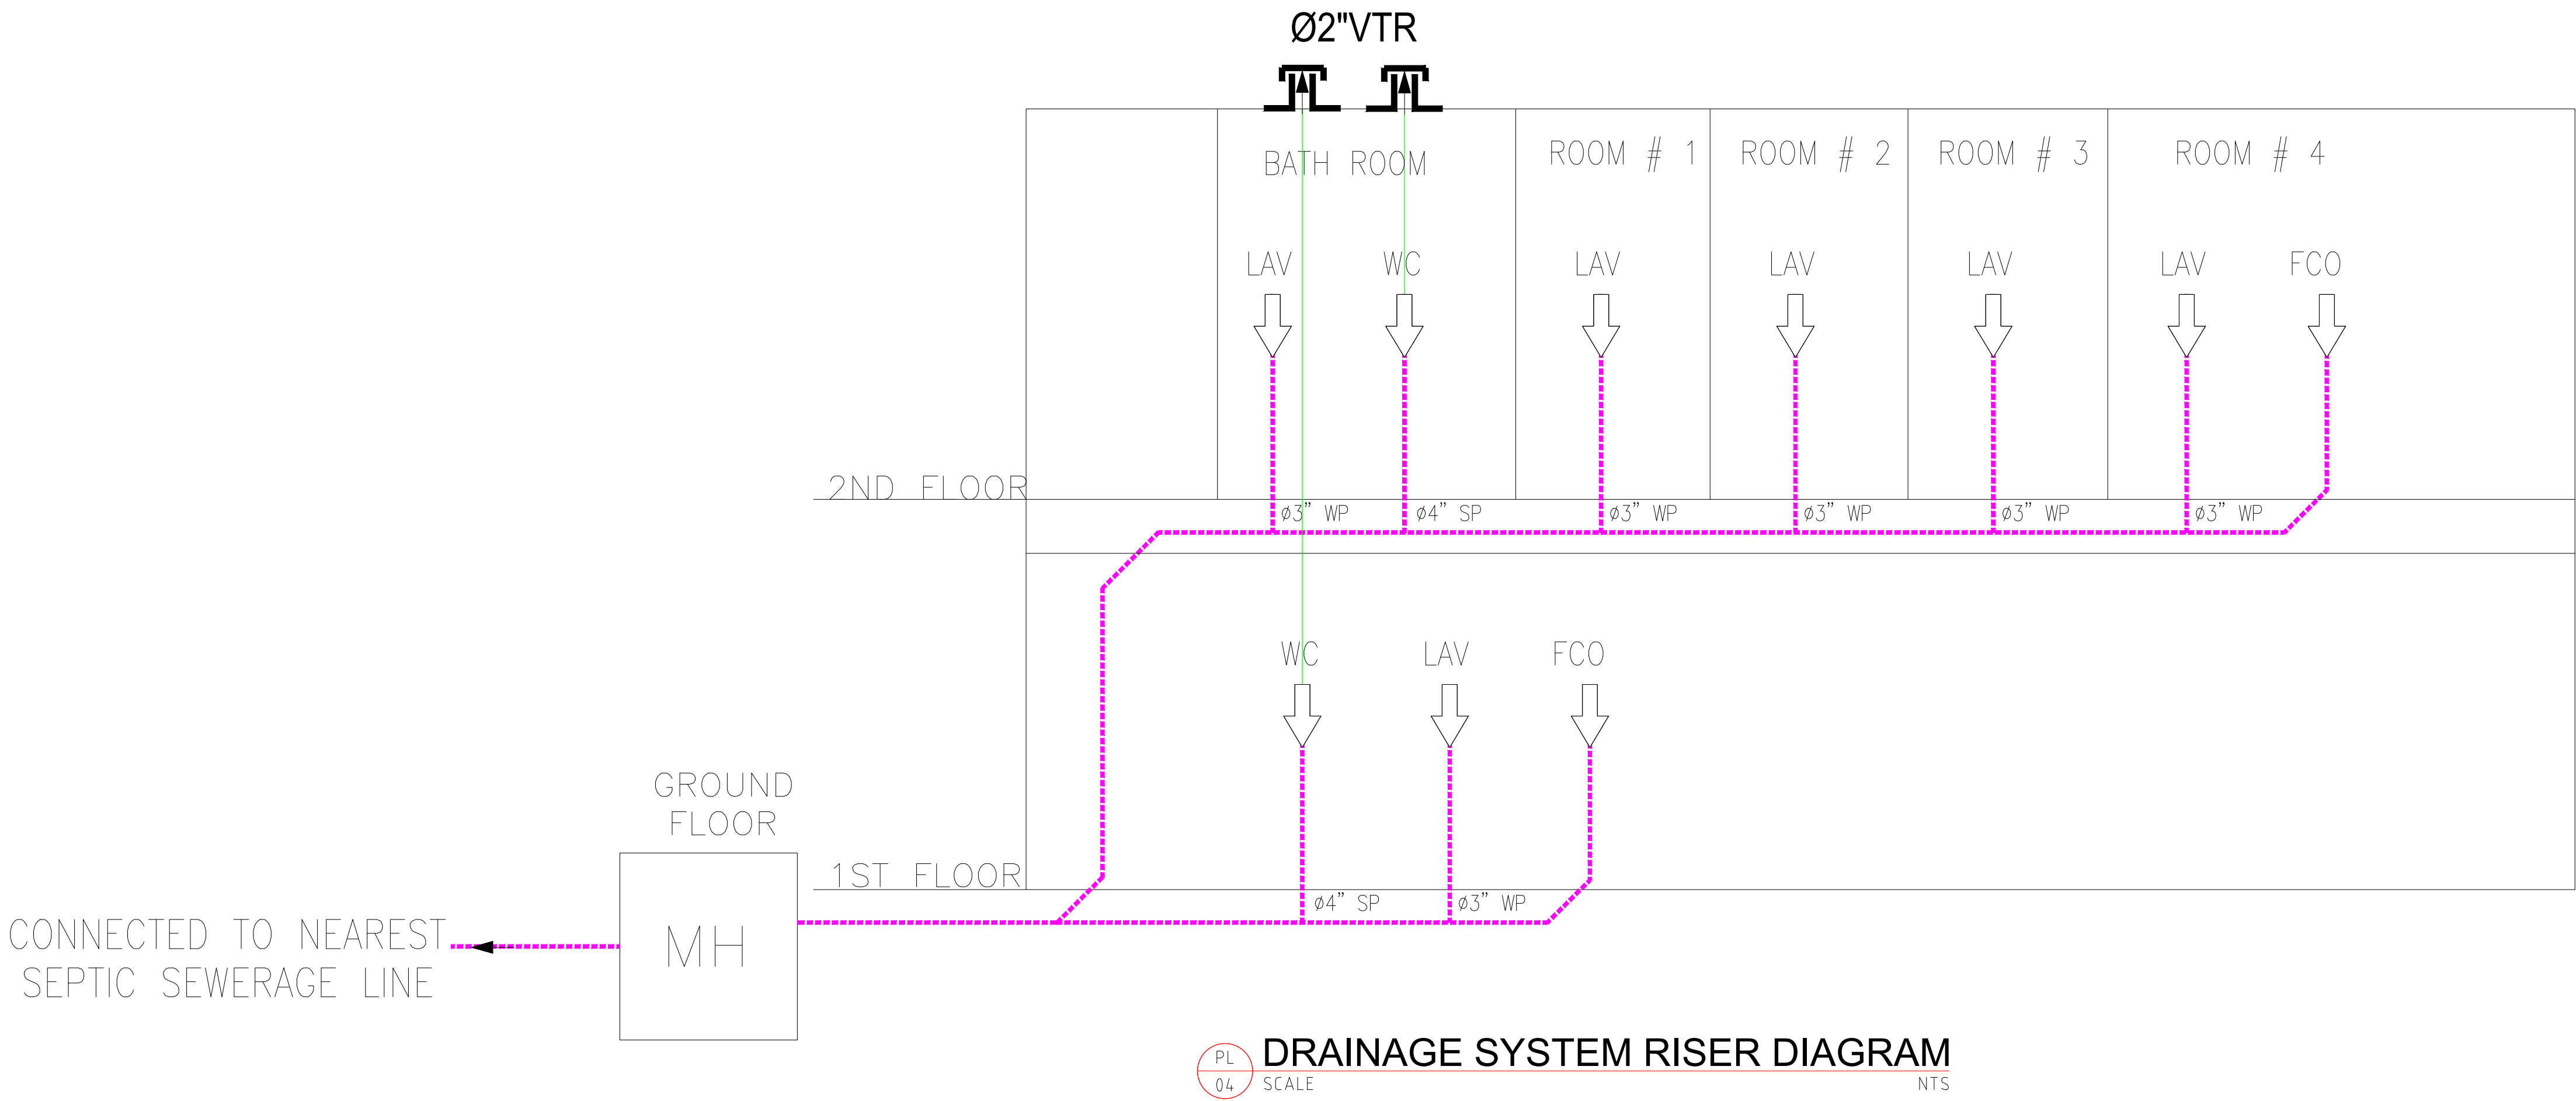

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM










DRAWING STATUS:
DESIGN DRAWING

DISCIPLINE:
PLUMBING

PROJECT TITLE:
CROWL BUILDING

DRAWING TITLE:
RISER DIAGRAM

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO PL-06	SCALE: NTS

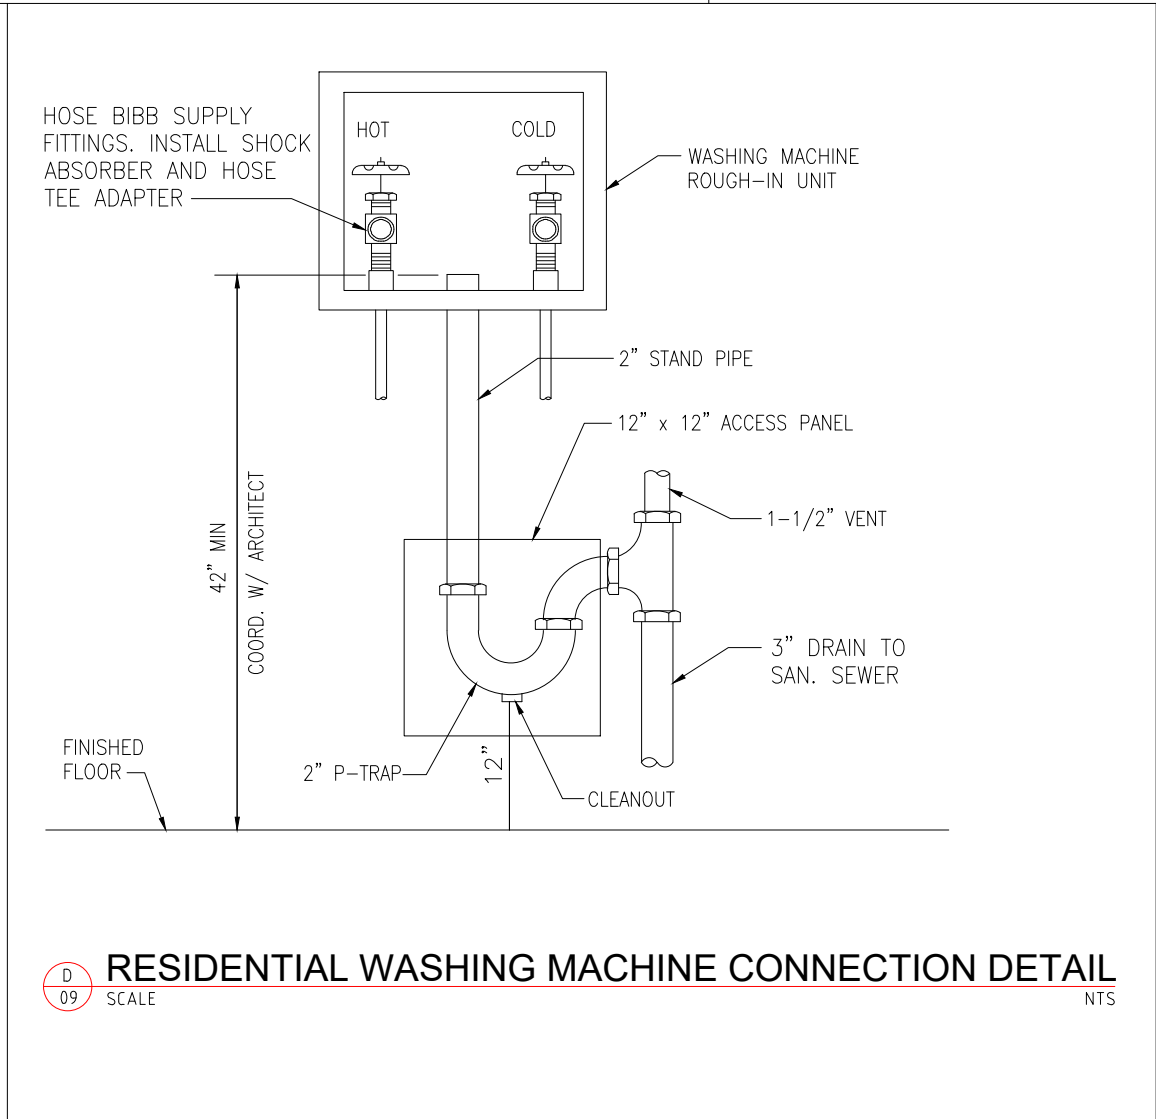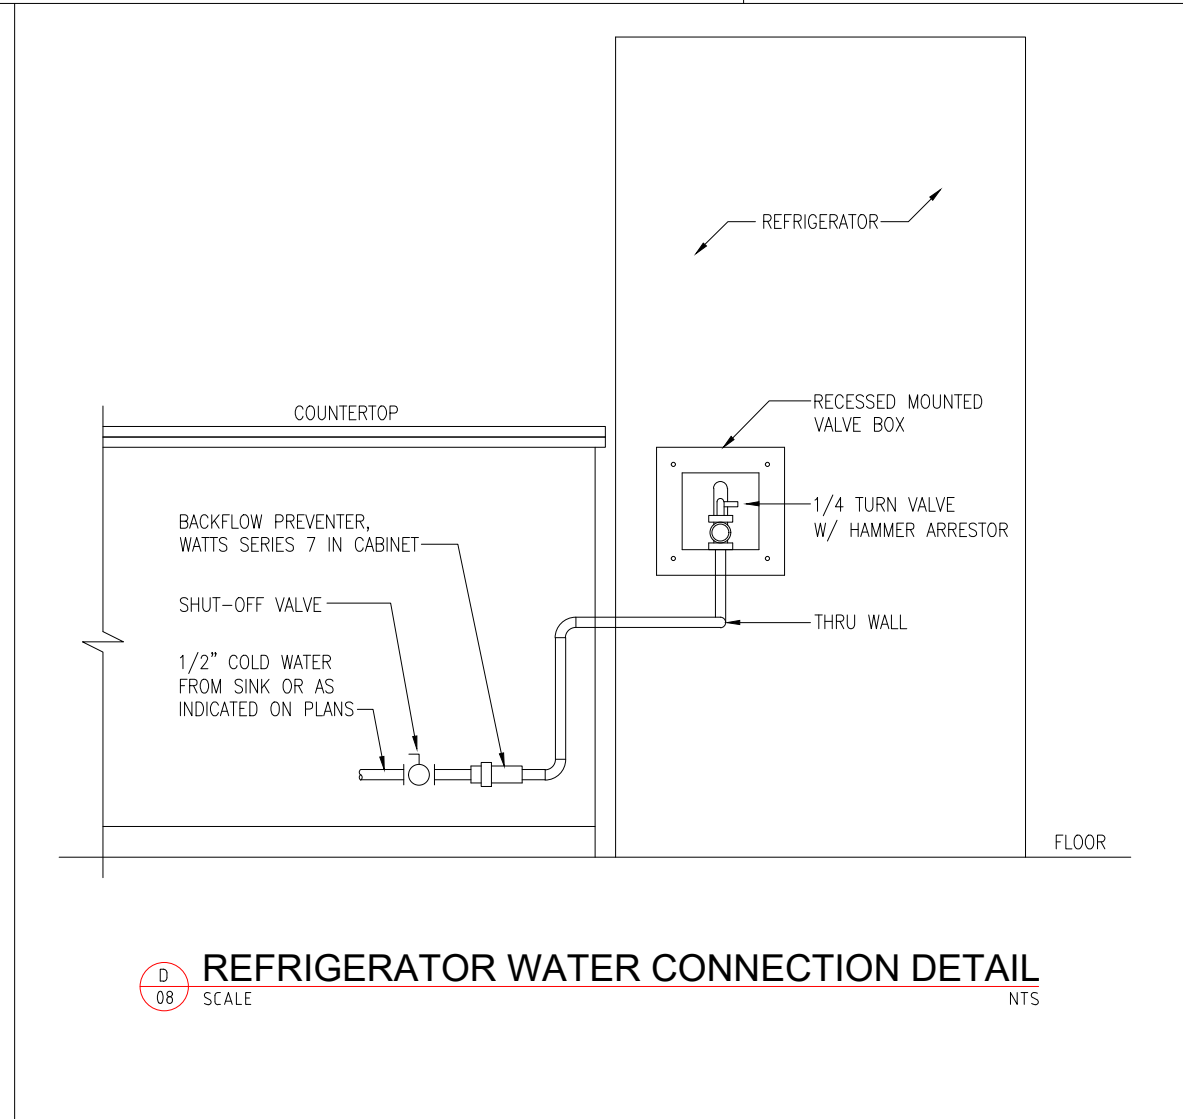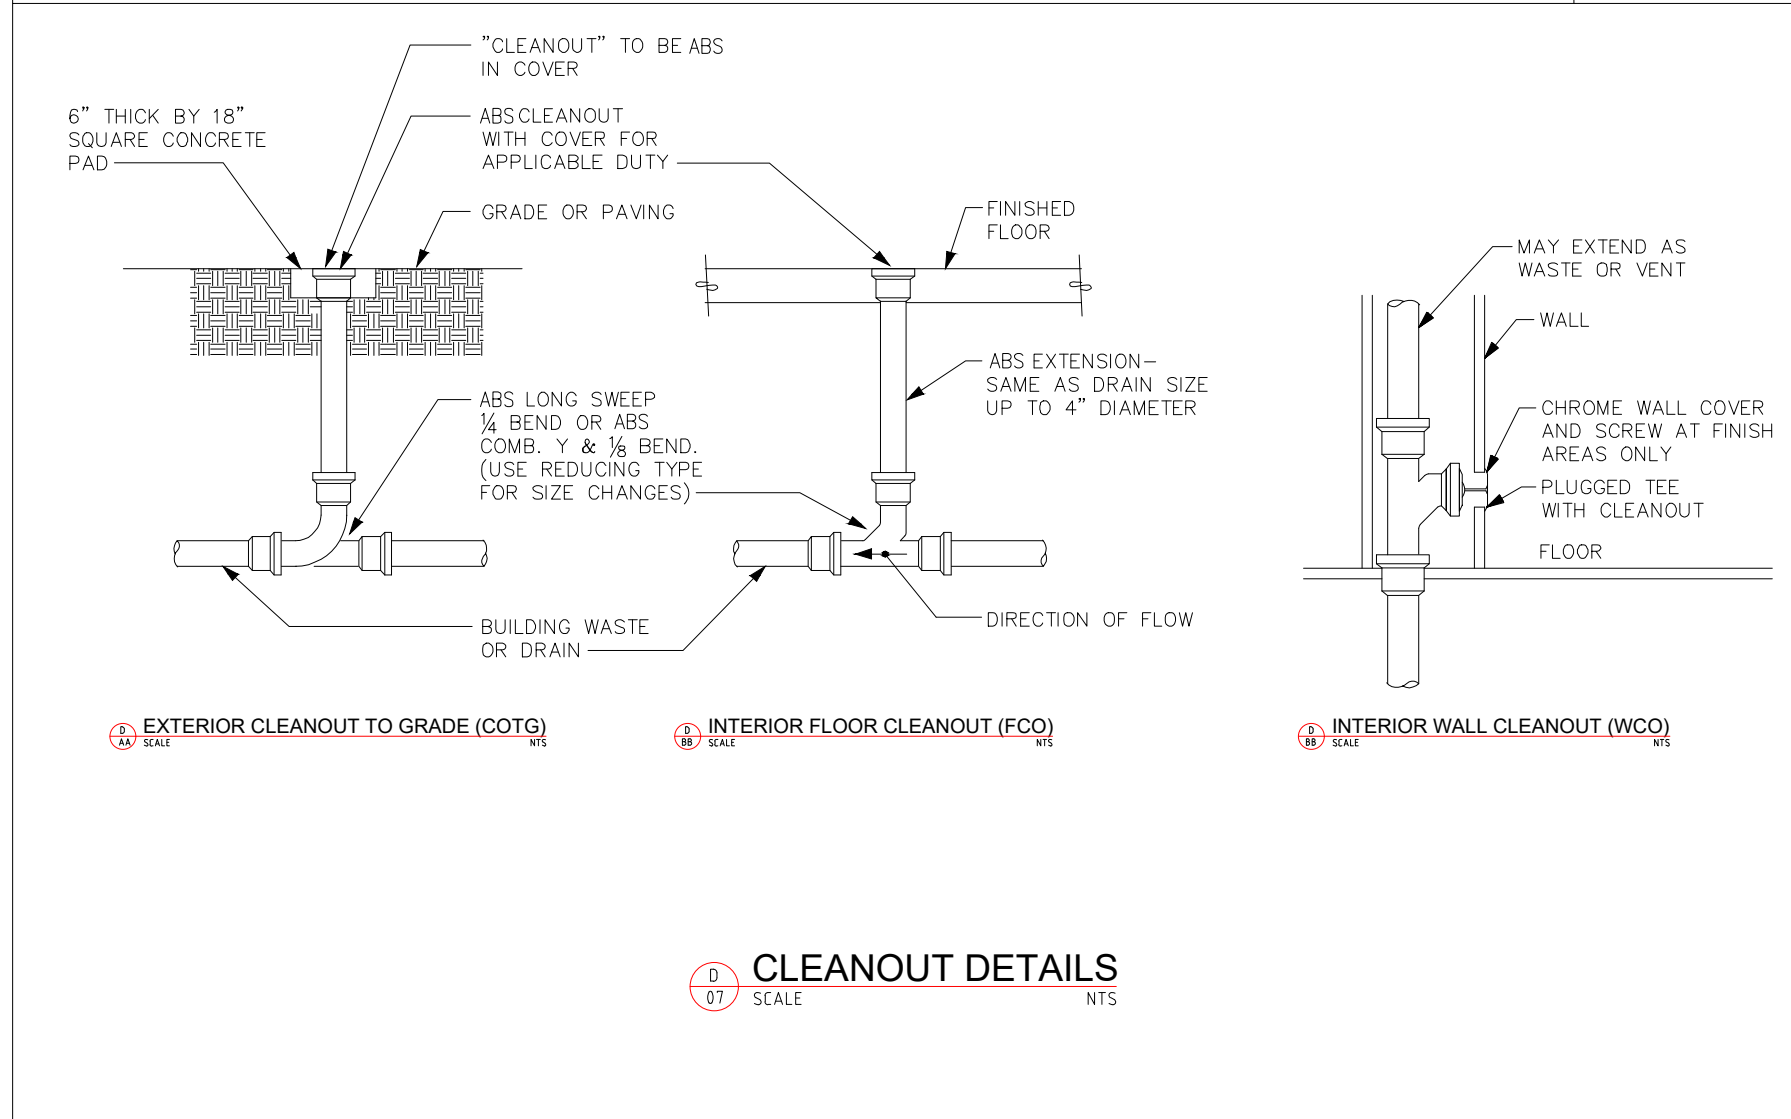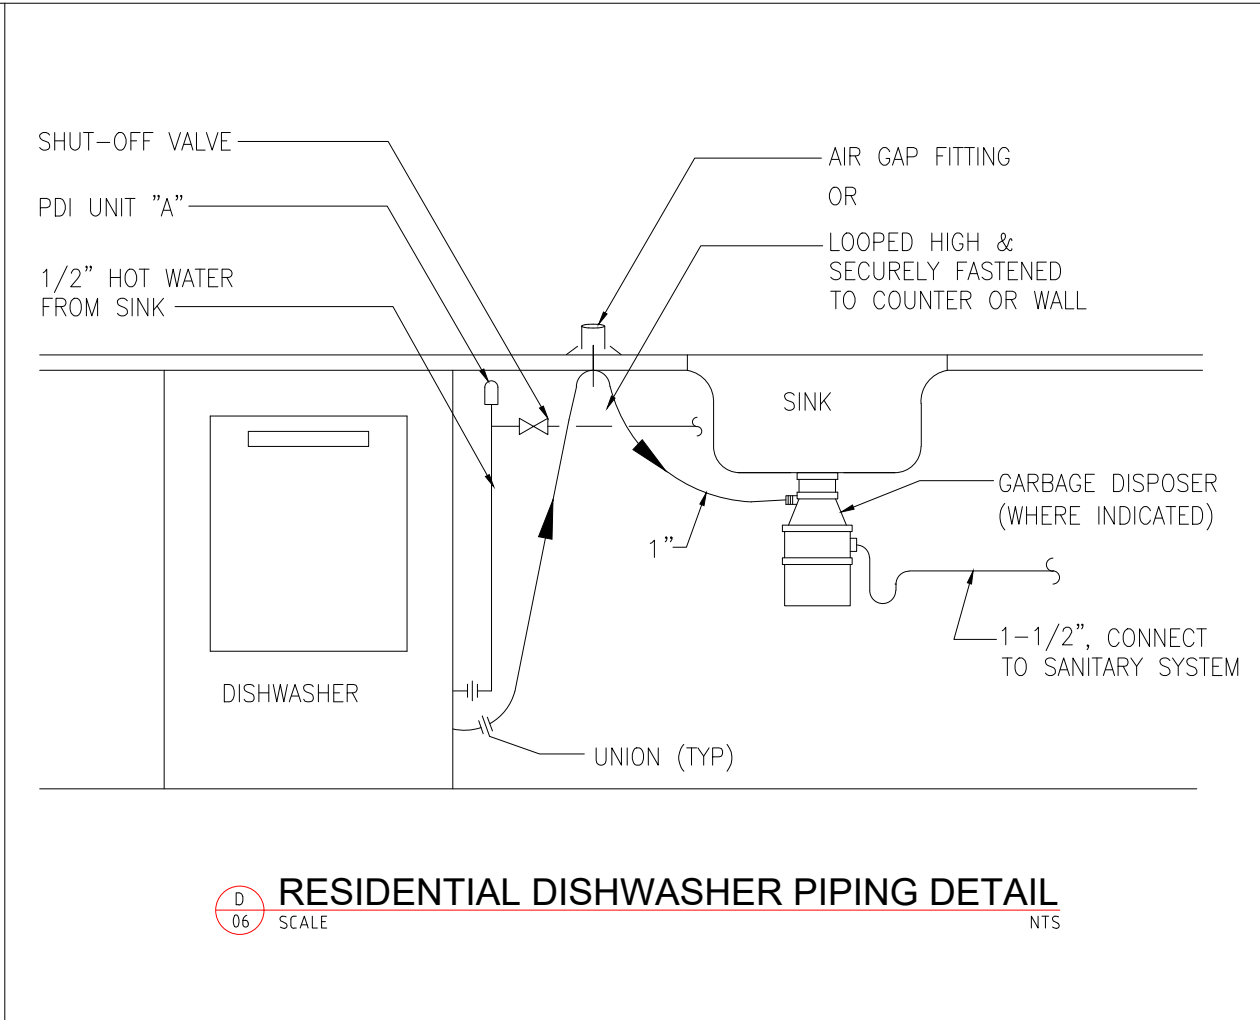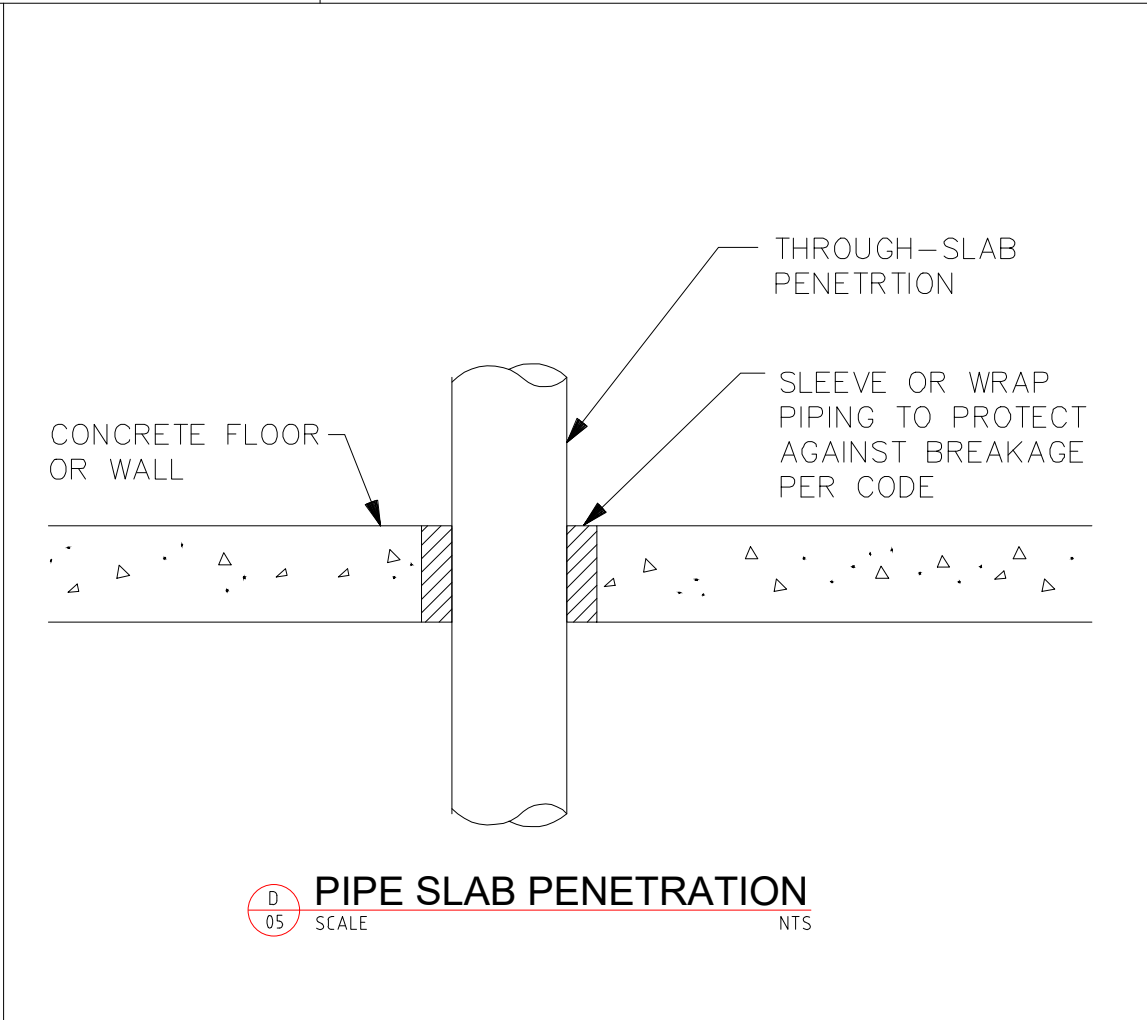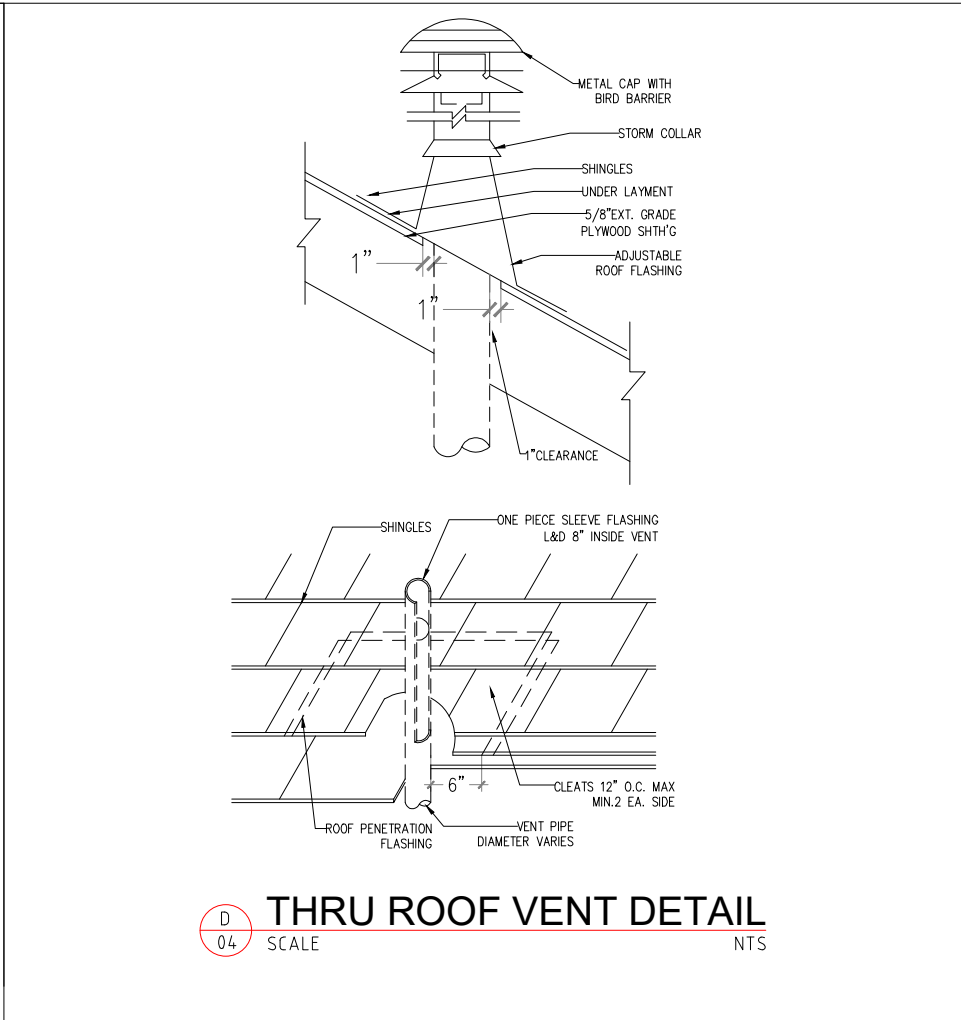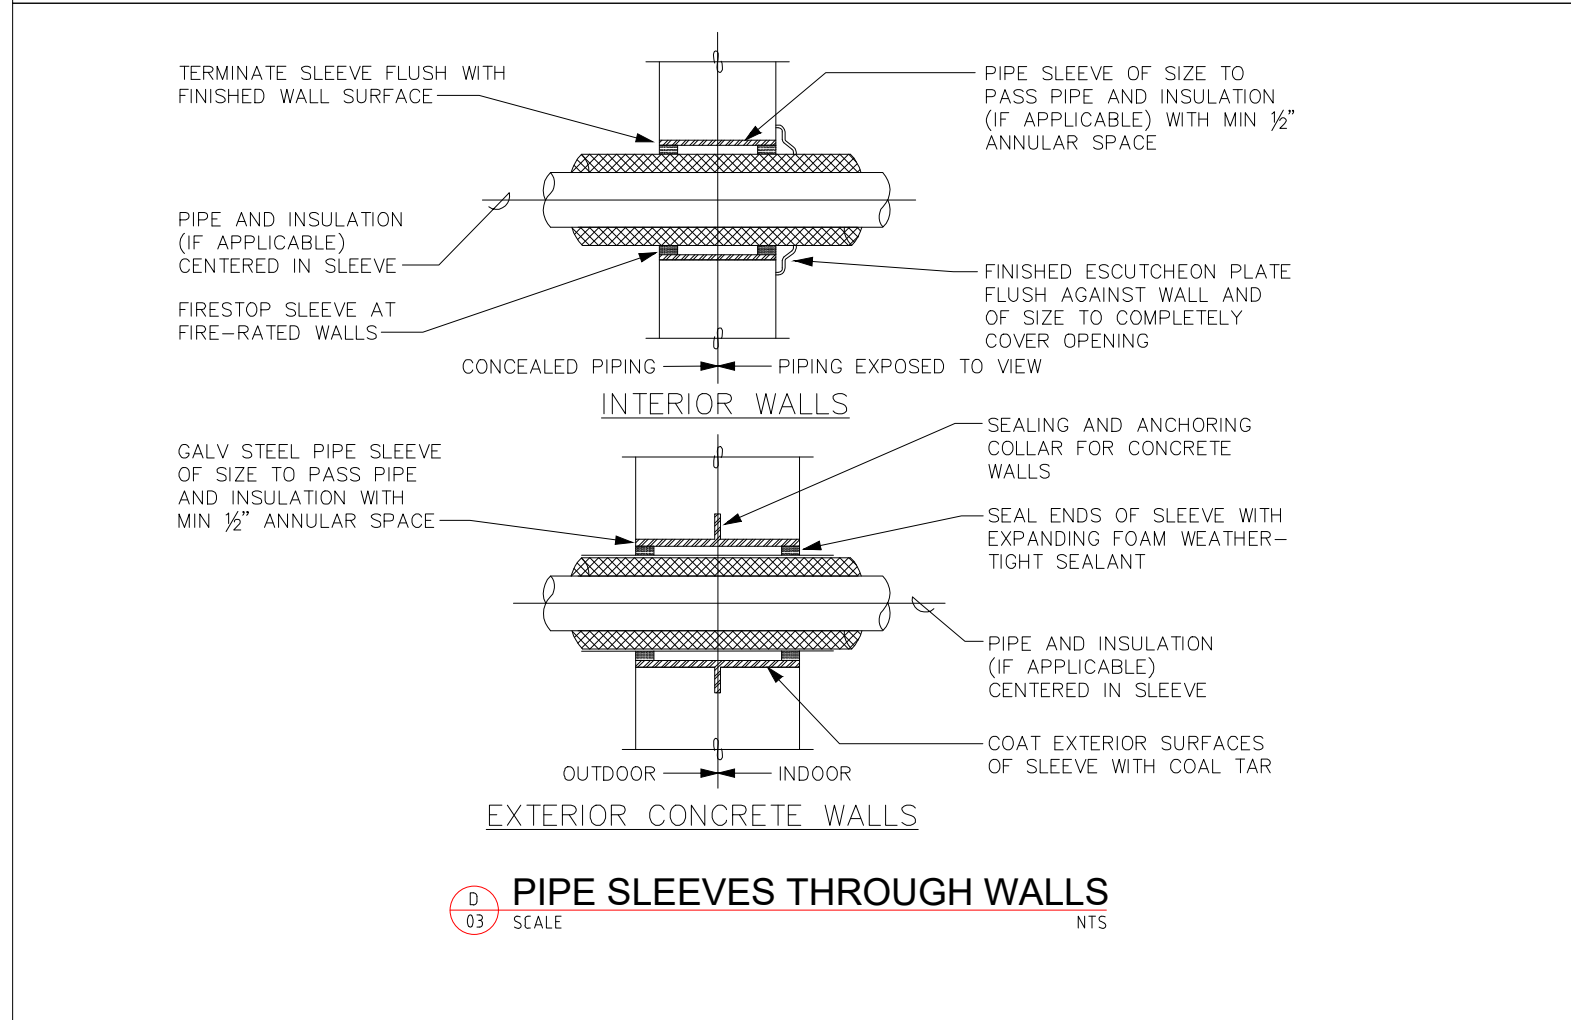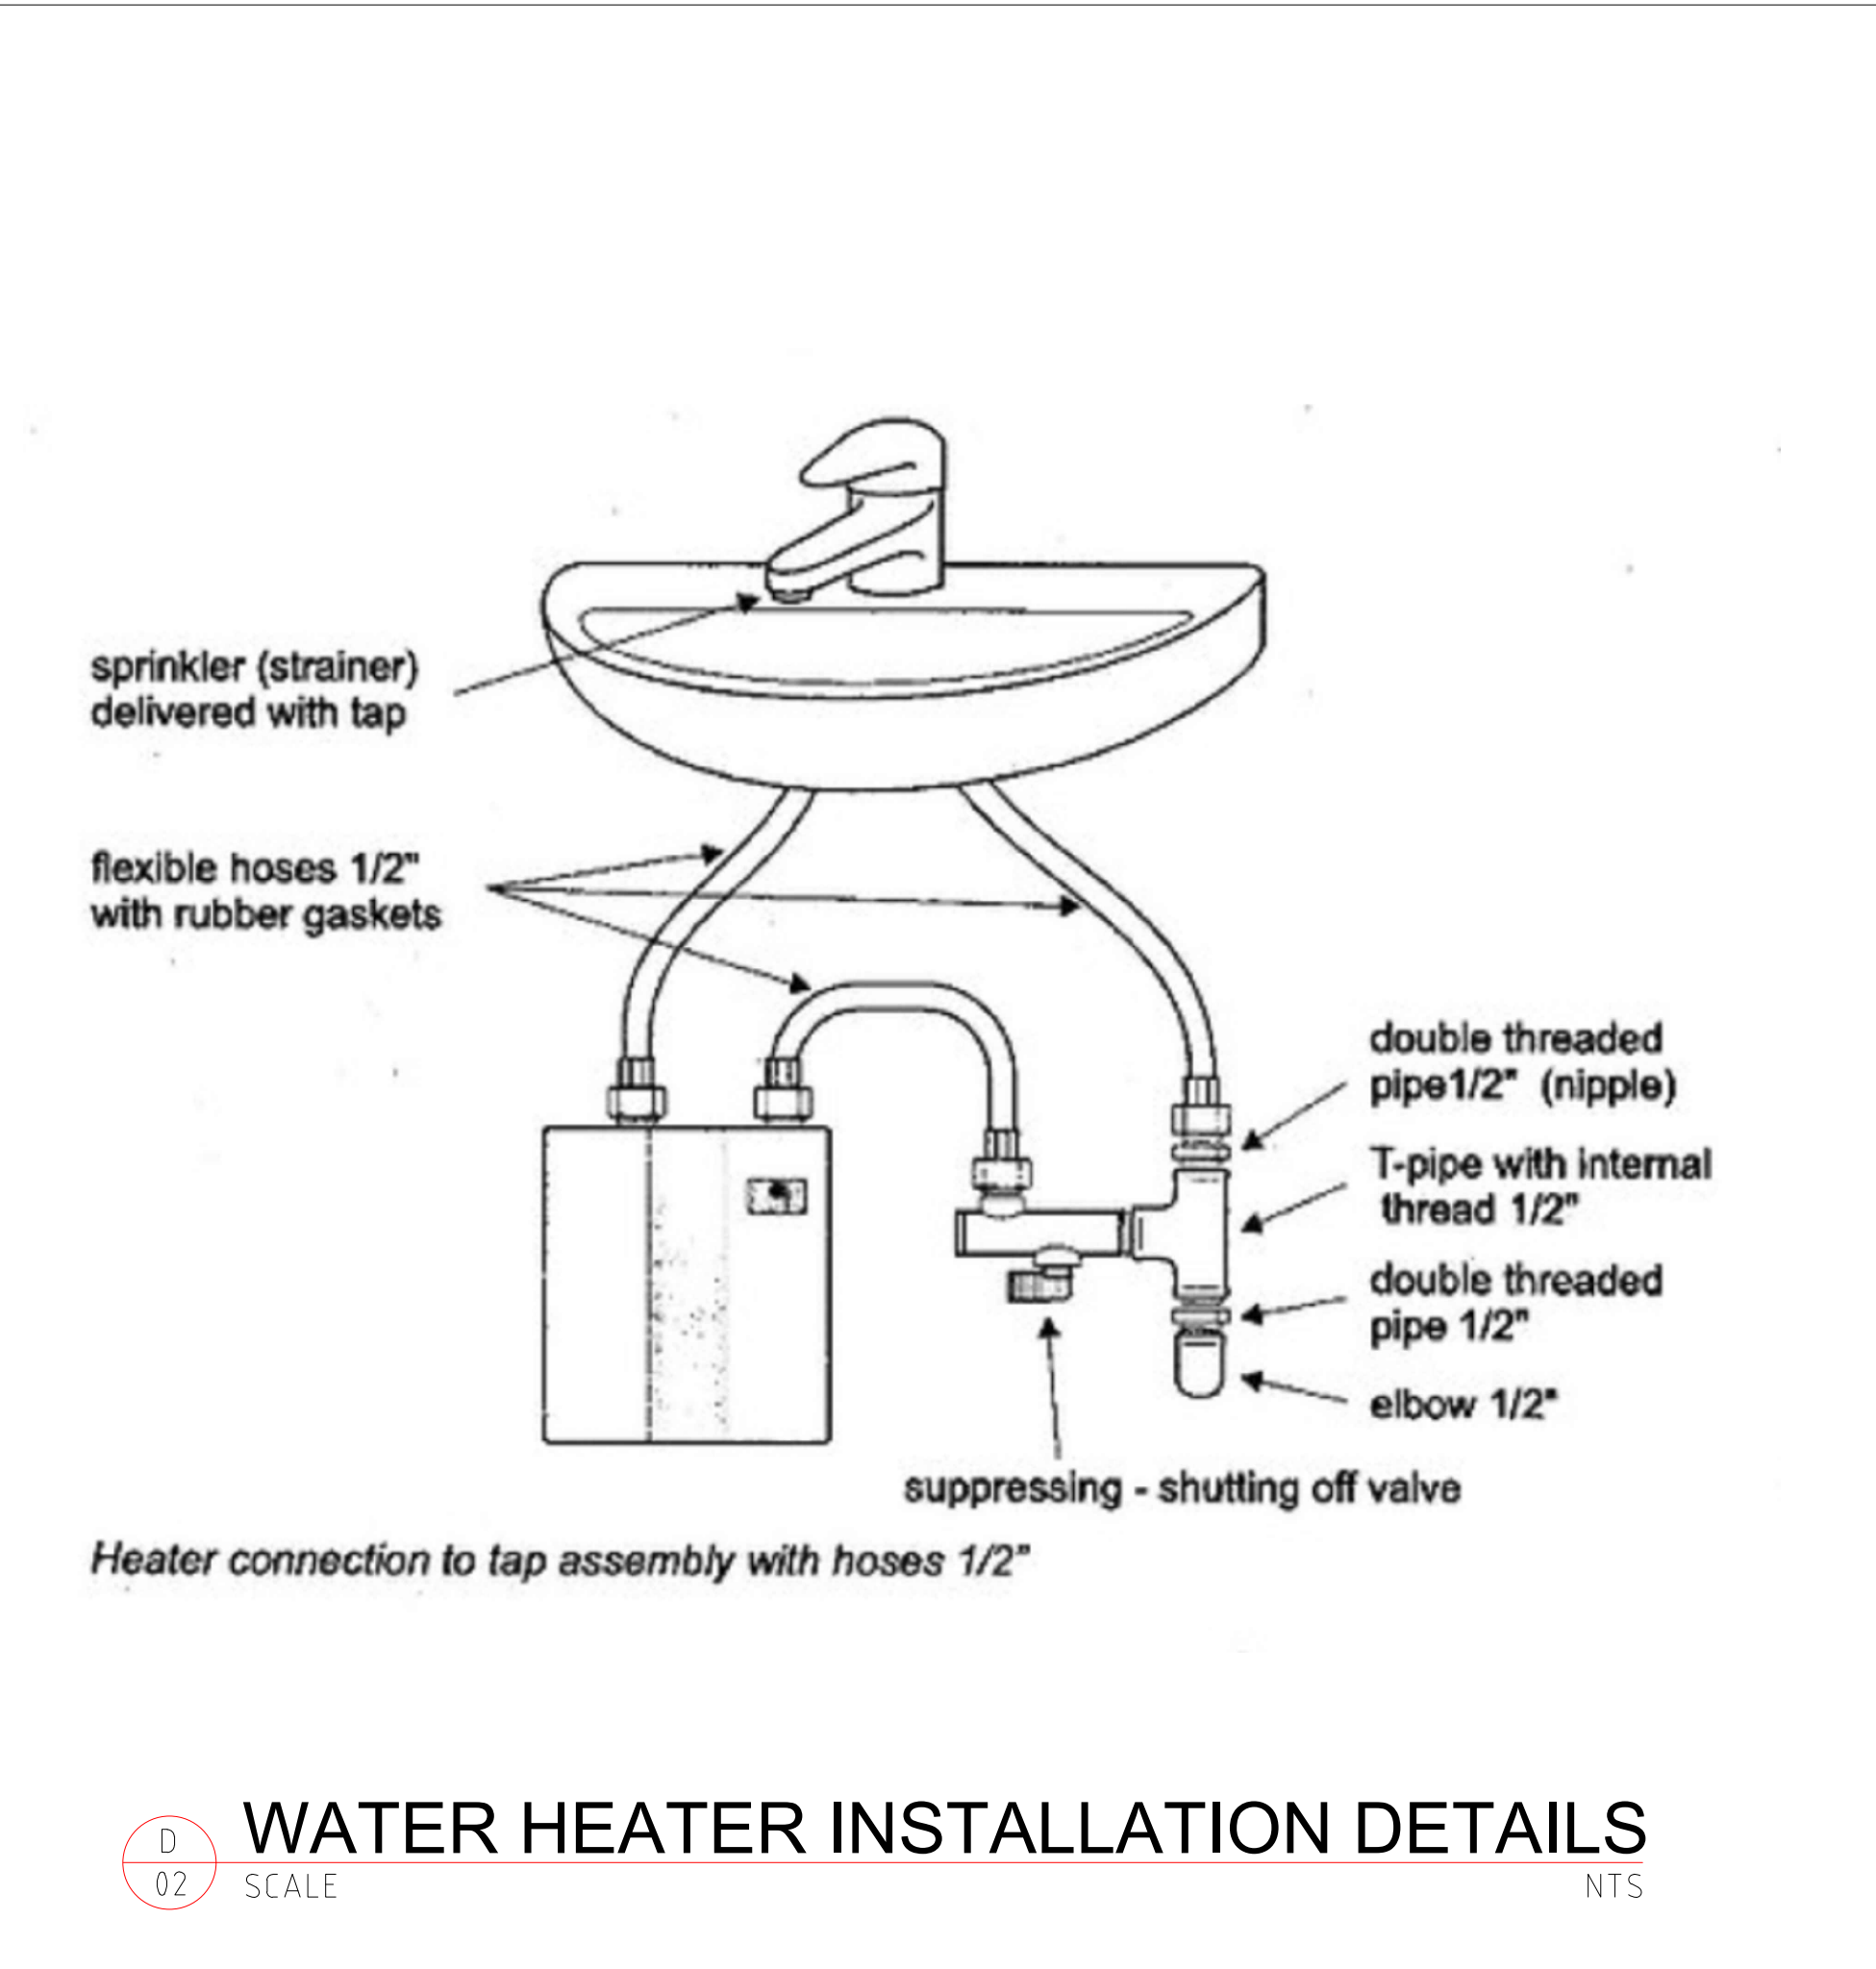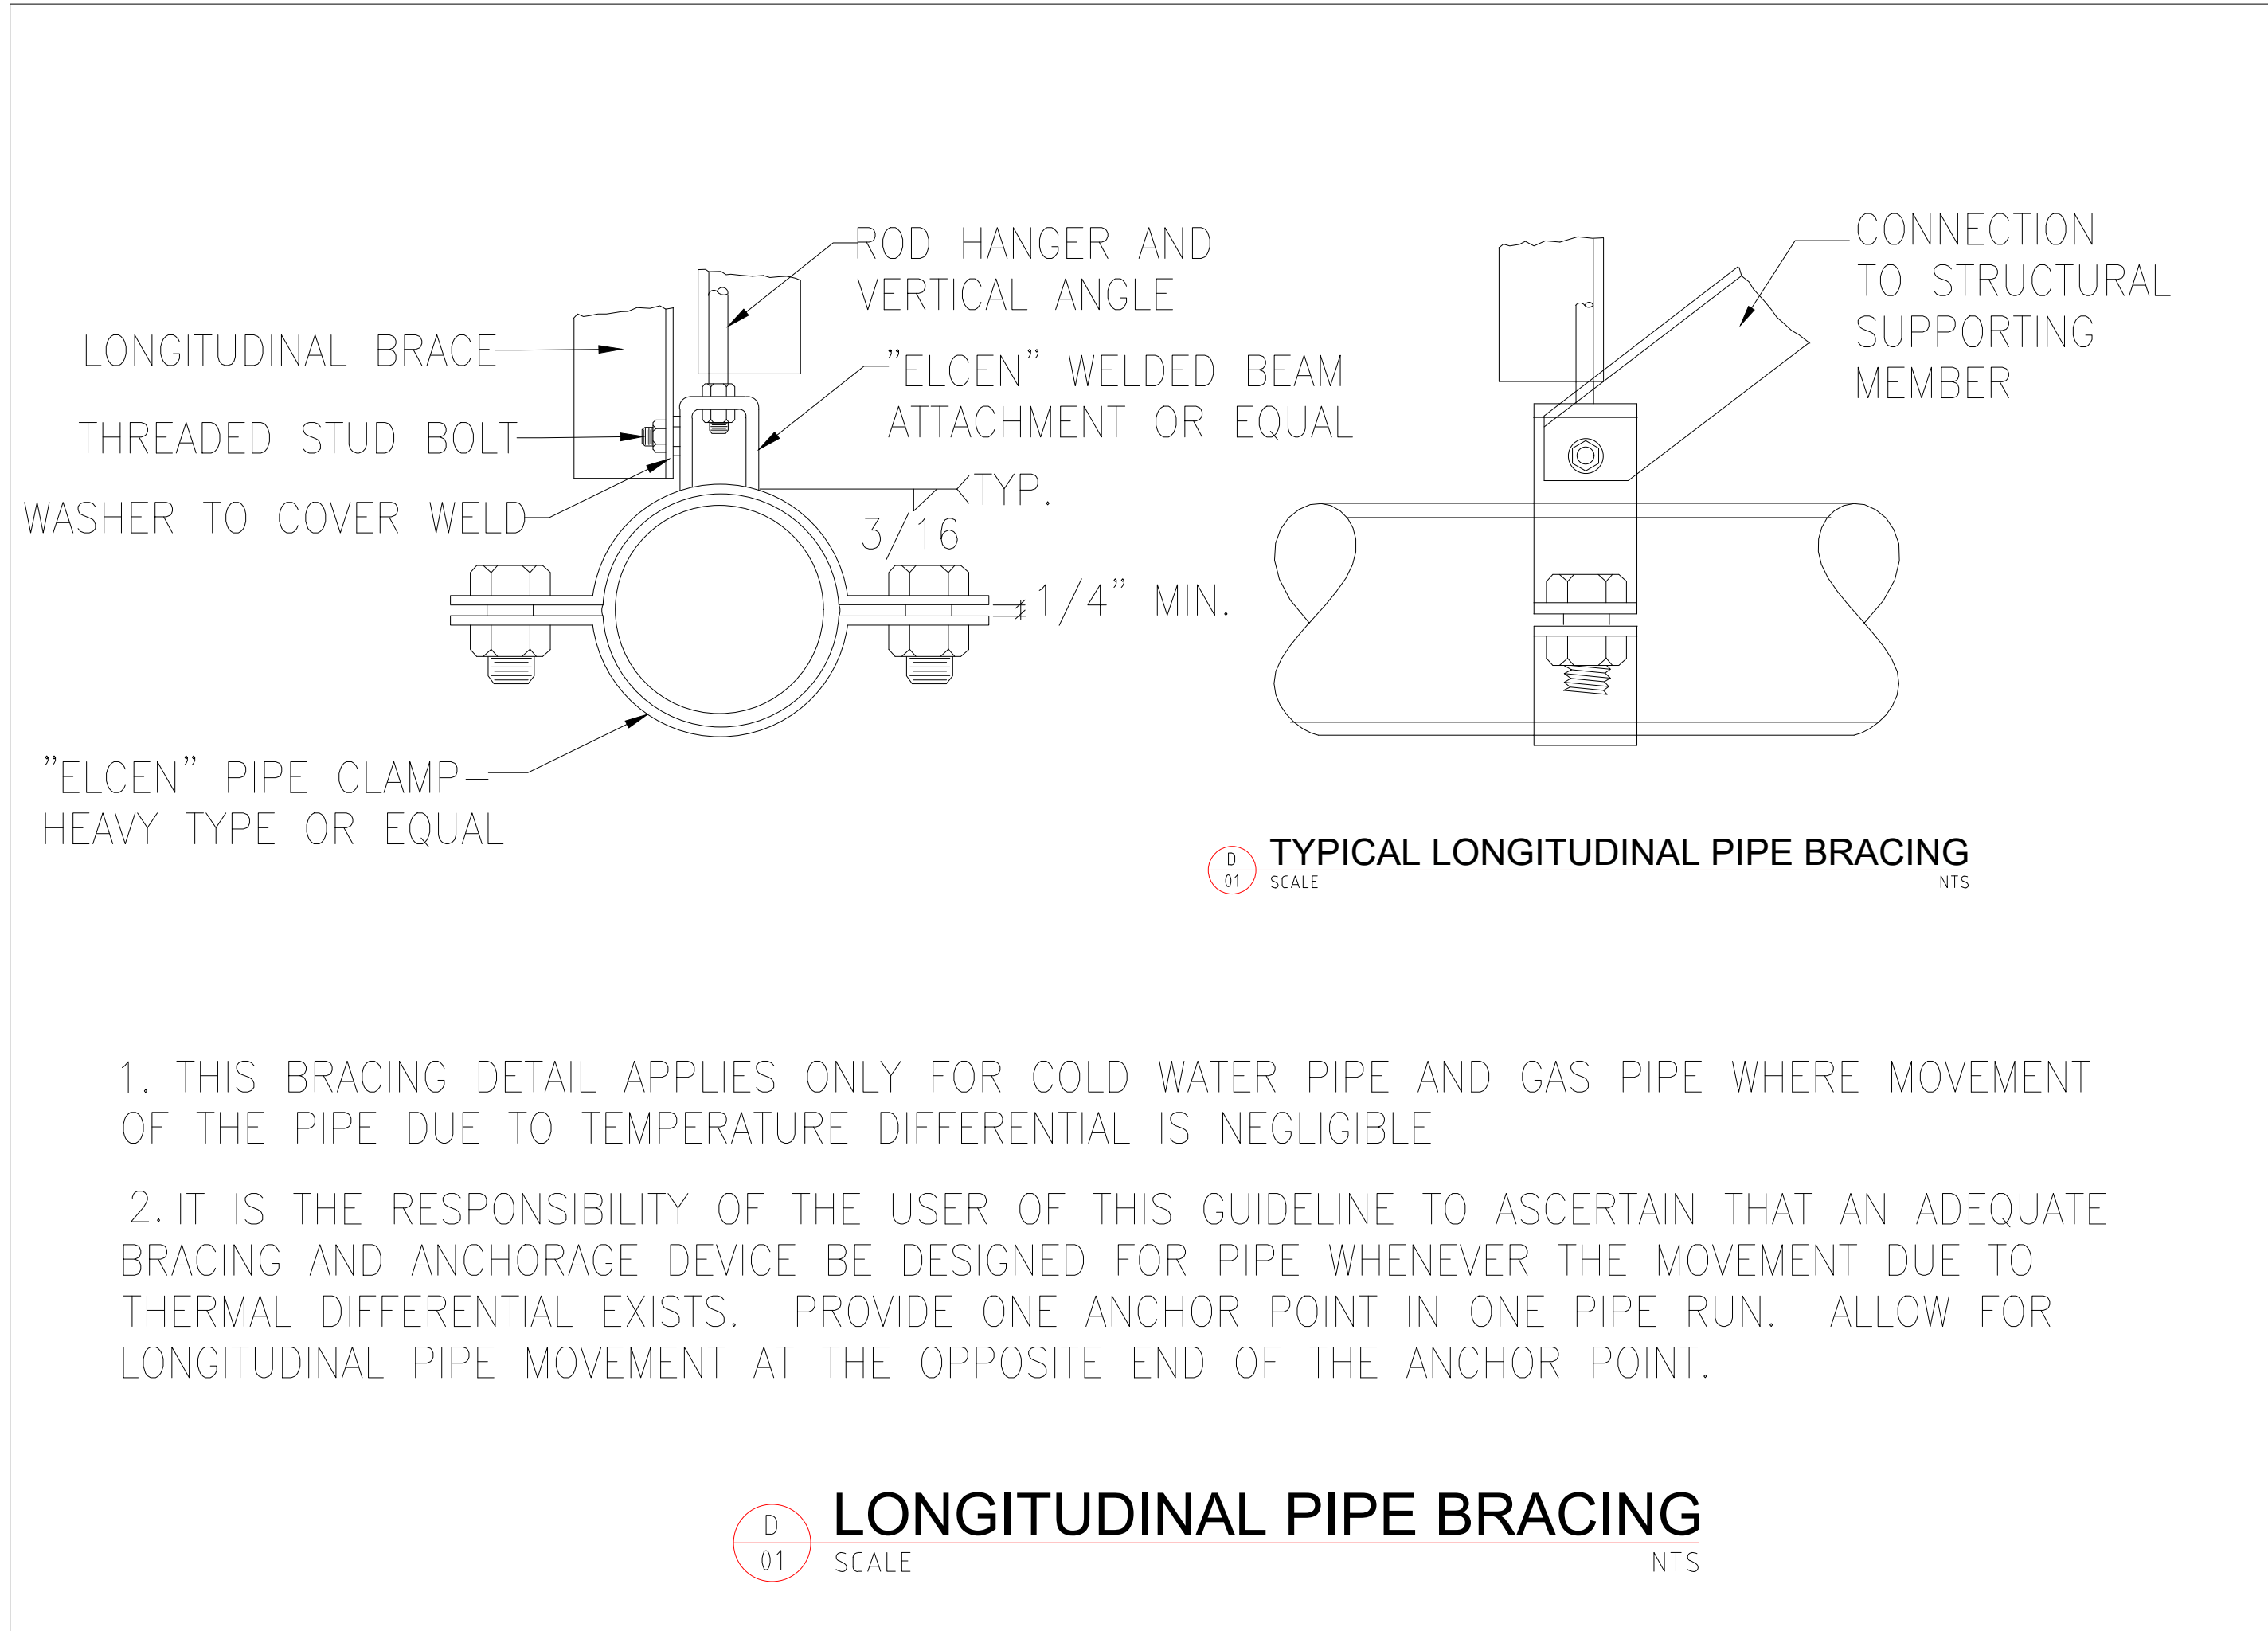

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

PLUMBING


















PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:

DETAILS

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO PL-07	SCALE: NTS

MECHANICAL LEGEND					
SYMBOL	ABBREV.	DESCRIPTION	SYMBOL	ABBREV.	DESCRIPTION
		COORDINATE WITH ELECTRICAL			LINED DUCTWORK (OR PLENUM)
	CD	CONDENSATE DRAIN (A.C)			DUCT RISE IN DIRECTION OF FLOW
	D	DRAIN			DUCT DROP IN DIRECTION OF FLOW
	RD	REFRIGERANT DISCHARGE			ROUND DUCT UP
	RL	REFRIGERANT LIQUID			ROUND DUCT DOWN
	RS	REFRIGERANT SUCTION			SUPPLY DUCT UP
		PIPE DOWN			SUPPLY DUCT DOWN
		PIPE UP		RA/OA	RETURN AIR DUCT/OUTSIDE AIR DUCT UP
		PIPE RISE (OR DN. FOR DROP)			RETURN AIR DUCT/OUTSIDE AIR DUCT DOWN
		DIRECTION OF FLOW IN PIPE			EXHAUST AIR DUCT UP
	AV	AIR VENT (VALVE)			EXHAUST AIR DUCT DOWN
	CHV	CHECK VALVE			DUCT TRANSITION
	CV (2W)	CONTROL VALVE (2-WAY)		CD	CEILING DIFFUSER
	CV (3W)	CONTROL VALVE (3-WAY)		RR	RETURN REGISTER
	FCD	AUTOMATIC FLOW CONTROL DEVICE		ER	EXHAUST REGISTER
	SOV	SHUT OFF VALVE		T'STAT	THERMOSTAT OR TEMPERATURE SENSOR (NUMBER INDICATES EQUIPMENTOR ZONE SERVED)
		GLOBE/BALL/BUTTERFLY VALVE		H'STAT	HUMIDISTAT
	BV	COMBINATION BALANCING & SHUT-OFF VALVE			CARBON DIOXIDE SENSOR
	FEV	FLOW ELEMENT VENTURI		CFM	CUBIC FEET PER MINUTE
		VALVE ON RISE OR DROP			SYMBOL, SEE EQUIPMENT SCHEDULE
	STR.	STRAINER			
	CL	CAPPED LINE			
	DN.	DOWN OR DROP			
	UP	RISE OR RISER			
	RV	PRESSURE RELIEF VALVE			
	PG	PRESSURE GAUGE WITH BALL VALVE			
	R.	ECCENTRIC REDUCER			
	R.	CONCENTRIC REDUCER			
	FC	FLEXIBLE CONNECTION (PIPE)			
	PA	PIPE ANCHOR			
	U	UNION			
		DUCTWORK (1ST NUMBER INDICATES WIDTH SHOWN), NET INSIDE DIMENSION			
	TV	SQUARE ELBOW WITH TURNING VANES			
		RADIUS ELBOW			
	MVD	MANUAL VOLUME DAMPER			
	MOD	MOTOR OPERATED DAMPER			
	BDD	BACKDRAFT DAMPER			
	FD	FIRE DAMPER			
	SD	DUCT MOUNTED SMOKE DETECTOR			
	SFD	AUTOMATIC SMOKE AND FIRE DAMPER			
	FLEX	FLEXIBLE CONNECTION (DUCTWORK)			
	FLEX	FLEXIBLE CONNECTION OR SEISMIC JOINT			

HVAC ABBREVIATIONS			
A	AMPERES	HZ	FREQUENCY
AC	AIR CONDITIONING	IN	INCH OR INCHES
AD	ACCESS DOOR	KW	KILOWATT
AFF	ABOVE FINISHED FLOOR	LG	LENGTH
AL	ACOUSTICAL LINING	LAT	LEAVING AIR TEMPERATURE
BHP	BRAKE HORSEPOWER	LBS	POUNDS
BTU	BRITISH THERMAL UNIT	LDB	LEAVING DRY BULB TEMPERATURE
BTUH	BTU PER HOUR	LIN FT	LINEAR FEET
CD	CEILING DIFFUSER	LWB	LEAVING WET BULB TEMPERATURE
CFM	CUBIC FEET PER MINUTE	MAX	MAXIMUM
CG	CEILING GRILLE	MBH	THOUSAND BTU PER HOUR
CLG	CEILING	MHP	MOTOR HORSEPOWER
COMPR	COMPRESSOR	MIN	MINIMUM
CR	CEILING REGISTER	NIC	NOT IN CONTRACT
DB	DRY BULB	NO.	NUMBER
DIAM	DIAMETER	NTS	NOT TO SCALE
DN	DOWN	RA	RETURN AIR
DWG	DRAWING	RM	ROOM
DX	DIRECT EXPANSION	RPM	REVOLUTIONS PER MINUTE
EAT	ENTERING AIR TEMPERATURE	SP	STATIC PRESSURE
EDB	ENTERING DRY BULB TEMPERATURE	SPEC	SPECIFICATION
EF	EXHAUST FAN	TEMP	TEMPERATURE
EWB	ENTERING WET BULB	TG	TOP GRILLE
EWT	ENTERING WATER TEMPERATURE	TV	TURNING VANES
F	DEGREES FAHRENHEIT	TYP	TYPICAL
FC	FLEXIBLE CONNECTION	W	WIDTH
FD	FIRE DAMPER	W/	WITH
FIN FL	FINISHED FLOOR	W/O	WITHOUT
FLA	FULL LOAD AMPERES	WB	WET BULB
FPM	FEET PER MINUTE	WMS	WIRE MESH SCREEN
FT	FEET	SG	SUPPLY GRILLE
HD	HEAD	RG	RETURN GRILLE
HR	HOUR	SP	SMOKE PURGE
MAU	MAKE UP AIR UNIT		



OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE: MECHANICAL

PROJECT TITLE: CROWL BUILDING

DRAWING TITLE:

NOTES

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO ME-01	SCALE: NTS

FIRST UNIT :
RTU#1
2-TON TRANE BRAND CONDENSER
MODEL NUMBER OF 2TTB3024AI000CA
SERIAL NUMBER OF I22652873F
DATE OF MANUFACTURE CODE IS JUNE 2012
10±YEARS OLD CURRENTLY

SECOND UNIT :
RTU#2
2-TON GOODMAN BRAND CONDENSER
MODEL NUMBER OF GSXI4025ILB
SERIAL NUMBER OF I708404768
DATE OF MANUFACTURE IS AUGUST 2017
5±YEARS OLD CURRENTLY

AUH-1 SCHEDULE													
MARK	QTY	LOCATION	MANUFACTURER AND MODEL	BTU OUTPUT	SUPPLY CFM	ESP (IN. W.G.)	FUEL	Dimensions L x W x H	Gas Connection Size in	ELECTRICAL V/Ph/Hz	MCA	MAX FUSE SIZE	WEIGHT
RTU 4	1	AS SHOWN	AS PER SUPPLIER	48,000	400	0.7	NAT GAS	-	1/2	115/1/60	7.2	15 amp	-
RTU 5	1	AS SHOWN	AS PER SUPPLIER	12,000	200	0.7	NAT GAS	-	1/2	115/1/60	7.2	15 amp	-
OUTDOOR CONDENSING UNIT													
MARK	QTY	LOCATION	MANUFACTURER	TON	COOLING CAPACITY BTU/H	AMBIENT TEMP	FLA	CIRCUIT BREAKER MAX AMPS	LIQUID LINE SUCTION LINE	REF	ELECTRICAL	WEIGHT	DIMENSIONS
CU 4	1	RD	AS PER SUPPLIER	1.0	48,000	95F	0.5	30	3/8" / 1/2"	R410a	208-1-60	165 LBS	----
CU 5	1	RD	AS PER SUPPLIER	1.0	12,000	95F	0.5	30	3/8" / 1/2"	R410a	208-1-60	165 LBS	----
EXHAUST FAN SCHEDULE													
MARK	QTY	LOCATION	MANUFACTURER AND MODEL	TYPE	CFM	E.S.P. (IN. W.G.)	MOTOR DATA			SONES	OPTIONS -ACCESSORIES	WEIGHT	
							WATTS	SPEED	ELECTRICAL				
EF 1	2	GF UTILITY RM	AIR KING AK50 OR EQUAL	CEILING MOUNTED	50	0.25	1500	1	120-1-60	1.5	BACK DRAFT DAMPER CONTROLLED BY SWITCH	10	

NOTES:
VERIFY WITH ARCHITECT/OWNER FOR EXACT MODEL NUMBER BEFORE ROUGH-IN
ALL EXHAUST FANS TO BE ENERGY STAR CERTIFIED



EXISTING TO BE REMAIN

EXISTING TO BE REMAIN

TENANT SPACE

STOR.

LOBBY

NO PARKING

(E) BLDG. MECH.
(NO WORK)

TRANE BRAND
CONDENSER
(1 TR).
SUPPLY AIR DUCT F/A

RR

04"
SIDEWALL
EXHAUST

GOODMAN BRAND
CONDENSER
4(1 TR).
SUPPLY AIR DUCT F/A

200 CFM
8"x6"

ME
02

FIRST FLOOR HVAC PLAN

SCALE

3/8"=1'-0"

OWNER SIGNATURE

REVISION STATUS

Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS

APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

MECHANICAL

PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:

FIRST FLOOR HVAC PLAN



DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO ME-02	SCALE: 3/8"=1'-0"

FIRST UNIT :
RTU#1
4-TON PAYNE BRAND
MODEL NUMBER OF PY1PJB04890ABAA
SERIAL NUMBER OF 0705651103
DATE OF MANUFACTURE CODE IS FEB 2005
17±YEARS OLD CURRENTLY

SECOND UNIT :
RTU#2
2-TON AMERICAN STANDARD BRAND
MODEL NUMBER OF 4YCC4024A1060AB
SERIAL NUMBER OF 170311661L
DATE OF MANUFACTURE IS JANUARY 2017
5±YEARS OLD CURRENTLY

THIRD UNIT :
RTU#3
3-TON AMERICAN STANDARD BRAND
MODEL NUMBER OF 4YCC4036A1070AA
SERIAL NUMBER OF 152311590L
DATE OF MANUFACTURE IS MAY 2015
7±YEARS OLD CURRENTLY

AHU-1 SCHEDULE													
MARK	QTY	LOCATION	MANUFACTURER AND MODEL	BTU OUTPUT	SUPPLY CFM	ESP (IN. W.G.)	FUEL	Dimensions L x W x H	Gas Connection Size in.	ELECTRICAL V/PH/Hz	MCA	MAX FUSE SIZE	WEIGHT
1	1	AS SHOWN	AS PER SUPPLIER	24,000	900	0.7	NAT GAS	-	1/2	115/1/60	7.2	15 amp	-
2	1	AS SHOWN	AS PER SUPPLIER	24,000	750	0.7	NAT GAS	-	1/2	115/1/60	7.2	15 amp	-
3	1	AS SHOWN	AS PER SUPPLIER	24,000	750	0.7	NAT GAS	-	1/2	115/1/60	7.2	15 amp	-
OUTDOOR CONDENSING UNIT													
MARK	QTY	LOCATION	MANUFACTURER	TON	COOLING CAPACITY BTU/H	AMBIENT TEMP	FLA	CIRCUIT BREAKER MAX AMPS	LIQUID LINE SUCTION LINE	REF	ELECTRICAL	WEIGHT	DIMENSIONS
1	1	RD	AS PER SUPPLIER	2.0	24,000	95F	0.5	30	3/8"	R410a	208-1-60	165 LBS	----
2	1	RD	AS PER SUPPLIER	2.0	24,000	95F	0.5	30	3/8"	R410a	208-1-60	165 LBS	----
3	1	RD	AS PER SUPPLIER	2.0	24,000	95F	0.5	30	3/8"	R410a	208-1-60	165 LBS	----
EXHAUST FAN SCHEDULE													
MARK	QTY	LOCATION	MANUFACTURER AND MODEL	TYPE	CFM	E.S.P. (IN. W.G.)	MOTOR DATA			SONES	OPTIONS -ACCESSORIES	WEIGHT	
							WATTS	SPEED	ELECTRICAL				
1	2	GF UTILITY RM	AIR KING AK50 OR EQUAL	CEILING MOUNTED	50	0.25	1500	1	120-140	1.5	BACK DRAFT DAMPER CONTROLLED BY SWITCH	10	
NOTES: VERIFY WITH ARCHITECT/OWNER FOR EXACT MODEL NUMBER BEFORE ROUGH-IN ALL EXHAUST FANS TO BE ENERGY STAR CERTIFIED													

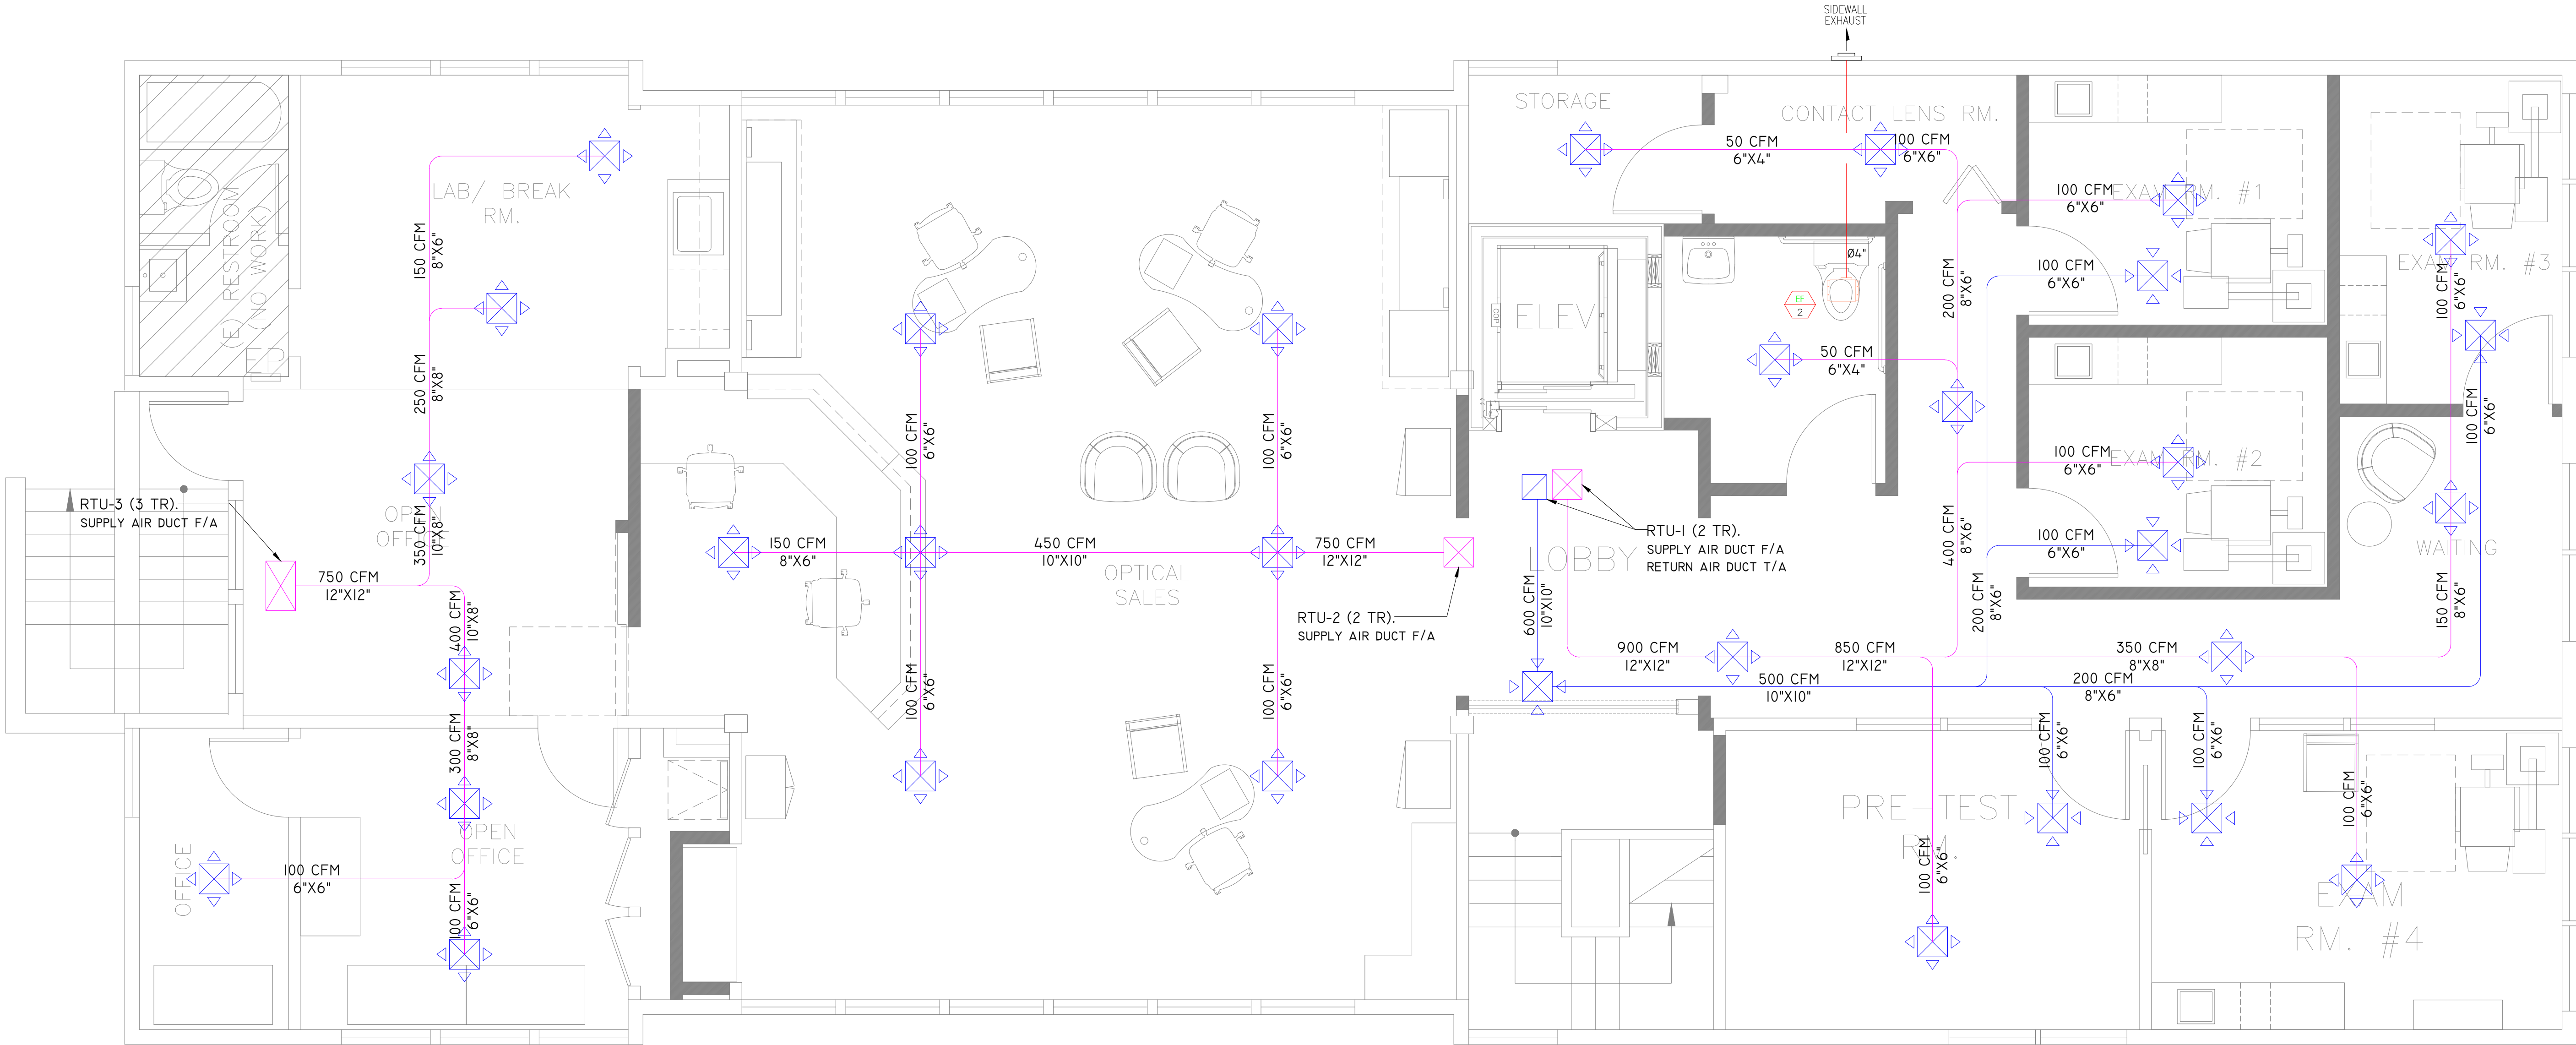

SECOND FLOOR HVAC PLAN
SCALE 1/4"=1'-0"

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

MECHANICAL


PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:


SECOND FLOOR HVAC PLAN

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO ME-03	SCALE: 1/4"=1'-0"

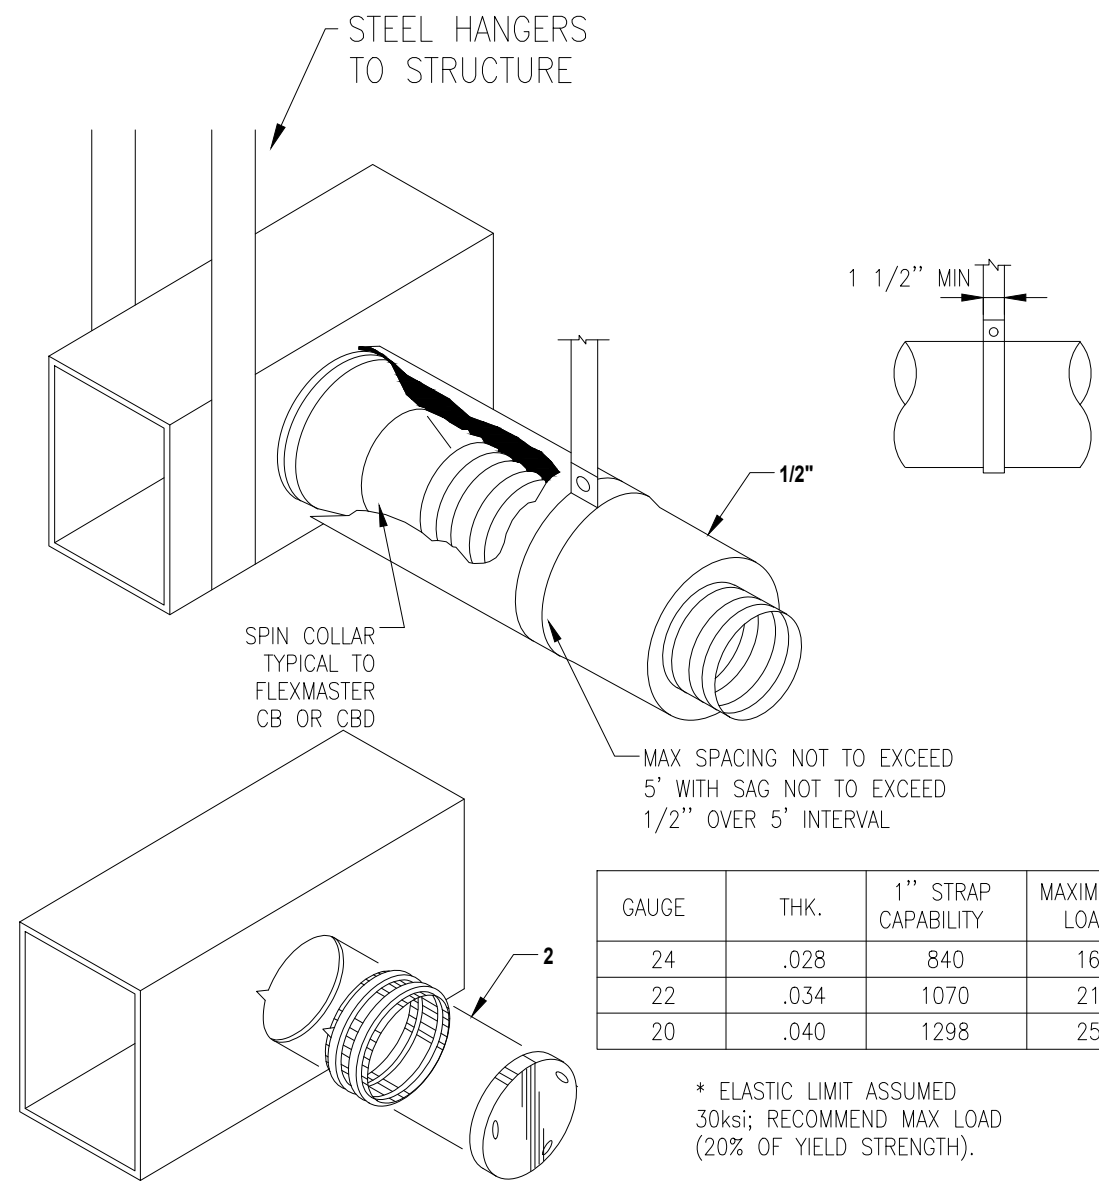


SUPPORT REQUIREMENTS FOR DUCT
D 01 SCALE NTS


- NOTES:
1. PROVIDE XVENT OR EQUAL NON-CORROSIVE WALL LOUVER W/ INTEGRAL NON-RETURN DAMPER RATED FOR MIAMI-DADE SERVICE.
 2. MOUNT FLUSH WITH STRUCTURE AND SECURE W/ MASONARY ANCHORS.
 3. APPLY FINISHED WALL SURFACE TO LOUVER FLANGE.
 4. PAINT TO SUIT ARCHITECTURAL FINISH.

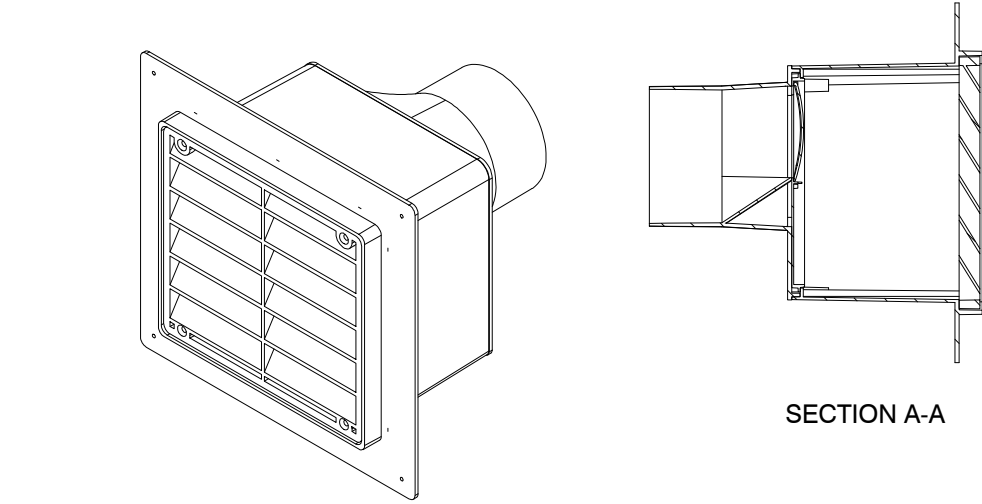


TYPICAL VENT LOUVER TERMINATION AT WEATHER
D 02 SCALE NTS

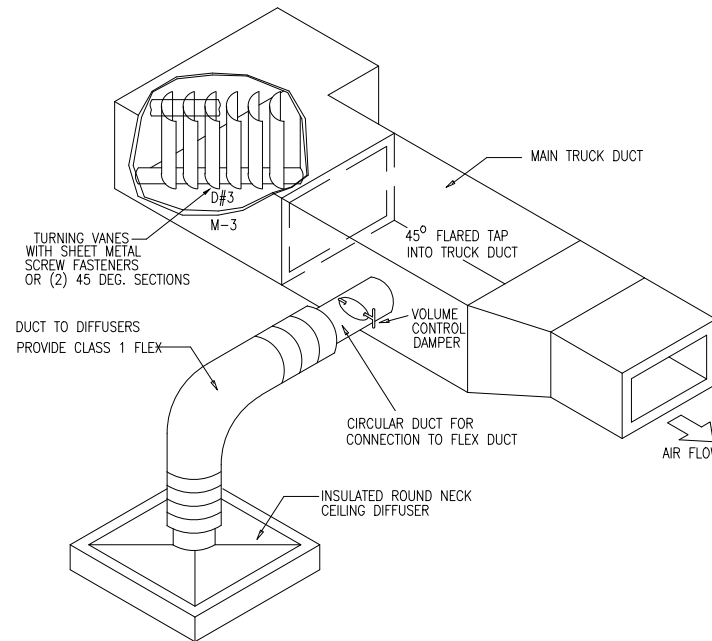


TURNING VANES DETAIL
D 03 SCALE NTS

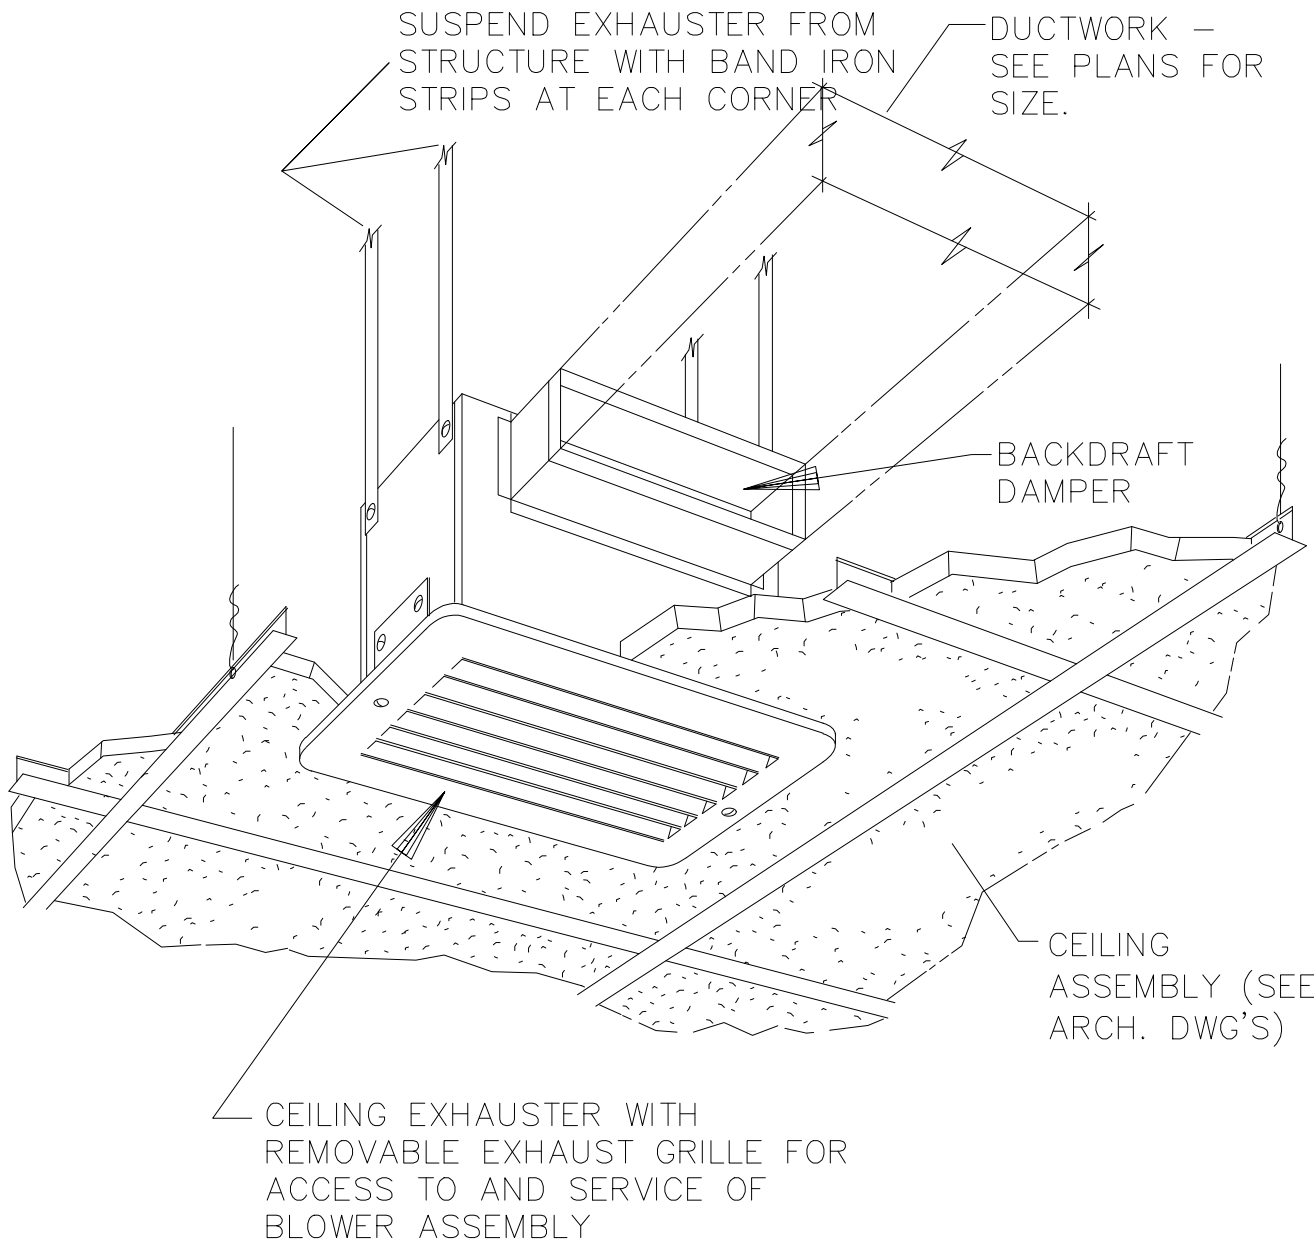


CEILING MOUNTED FAN DETAIL
D 04 SCALE NTS

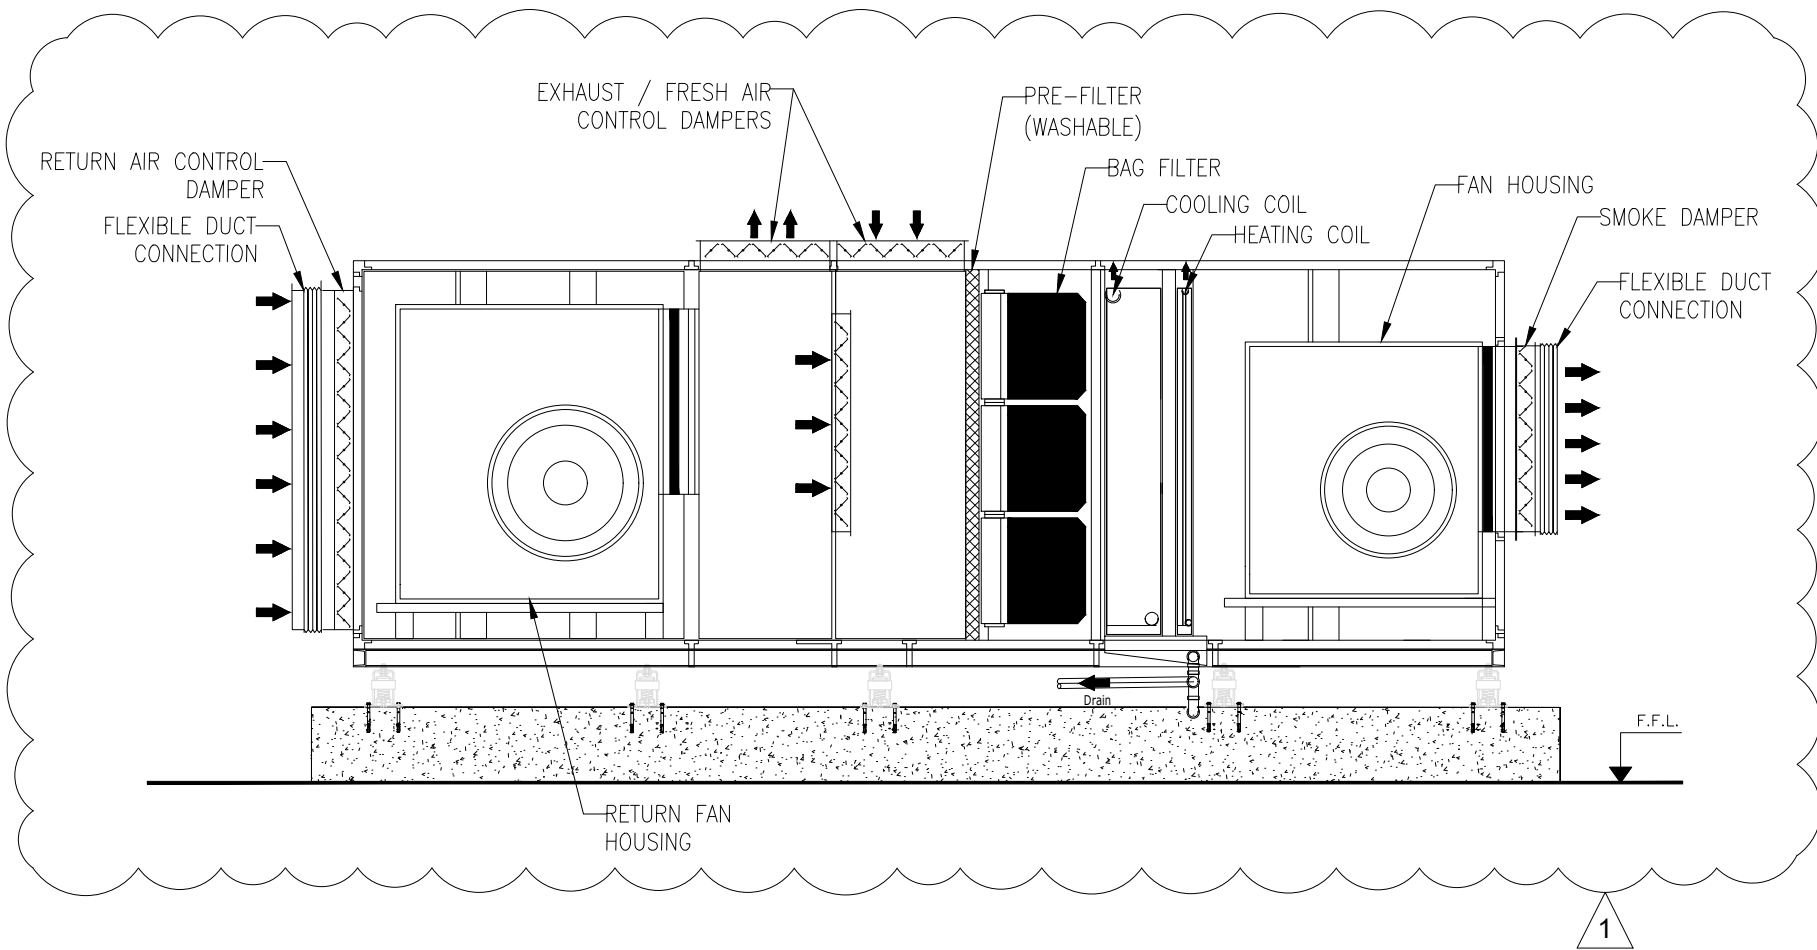

TYPICAL AHU INSTALLATION DETAILS
D 05 SCALE NTS

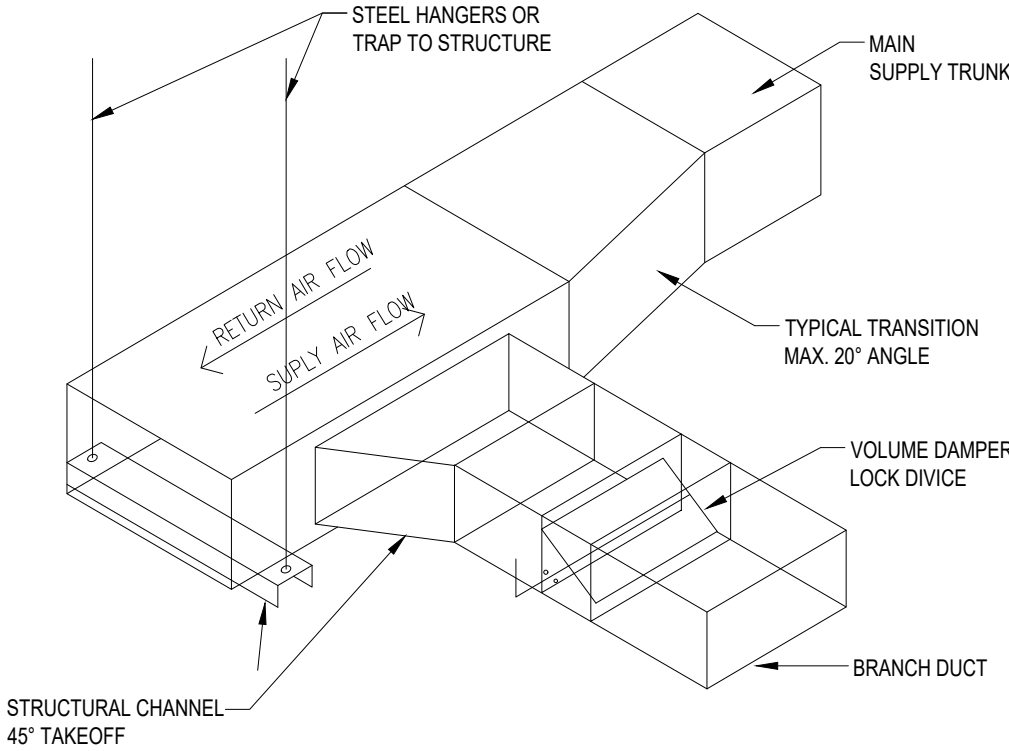


BRANCH DUCT TAKEOFF DETAIL
D 06 SCALE NTS

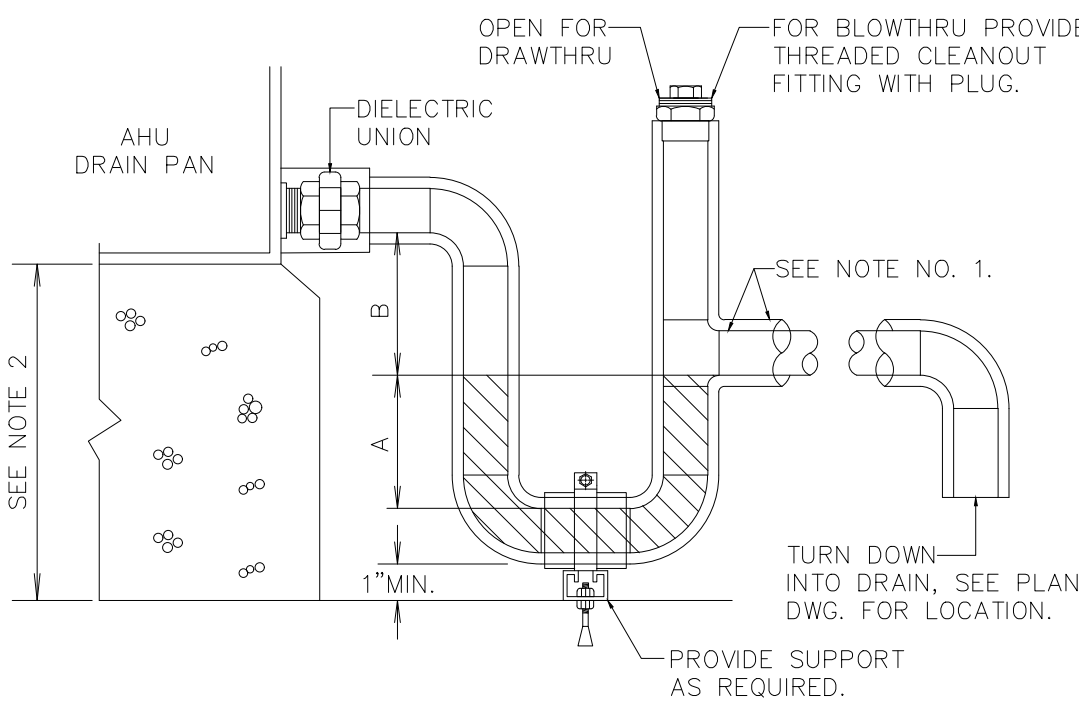


CONDENSATE DRAIN DETAIL
D 07 SCALE NTS

- BLOWTHRU:
A = GREATER OF 4" OR 1/2" PLUS AHU TOTAL PRESSURE IN INCHES-WC.
- DRAWTHRU:
B = GREATER OF 2" OR 1/2" PLUS AHU TOTAL PRESSURE IN INCHES-WC.
- NOTES:
1. REF. PLAN DWG'S FOR CONDENSATE DRAIN PIPE SIZE, (1"Ø MIN. AT EACH AHU DRAIN CONNECTION POINT). REF. SPECIFICATIONS FOR PIPE AND INSULATION MATERIAL REQUIREMENTS.
 2. PAD OR STANCHION HEIGHT DETERMINED BY SPACE REQD TO INSTALL TRAP, REF. PLAN DWG'S HEIGHT.

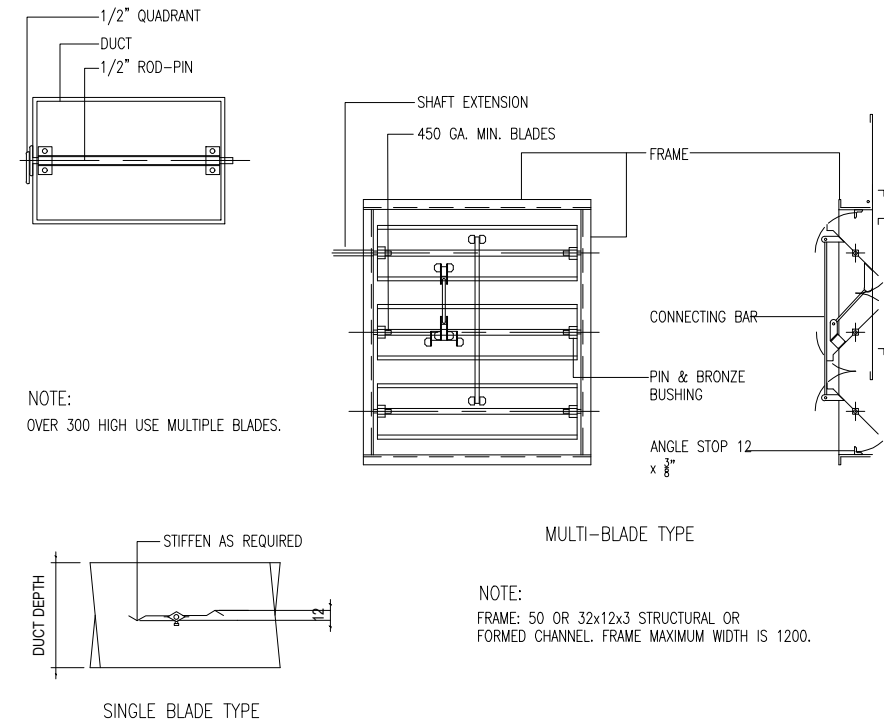


VOLUME DAMPER DETAIL
D 08 SCALE NTS

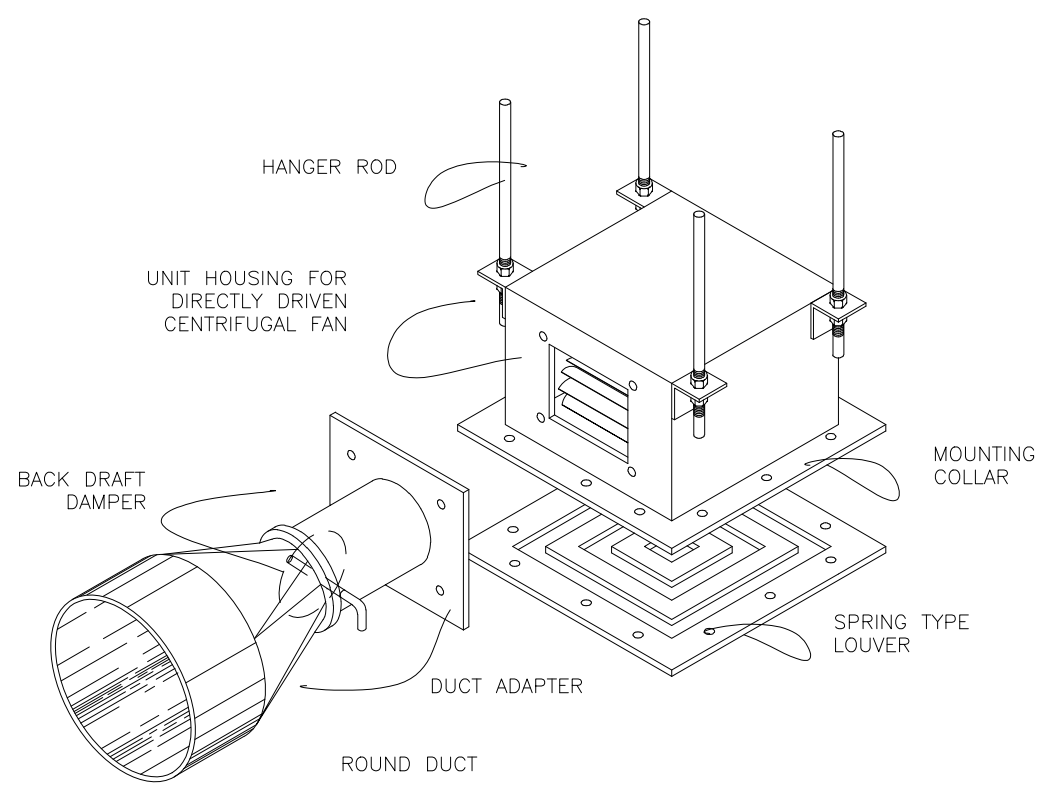


CEILING EXHAUST FAN DETAIL (ROUND)
D 09 SCALE NTS

REFER TO THE STRUCTURAL DRAWINGS FOR MOUNTING AND ATTACHMENT DETAILS.


DETAIL COMPLIES WITH FBC MECH : 301.12

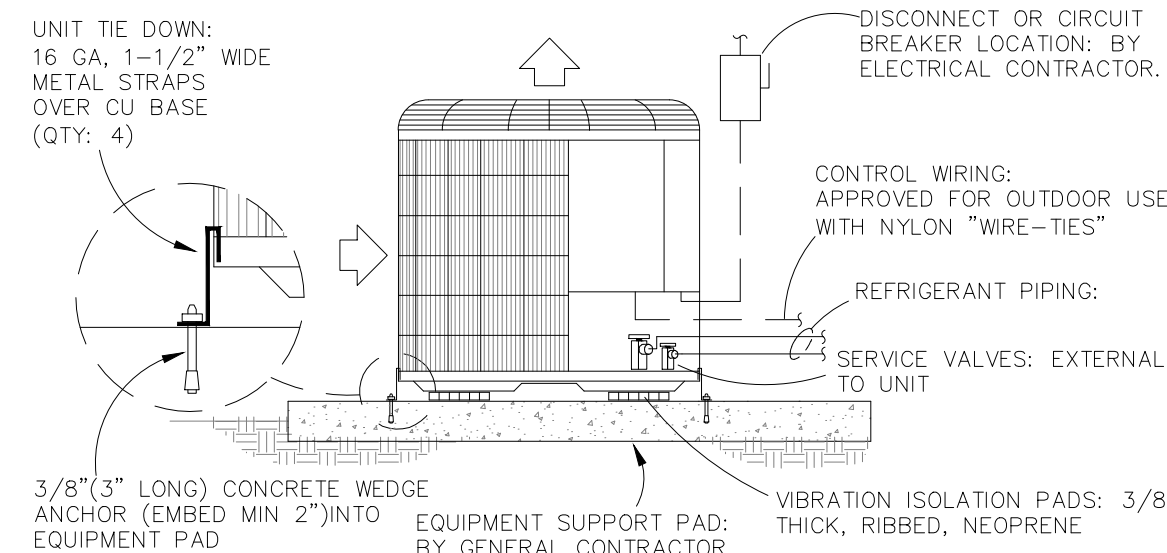


CONDENSER MOUNTING DETAIL
D 10 SCALE NTS

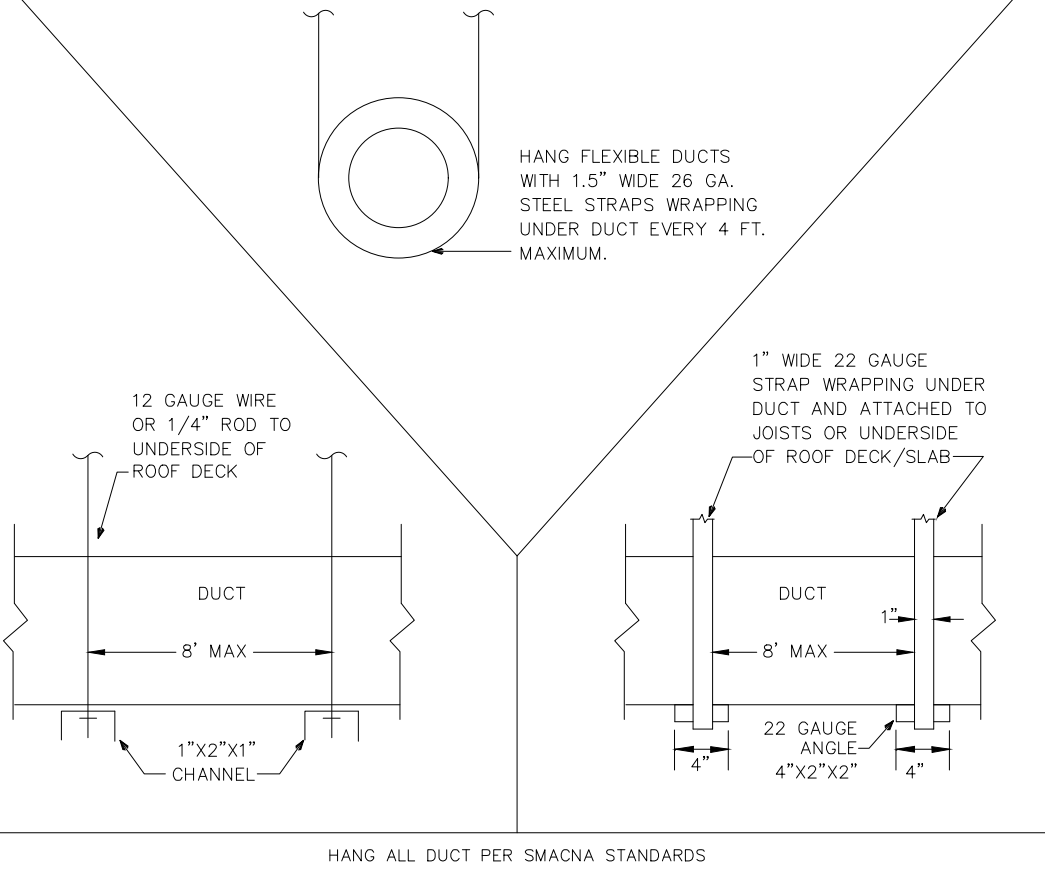


DUCT SUPPORT DETAIL
D 11 SCALE NTS

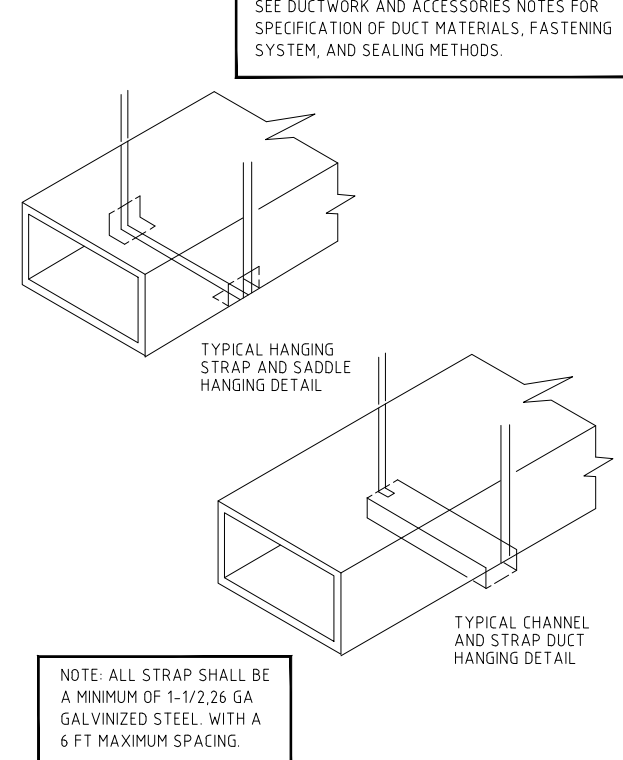

METHODS OF HANGING RIGID FIBERGLASS DUCT DETAIL
D 12 SCALE NTS

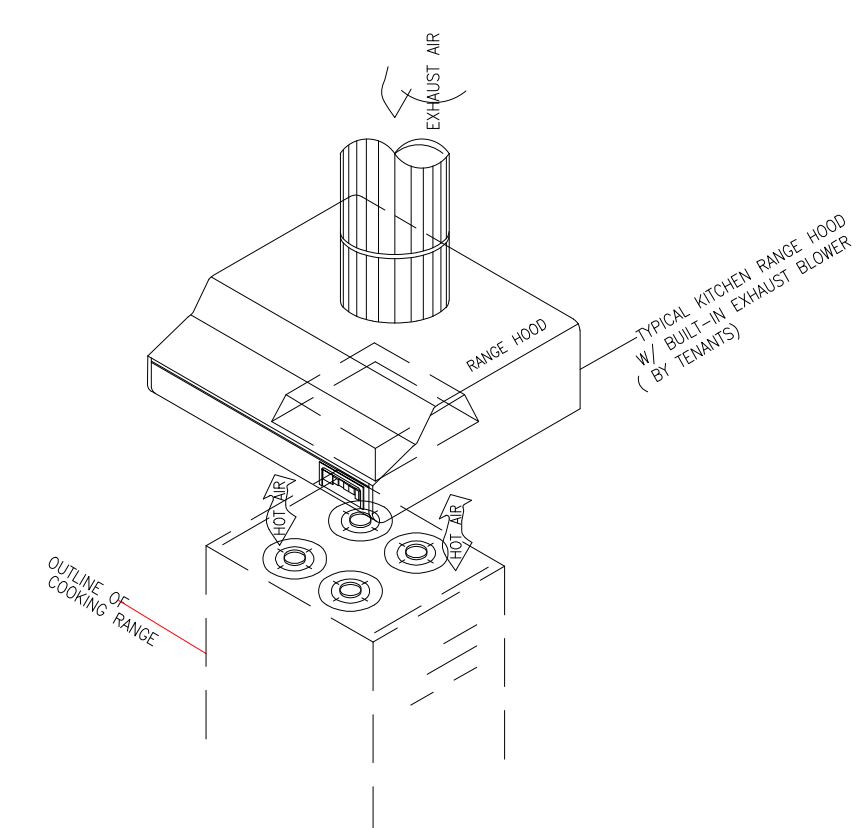

KITCHEN EXHAUST INSTALLATION DETAIL
D 13 SCALE NTS

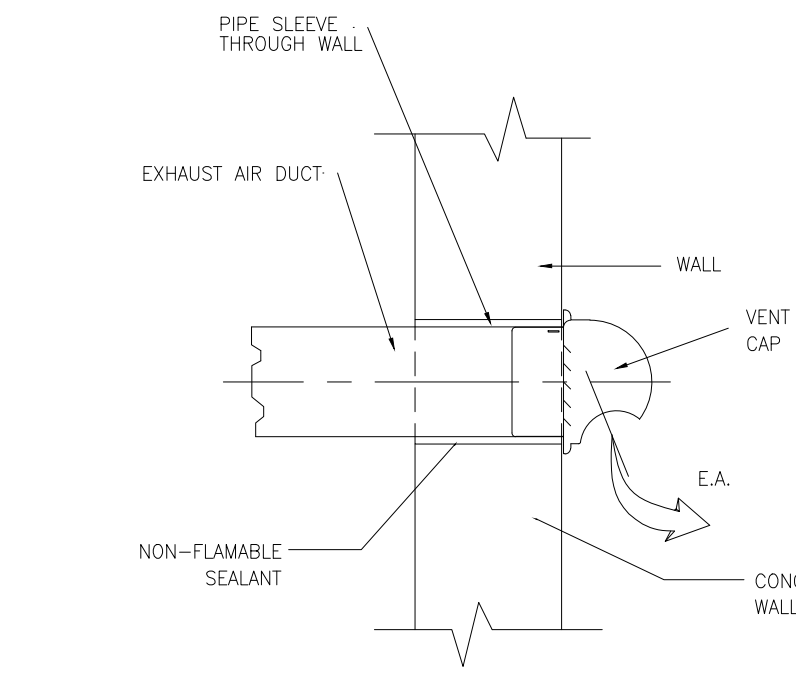

EXHAUST AIR VENT CAP DETAIL
D 14 SCALE NTS

OWNER SIGNATURE

REVISION STATUS			
Rev	DATE	DESCRIPTION	DRAWN BY
00	02-07-2023	ISSUED FOR APPROVAL	A.S
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS

APPROVED	(A)
APPROVED WITH NOTES	(B)
RESUBMIT	(C)
DISAPPROVED	(D)

OWNER:

ADDRESS:

5207 J STREET SACRAMENTO, CA

DESIGN CONSULTANT:

TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208 #13130
NEWARK, DELAWARE 19702
EMAIL: TS9DESIGNS@GMAIL.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

MECHANICAL

PROJECT TITLE:

CROWL BUILDING

DRAWING TITLE:

DETAILS

DRAWN BY: A.S	CHECKED BY: N.B	DATE: 02 JUL. 2023
JOB NO 632	SHT NO ME-04	SCALE: NTS