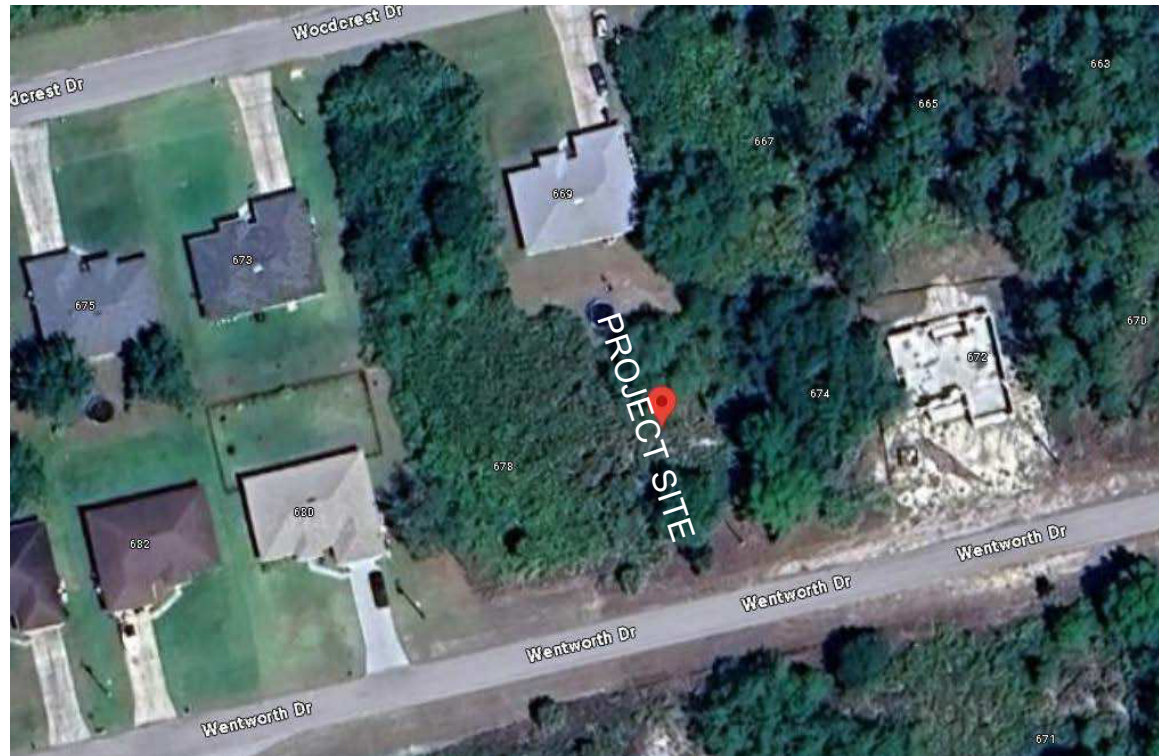
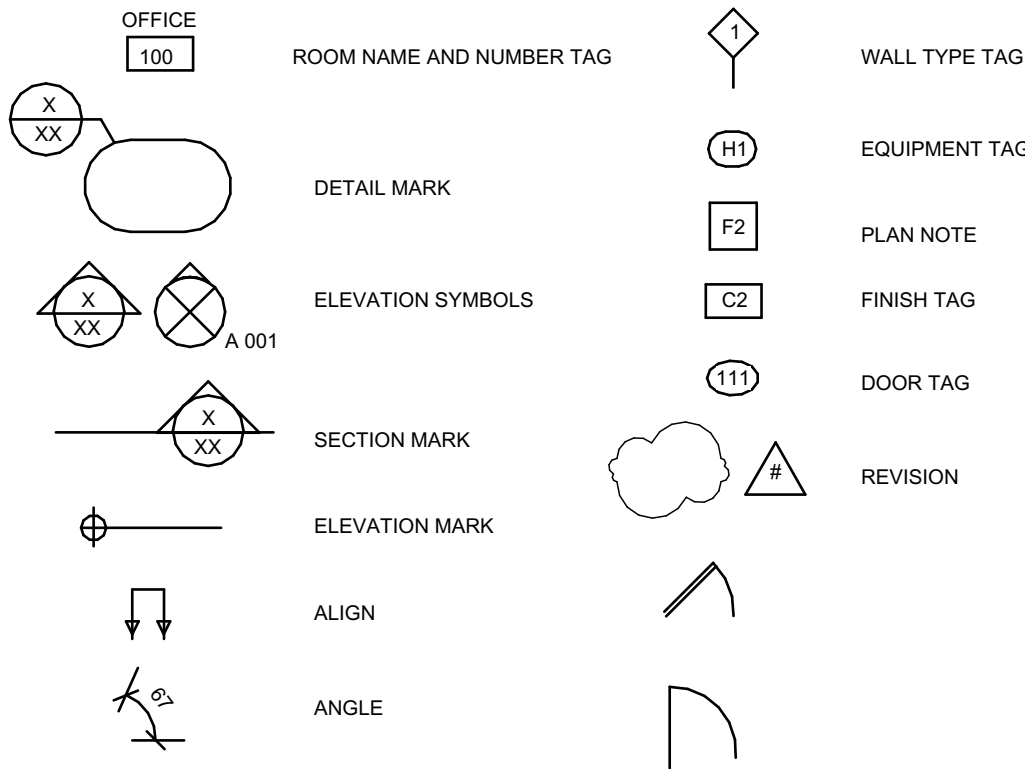


NEW CONSTRUCTION

SITE MAP



SHEET NOTES



BUILDING HEIGHT

TO PEAK 20'-8"

AREA

TOTAL SQ. FT. 1694.34 SQ.FT

INDEX TO DRAWINGS

SHEET NUMBER ARCHITECTURE

AR-0 COVER SHEET

AR-00 SITE DEVELOPMENT PLAN

AR-01 PROPOSED FLOOR PLAN

AR-02 EXTERIOR ELEVATIONS

AR-03 EXTERIOR ELEVATIONS

AR-04 DETAILS

AR-05 DETAILS

STRUCTURAL

ST01 NOTES

ST02 DETAILS

ST03 DETAILS

CLIMATE DESIGN

WIND SPEED (ULTIMATE) 165 MPH
WIND SPEED (NOMINAL) 128 MPH
RISK CATEGORY
WIND EXPOSURE

BUILDING ENVELOPE REQUIREMENTS:
EXTERIOR WALLS R19
ROOF R30
FLOOR R11

WINDOWS:
U-VALUE 0.40
SHGC 0.24

DEFERRED SUBMITTALS

TRUSS PACKAGE SOILS
REPORT

OWNER SIGNATURE

REVISION STATUS

REV	DATE	DESCRIPTION	DRAWN BY
00	03/12/2024		
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS

APPROVED	
APPROVED WITH NOTES	
RESUBMIT	
DISAPPROVED	

OWNER:

ADDRESS:

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD,STE 208.13130
NEWARK,DELAWARE 19702
EMAIL:NADIF@TS9DESIGNS.COM

DRAWING STATUS:


DESIGN DRAWING

DISCIPLINE: ARCHITECTURE

PROJECT TITLE:
RESIDENTIAL

DRAWING TITLE:
PROPOSED FLOOR PLAN

DRAWN BY: D.M	CHECKED BY: N.B	DATE: 28/10/2024
JOB NO:	SHT NO: AR-0	SCALE:

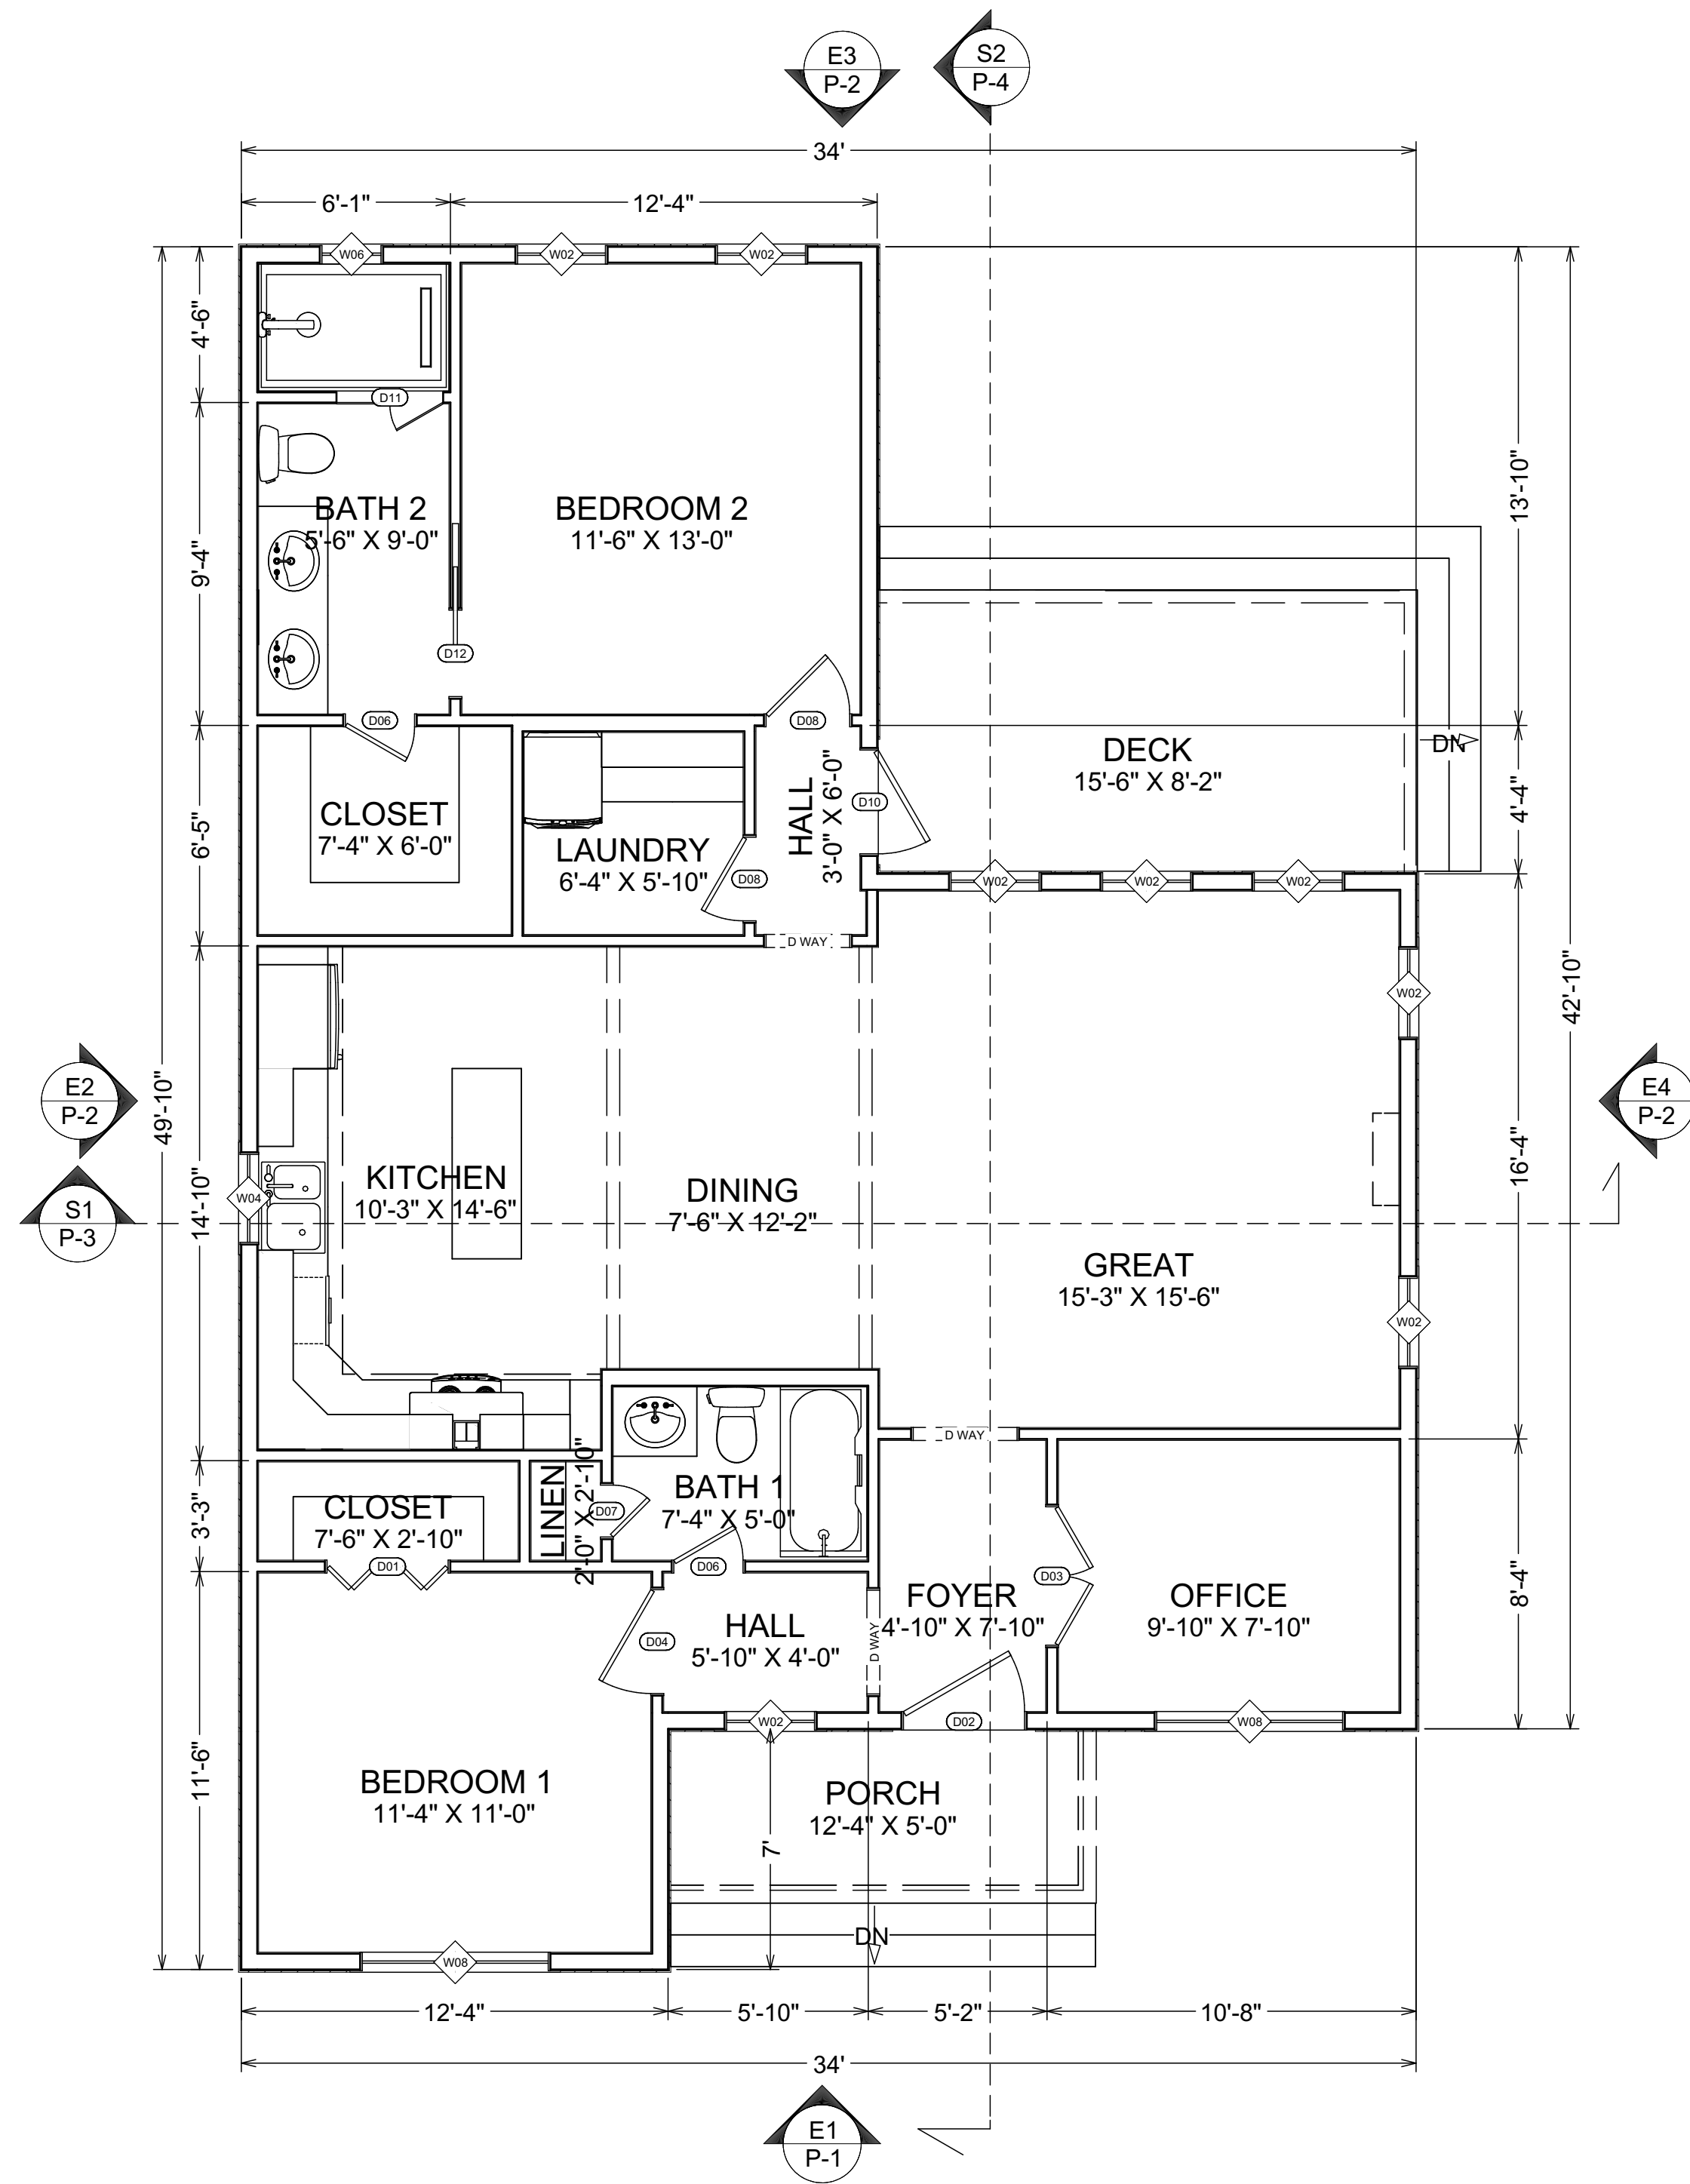

AR 01 PROPOSED FLOOR PLAN
SCALE 1/2"=1'-0"

OWNER SIGNATURE

REVISION STATUS			
REV	DATE	DESCRIPTION	DRAWN BY
00	03/12/2024		
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	
APPROVED WITH NOTES	
RESUBMIT	
DISAPPROVED	
OWNER:	

ADDRESS:

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD,STE 208.13130
NEWARK,DELAWARE 19702
EMAIL:NADIF@TS9DESIGNS.COM

DRAWING STATUS:		
DESIGN DRAWING		
DISCIPLINE:		
ARCHITECTURE		
PROJECT TITLE:		
RESIDENTIAL		

DRAWING TITLE:

FLOOR PLAN SHEET

DRAWN BY:	CHECKED BY:	DATE:
D.M	N.B	03/12/2024
JOB NO:	SHT NO:	SCALE:



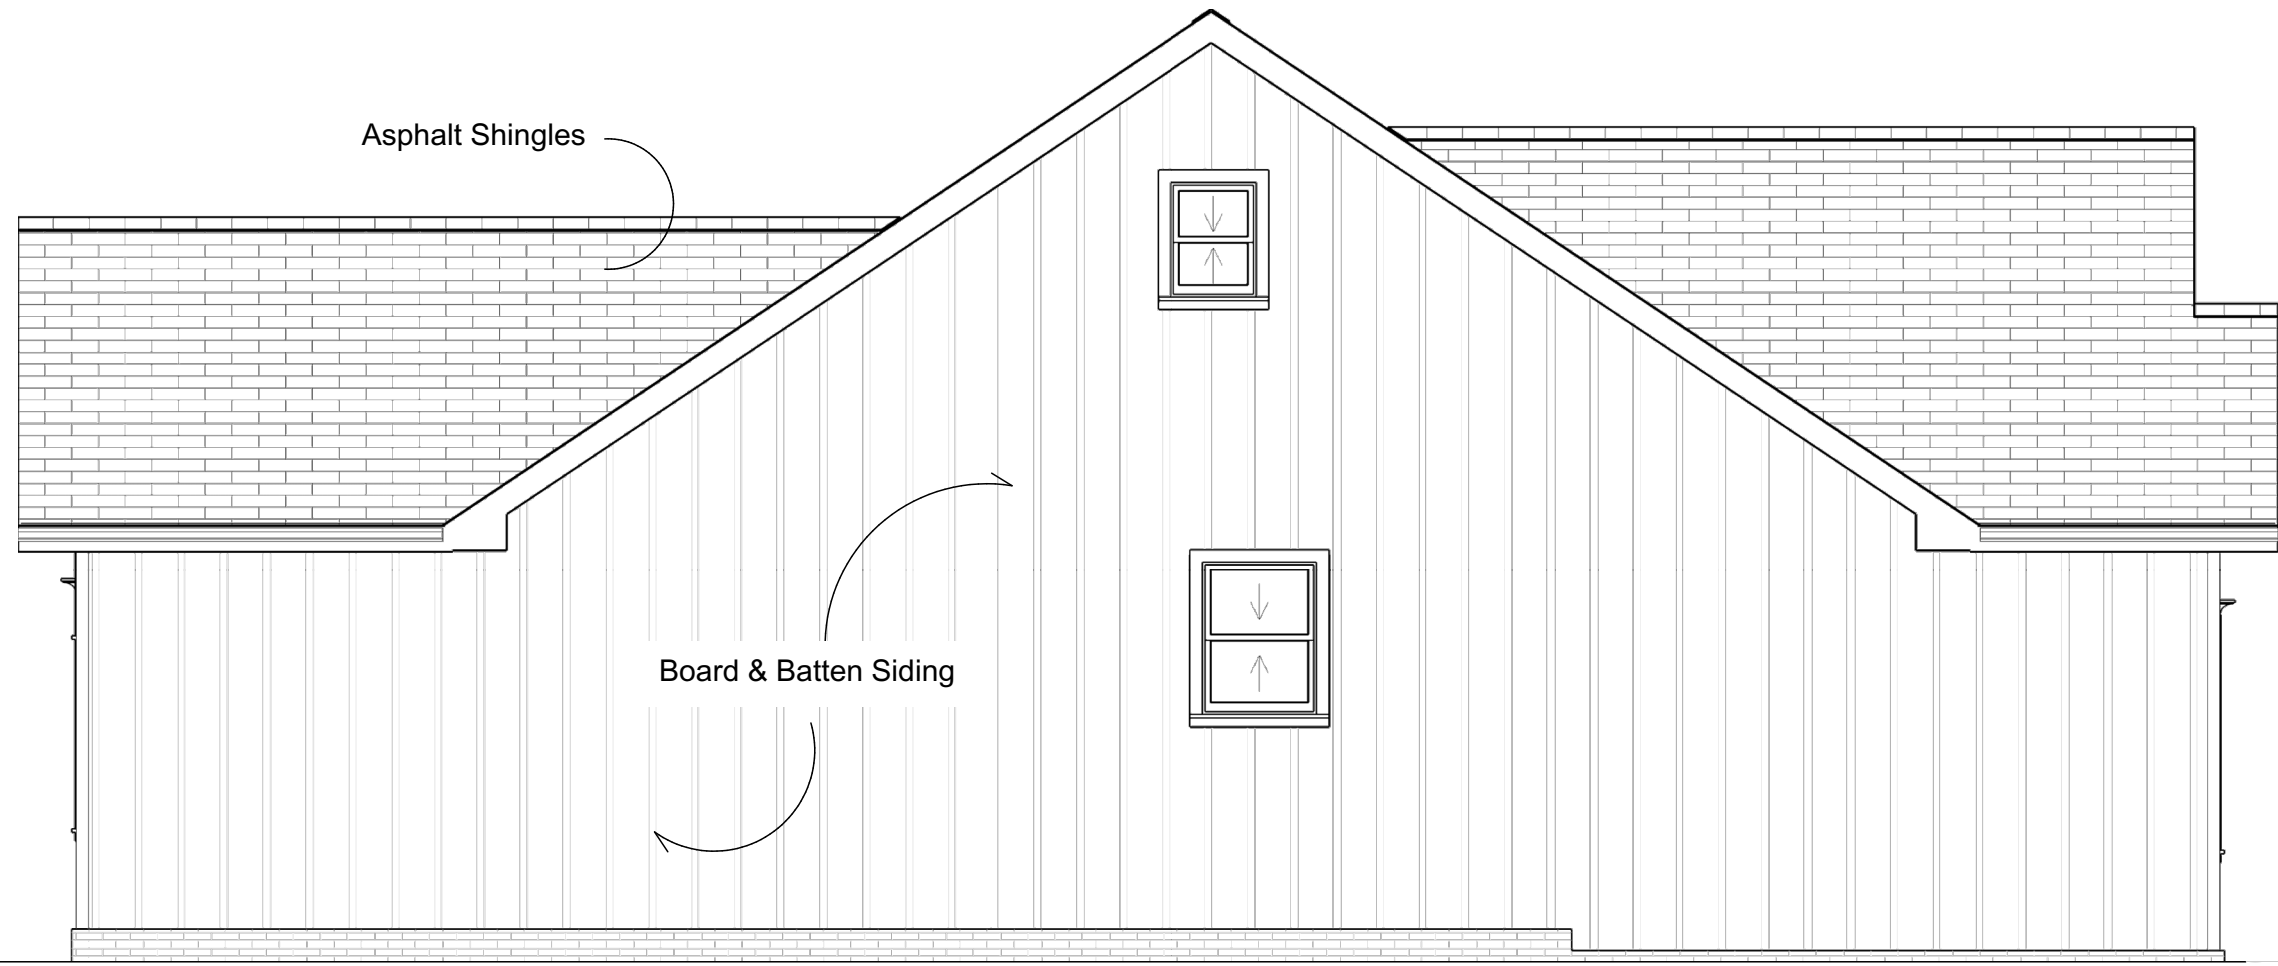
AR
02
SCALE
1/4"=1'-0"

FRONT ELEVATION



AR
03
SCALE
1/4"=1'-0"

RIGHT ELEVATION



AR
04
SCALE
1/2"=1'-0"

LEFT ELEVATION



AR
05
SCALE
1/4"=1'-0"

REAR ELEVATION

OWNER SIGNATURE

REVISION STATUS			
REV	DATE	DESCRIPTION	DRAWN BY
00	03/12/2024		
01			
02			
03			
04			


CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	
APPROVED WITH NOTES	
RESUBMIT	
DISAPPROVED	
OWNER:	

ADDRESS:

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD,STE 208.13130
NEWARK,DELAWARE 19702
EMAIL:NADIF@TS9DESIGNS.COM

DRAWING STATUS:
DESIGN DRAWING
DISCIPLINE:
ARCHITECTURE
PROJECT TITLE:
RESIDENTIAL
DRAWING TITLE:
ELEVATION SHEET

DRAWN BY:	CHECKED BY:	DATE:
D.M	N.B	03/12/2024
JOB NO:	SHT NO:	SCALE:

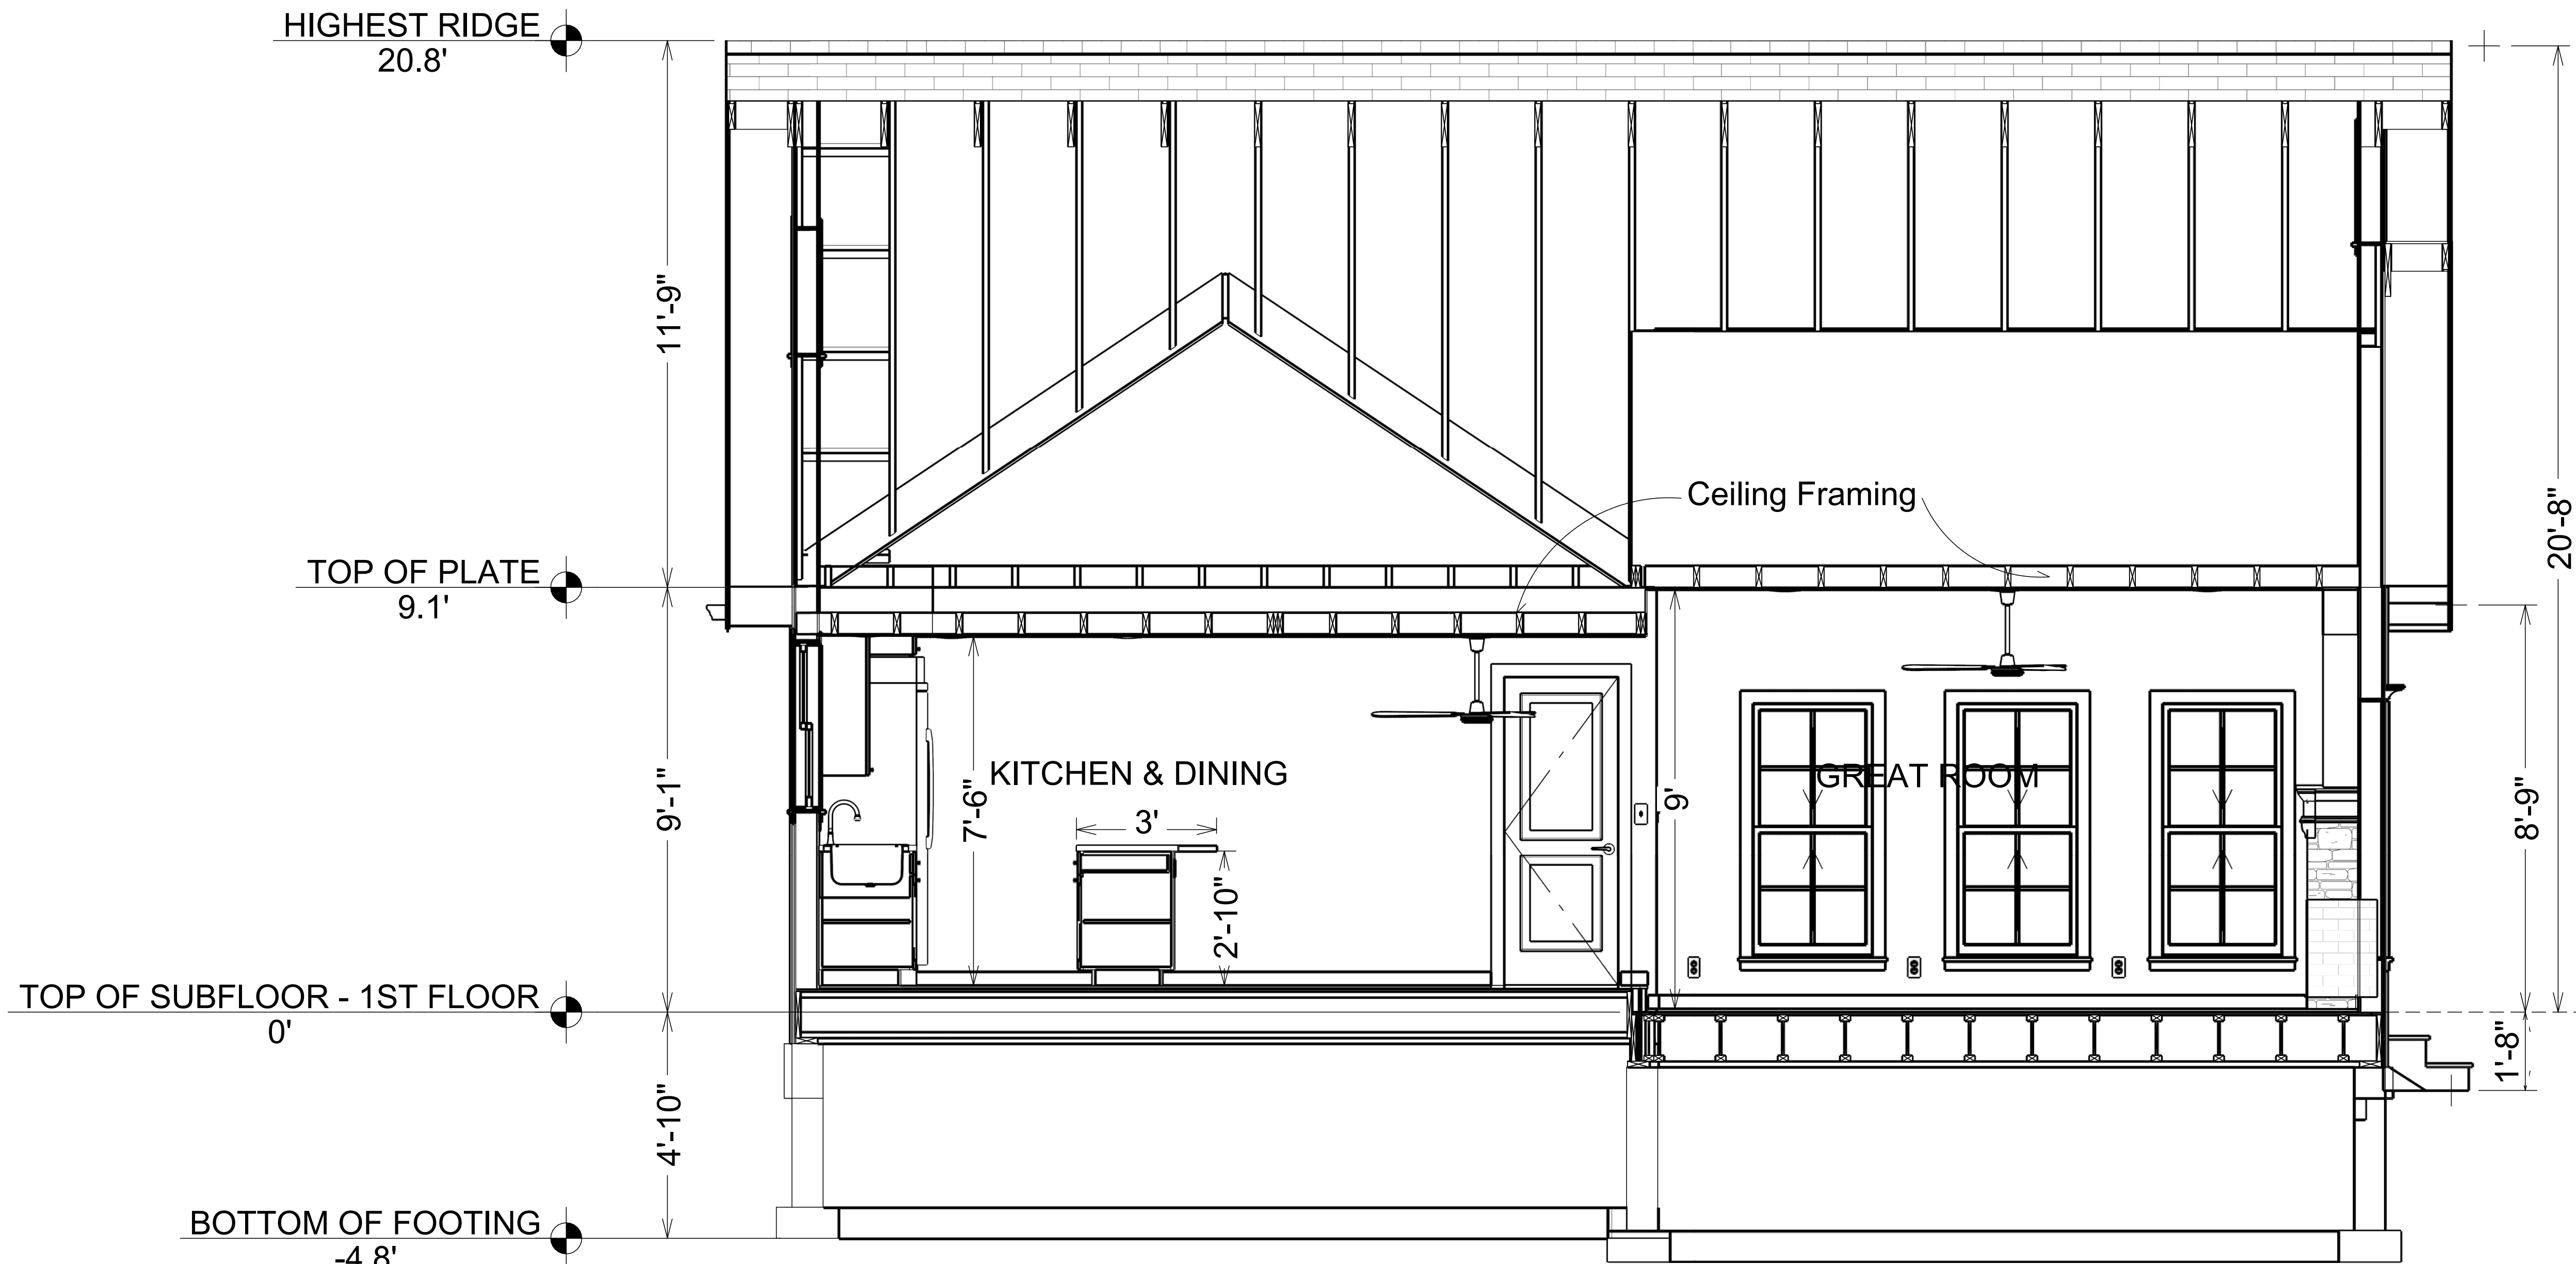

AR
06

SECTION-S1

SCALE

1/2"=1'-0"

OWNER SIGNATURE

REVISION STATUS			
REV	DATE	DESCRIPTION	DRAWN BY
00	03/12/2024		
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	
APPROVED WITH NOTES	
RESUBMIT	
DISAPPROVED	

OWNER:

ADDRESS:

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD, STE 208.13130
NEWARK, DELAWARE 19702
EMAIL: NADIF@TS9DESIGNS.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

ARCHITECTURE

PROJECT TITLE:

RESIDENTIAL

DRAWING TITLE:

SECTION SHEET

DRAWN BY:	CHECKED BY:	DATE:
D.M	N.B	03/12/2024
JOB NO:	SHT NO:	SCALE:



OWNER SIGNATURE

REVISION STATUS			
REV	DATE	DESCRIPTION	DRAWN BY
00	03/12/2024		
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	
APPROVED WITH NOTES	
RESUBMIT	
DISAPPROVED	

OWNER:

ADDRESS:

DESIGN CONSULTANT:

TSABA CORP
NADIF BRACEY
254 CHAPMAN RD,STE 208.13130
NEWARK,DELAWARE 19702
EMAIL:NADIF@TS9DESIGNS.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

ARCHITECTURE

PROJECT TITLE:

RESIDENTIAL

DRAWING TITLE:

SECTION SHEET

DRAWN BY:	CHECKED BY:	DATE:
D.M	N.B	03/12/2024
JOB NO:	SHT NO:	SCALE:

SLOPE CRAWL SPACE TO DRAIN. MAXIMUM SLOPE IS 2 HORIZ., 1 VERT. BETWEEN FOOTINGS AT DIFFERENT ELEVATIONS.


CONCRETE STRENGTH,
3,000 PSI AT 28 DAYS FOR ALL SLABS. (FOUNDATION DESIGN
BASED ON 2,500 PSI).
3,000 PSI AT 28 DAYS FOR ALL OTHER CONDITION.
MAXIMUM SLUMP, 4"

CONCRETE EXPASION ANCHORS SHALL BE 'SIMPSON WEDGE-ALL STUD ANCHORS' OR ENGINEER APPROVED EQUAL. EPOXY TO BE SIMPSON "SET" ADHESIVE OR APPROVED EQUAL.


- * JOINTS AROUND WINDOW AND DOOR FRAMES
- * JOINTS BETWEEN WALL CAVITY AND WINDOW/DR. FME.
- * JOINTS BETWEEN WALL AND FOUNDATION
- * JOINTS BETWEEN WALL AND ROOF
- * JOINTS BETWEEN WALL PANELS
- * UTILITY PENETRATIONS THROUGH EXTERIOR WALLS



DRAWN BY:	CHECKED BY:	DATE:
D.M	N.B	03/12/2024
JOB NO:	SHT NO:	SCALE:

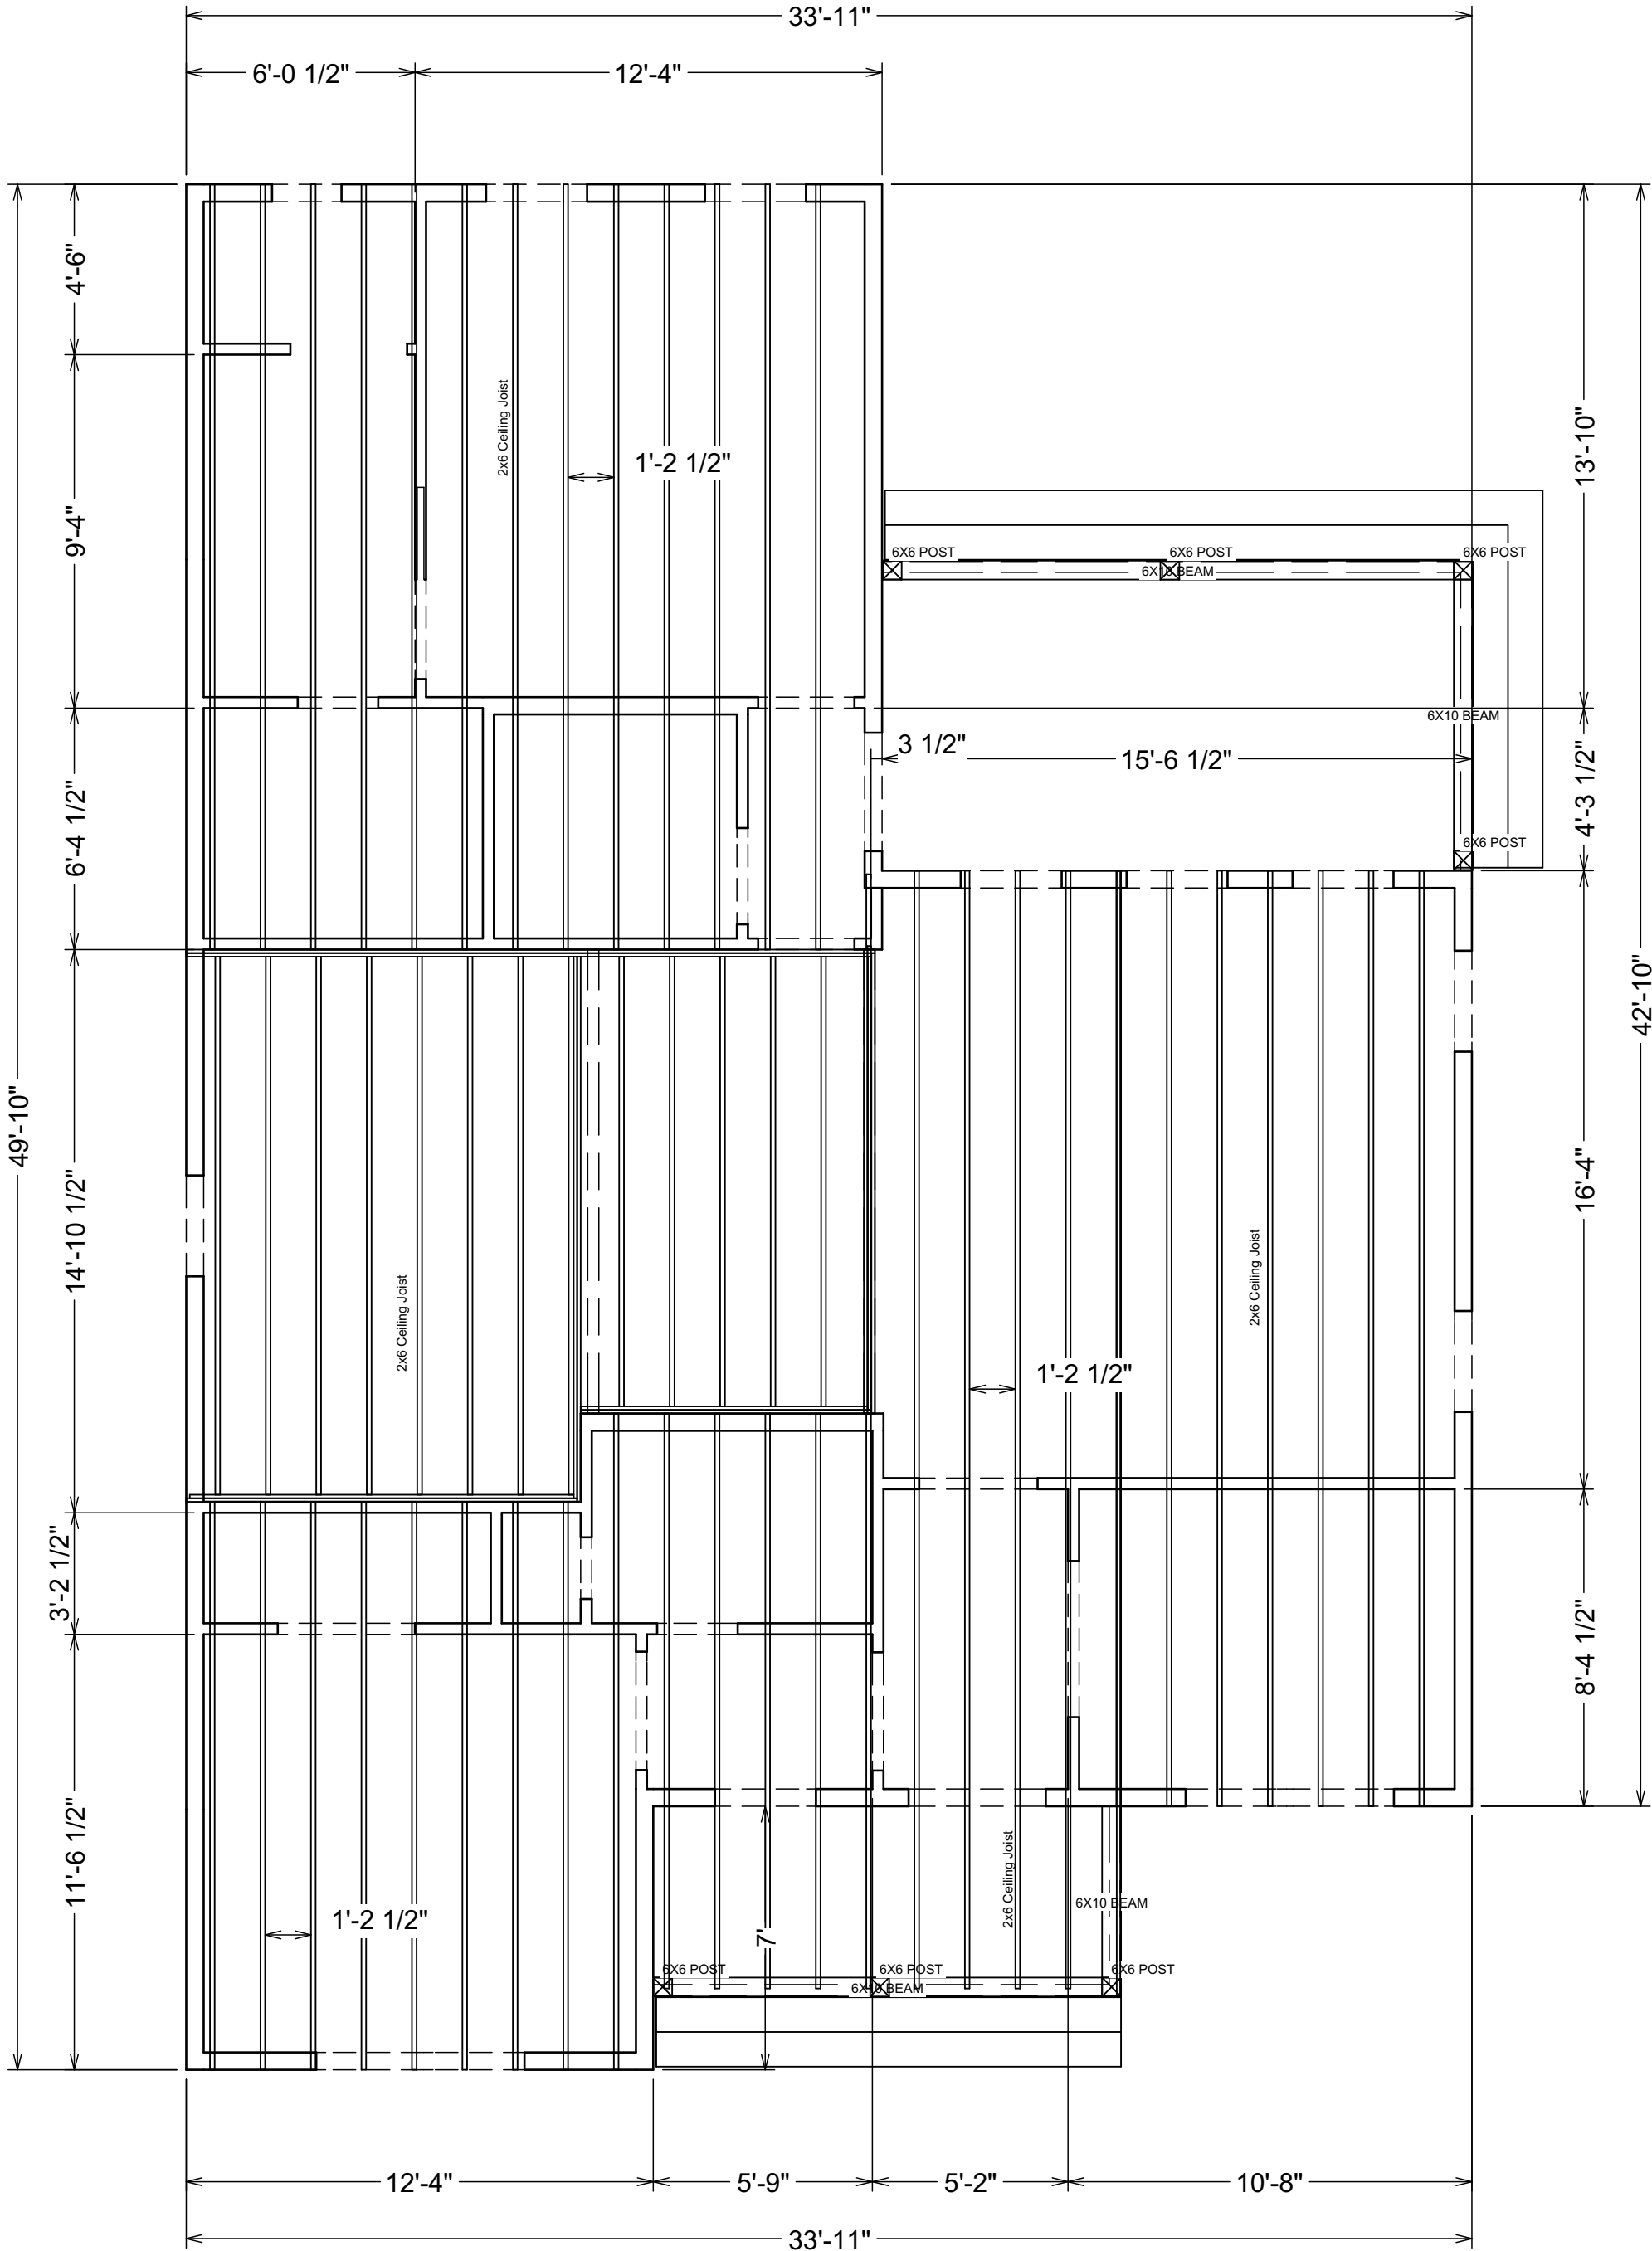

1 Typical CMU Crawl Space.

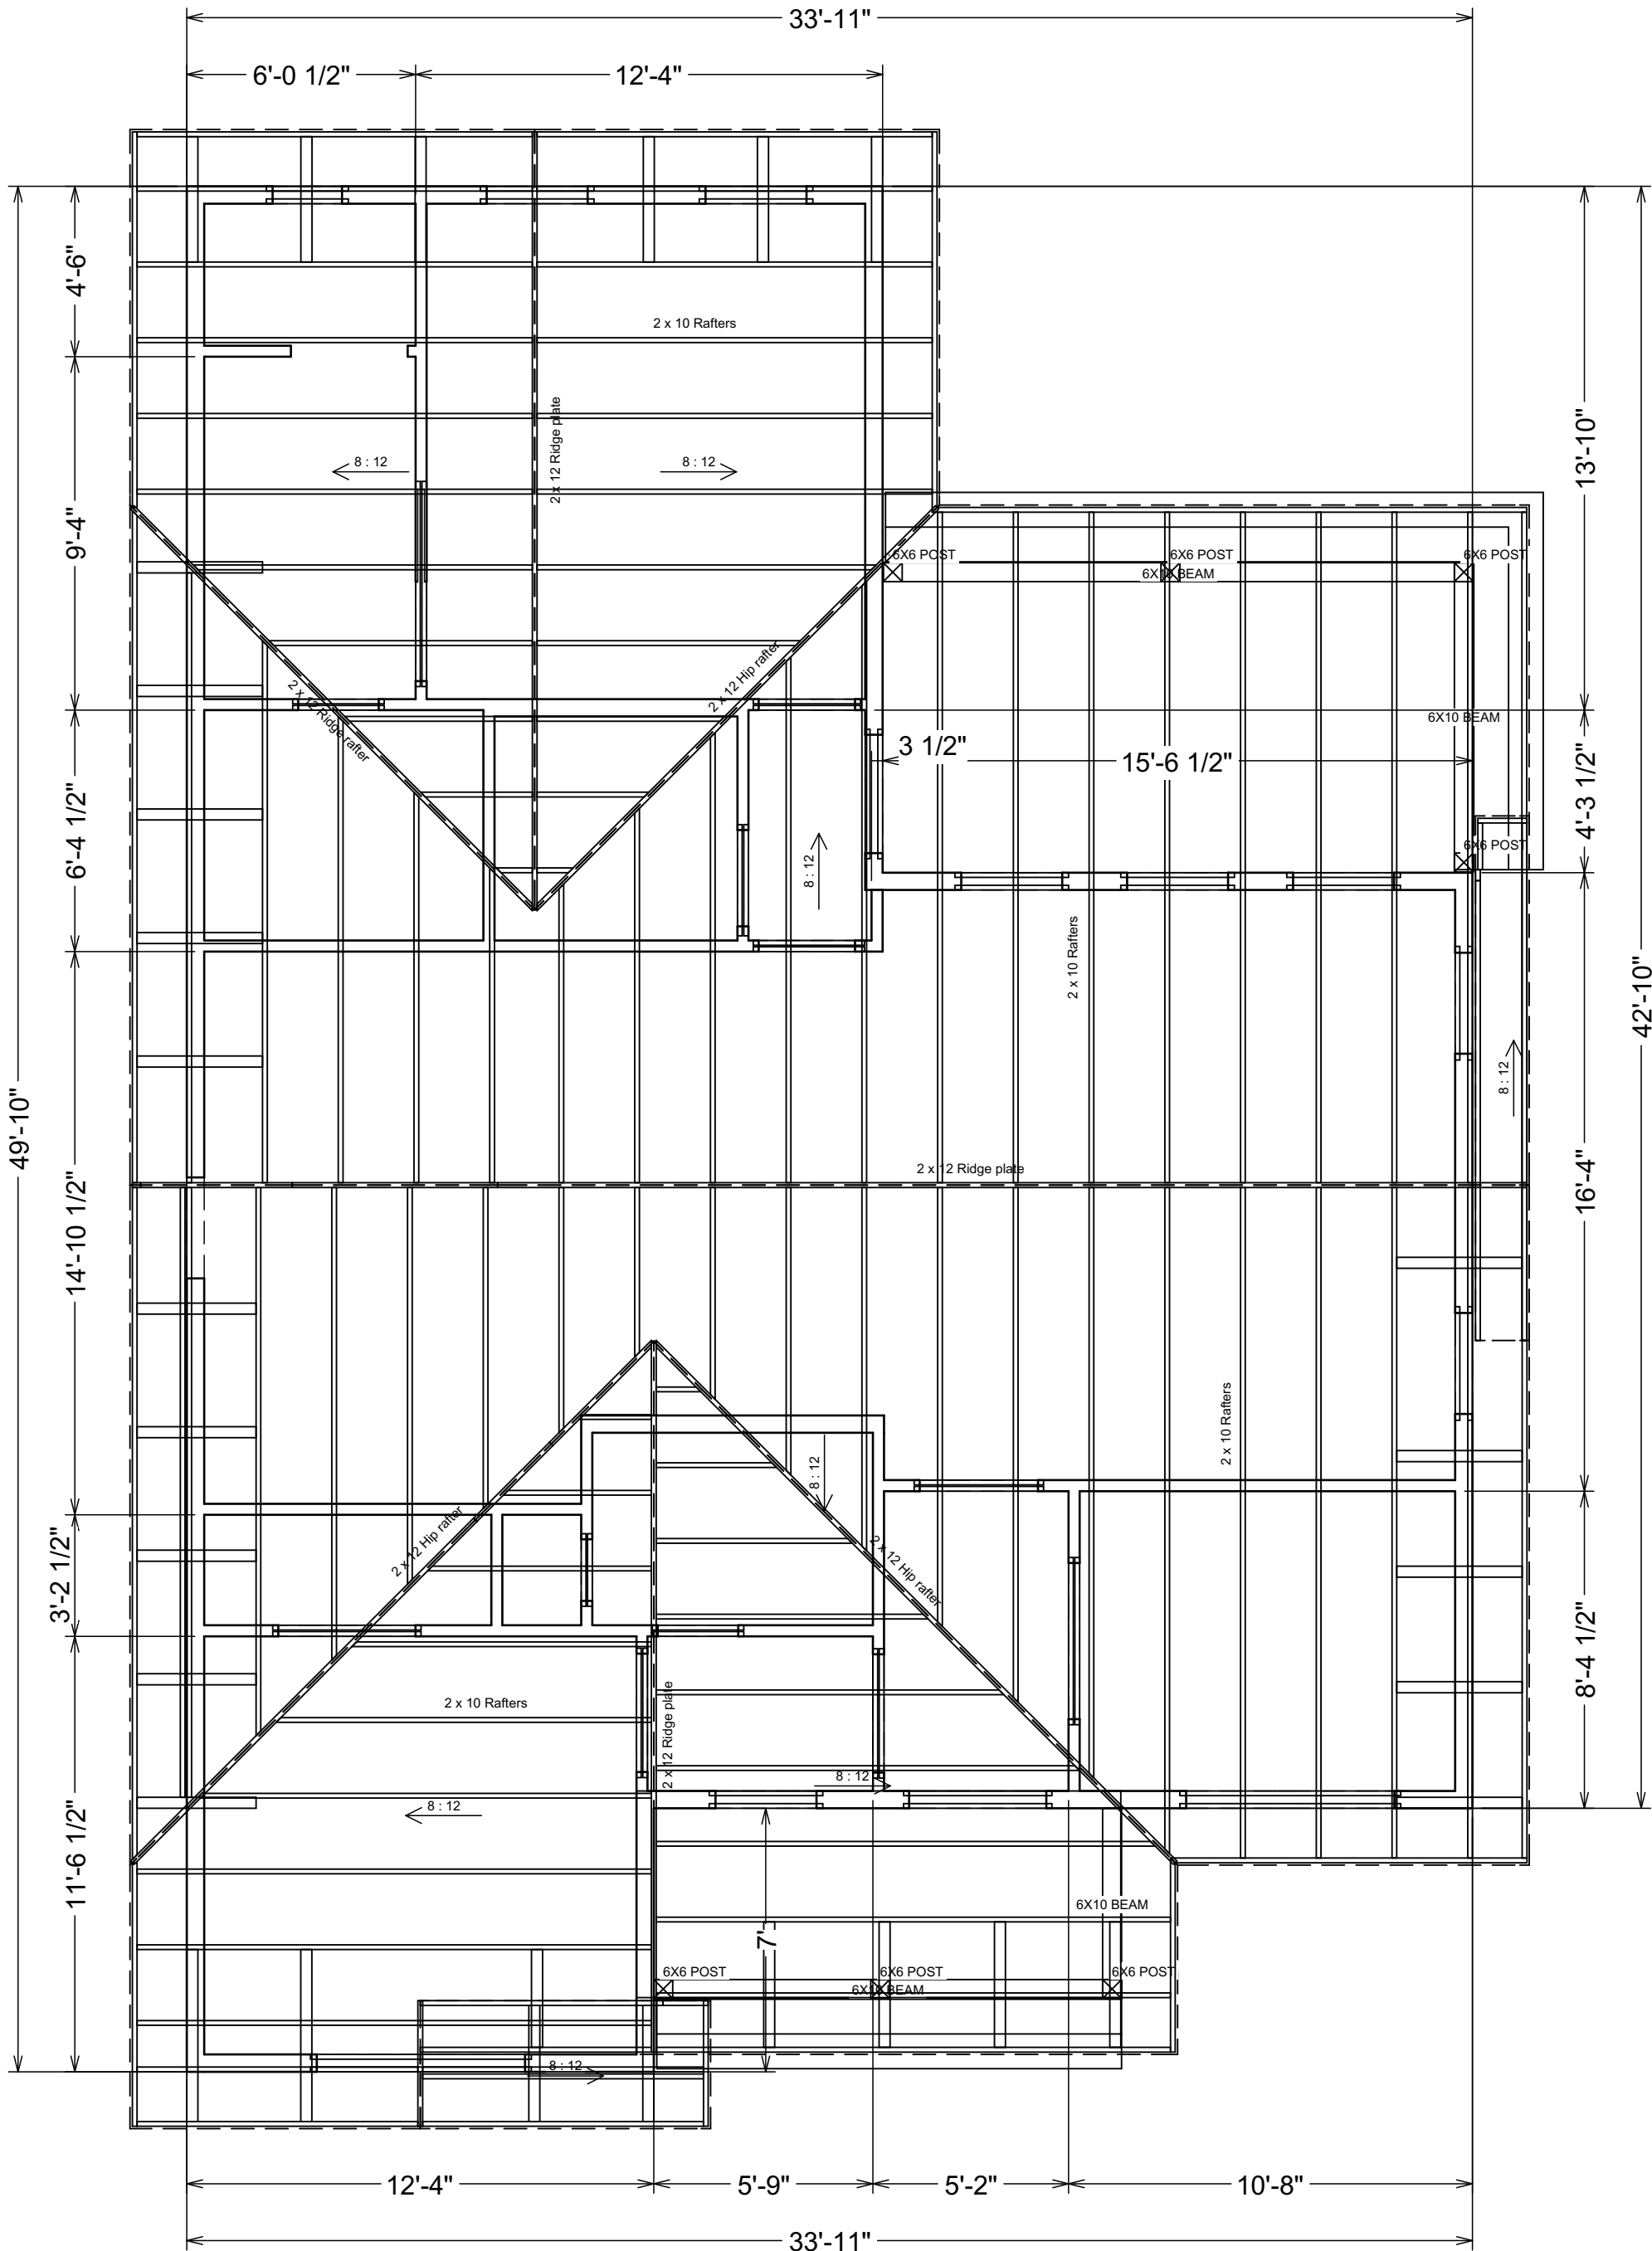

1 Framing, Roof Plan View.

ROOF FRAMING / TRUSS NOTES:

TRUSS DRAWING IS FOR ILLUSTRATION ONLY. ALL TRUSSES SHALL BE INSTALLED & BRACED TO MANUFACTURERS DRAWINGS & SPECIFICATIONS.

ALL TRUSSES SHALL CARRY MANUFACTURERS STAMP.

ALL TRUSSES WILL NOT BE FIELD ALTERED WITHOUT PRIOR BUILDING DEPT. APPROVAL OF ENGINEERING CALCULATIONS.

ALL TRUSSES SHALL HAVE DESIGN DETAILS & DRAWINGS ON SITE FOR FRAMING INSPECTION.

ALL CONNECTIONS OF RAFTERS, JACK OR HIP TRUSSES TO MAIN GIRDER TO BE PROVIDED BY TRUSS MANUFACTURER.

ALL ROOF FRAMING 24" O.C.

ALL OVERHANGS 16".

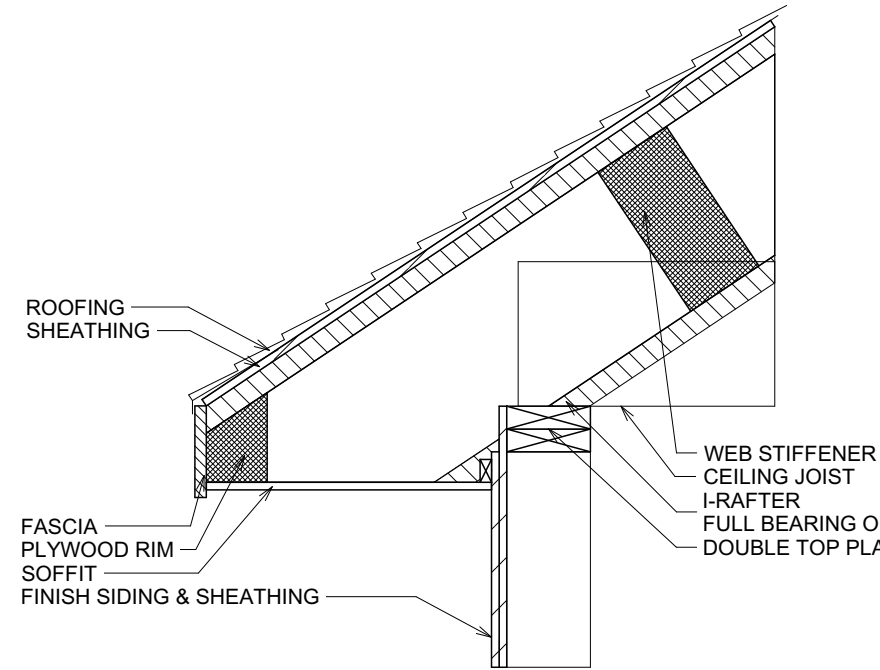
INSTALL POLYISOCYANURATE FOAM TYPE INSULATION AT FLOOR AND PLATE LINES, OPENINGS IN PLATES, CORNER STUD CAVITIES AND AROUND DOOR AND WINDOW ROUGH OPENING CAVITIES.

ATTIC VENTILATION: REQUIRED ABOVE HOUSE.

MIN. SNOW LOAD 50 LBS PER SQUARE FOOT.

WALL HEADERS: (2) 2 X 10 DF 2 TYP. UNO

ROOF & FLOOR TRUSS MANUFACTURER: _____



2 Soffited Eave Details.

OWNER SIGNATURE

REVISION STATUS			
REV	DATE	DESCRIPTION	DRAWN BY
00	03/12/2024		
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	
APPROVED WITH NOTES	
RESUBMIT	
DISAPPROVED	

OWNER:

ADDRESS:

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD,STE 208.13130
NEWARK,DELAWARE 19702
EMAIL:NADIF@TS9DESIGNS.COM

DRAWING STATUS:


DESIGN DRAWING

DISCIPLINE: ARCHITECTURE

PROJECT TITLE: RESIDENTIAL

DRAWING TITLE: ROOF & CEILING FRAMING.

DRAWN BY:	CHECKED BY:	DATE:
D.M	N.B	03/12/2024
JOB NO:	SHT NO:	SCALE:

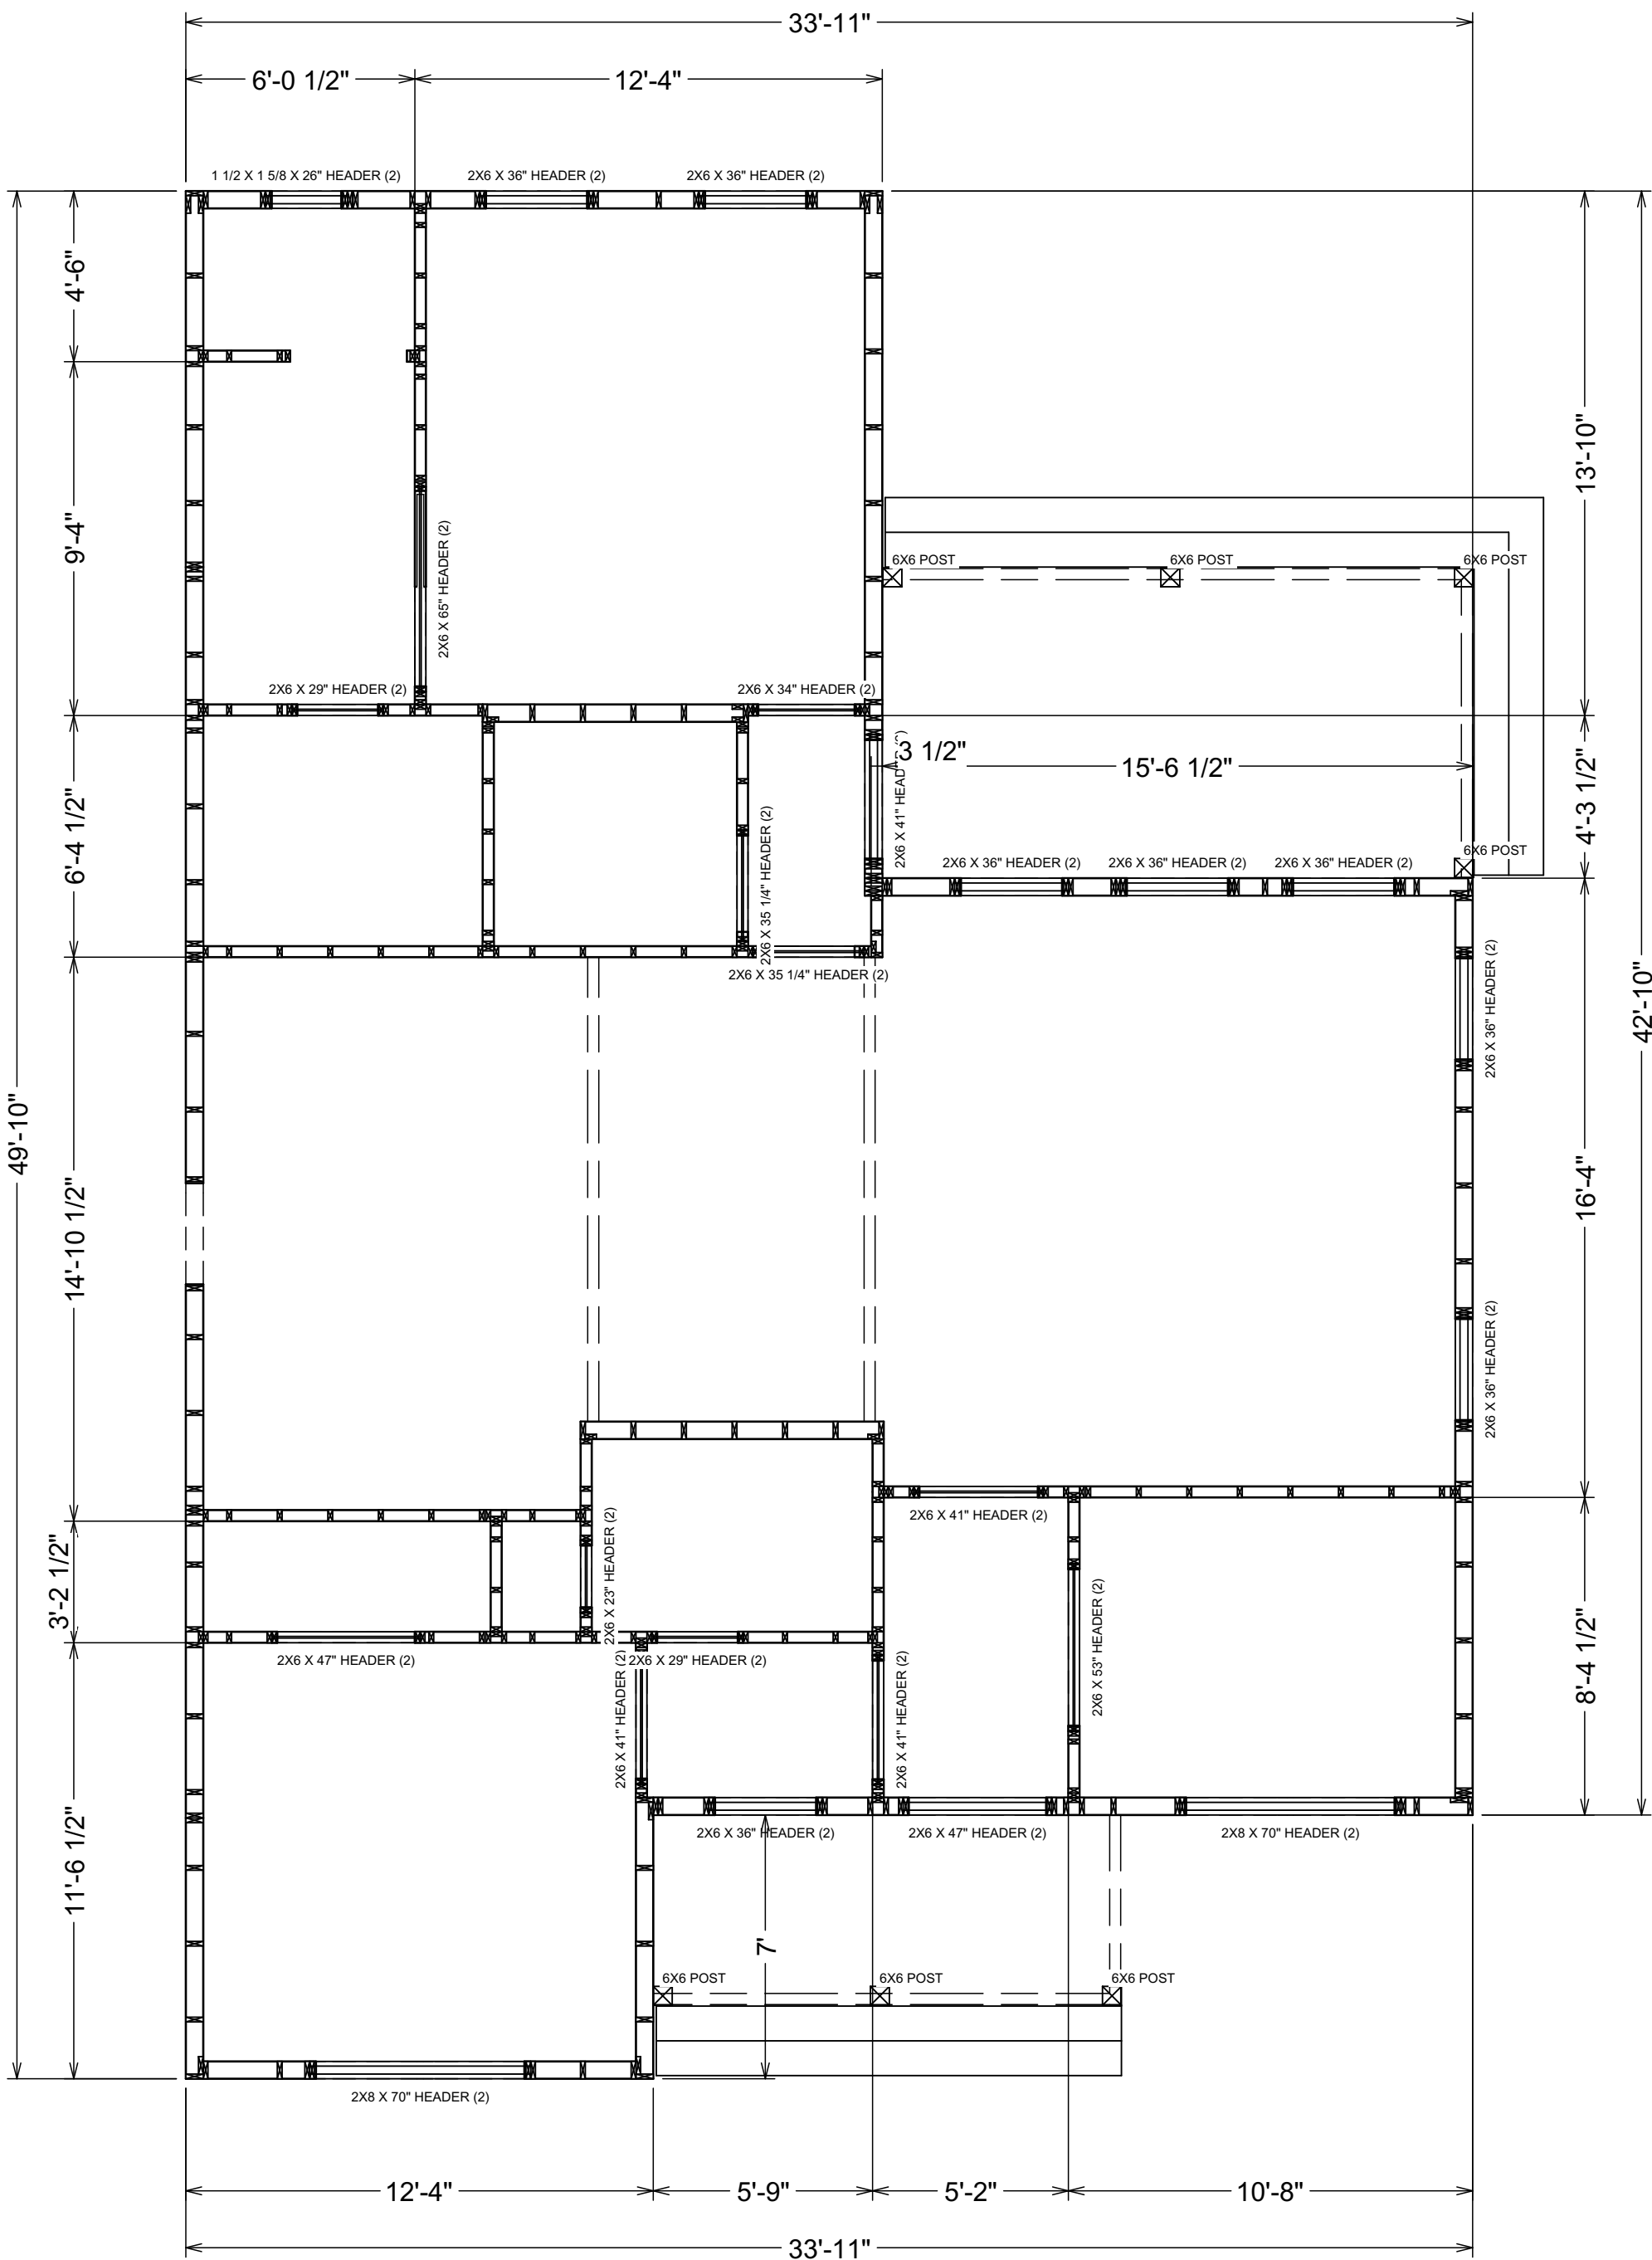

FRAMING NOTES:

PROVIDE DOUBLE JSTS. UNDER ALL WALLS RUNNING PARALLEL TO JOISTS.

PROVIDE POSITIVE VENTILATION AT EA. END OF EA. RAFTER SPACE AT VAULTED CEILING AREAS.

PROVIDE FIRE BLOCKING, DRAFT STOPS AND FIRE STOPS AS PER I.B.C. SEC. R502.12.

PROVIDE POSITIVE CONECTIONS AT EACH END OF ALL POSTS AND COLUMNS TO RESIST LATERAL DISPLACEMENT.

NAILING NOTES: (PER IRC TABLE R602.3(1)).

JOIST TO SILL OR GIRDER
BRIDGING TO JOIST
SOLE PLATE TO JOIST OR BLK'G
STUD TO SOLE PLATE
TOP PLATE TO STUD

DOUBLE STUDS
DOUBLE TOP PLATES
CONTINUOUS HEADER, TWO PIECES
BUILT-UP HEADER, TWO PIECES
W/ 1/2" SPACER
TOP PLATES, LAPS AND INTERSECTIONS

CEILING JOISTS TO PLATE
CONTINUOUS HEADER TO STUD
CEILING JOISTS, LAPS OVER PARTITIONS
CEILING JOISTS TO PARALLEL RAFTERS
RAFTER TO PLATE
1" BRACE TO EACH STUD AND PLATE
BUILT-UP CORNER STUDS
2" PLANKS

1/2" PLYWOOD ROOF AND WALL
SHEATHING

3/4" PLYWOOD SUBFLOOR

2x MULTIPLE JOISTS - STAGGER @ 15" OC
W/(2) @ EA. END OR SPLICE
(3) OR FEWER
(4) OR MORE

TOE NAIL (3)-8d
TOE NAIL EA. END (2)-8d
FACE NAIL 16d @ 16"OC
TOE NAIL (4)-8d, END NAIL (2) 16d
END NAIL (2)-16d

FACE NAIL 16d @ 24" OC
FACE NAIL 16d @ 16" OC
16d @ 16" OC ALONG EA. EDGE
16d @ 16" OC ALONG EA. EDGE
FACE NAIL (2)-16d

TOE NAIL (3)-8d
TOE NAIL (4)-8d
FACE NAIL (3)-10d
FACE NAIL (3)-10d
TOE NAIL (2)-16d
FACE NAIL (2)-8d
10d @ 24" OC
(2)-16d @ EA.BRG.

EDGES 8d @ 8" OC
INTERMEDIATE 8d @ 12" OC

EDGES 8d @ 6" OC
INTERMEDIATE 8d @ 12" OC

16d NAILS
1/2" DIA M.B. W/ STANDARD NUT AND WASHERS

OWNER SIGNATURE

REVISION STATUS			
REV	DATE	DESCRIPTION	DRAWN BY
00	03/12/2024		
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS	
APPROVED	
APPROVED WITH NOTES	
RESUBMIT	
DISAPPROVED	

OWNER:

ADDRESS:

DESIGN CONSULTANT:

TSABA CORP
NADIF BRACEY
254 CHAPMAN RD,STE 208.13130
NEWARK,DELAWARE 19702
EMAIL:NADIF@TS9DESIGNS.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

ARCHITECTURE











PROJECT TITLE:








RESIDENTIAL

DRAWING TITLE:

WALL FRAMING SHEET

DRAWN BY:	CHECKED BY:	DATE:
D.M	N.B	03/12/2024
JOB NO:	SHT NO:	SCALE:

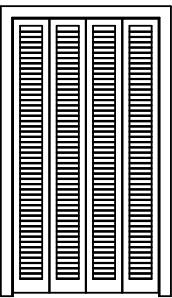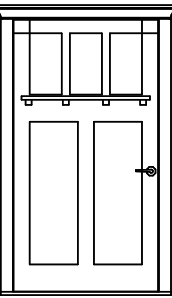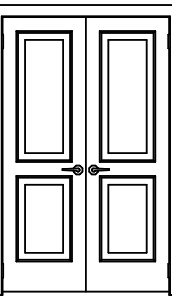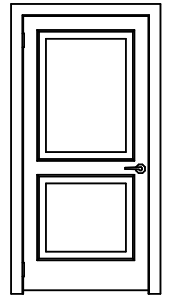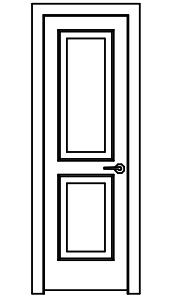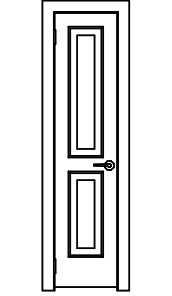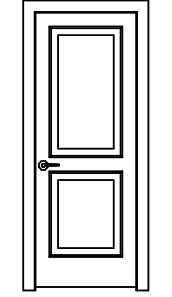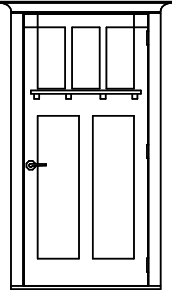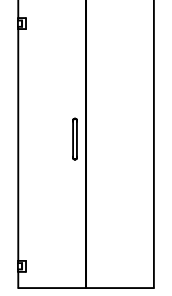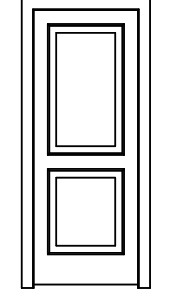DOOR SCHEDULE					
3D EXTERIOR ELEVATION	DESCRIPTION	LABEL	QTY	WIDTH	HEIGHT
	4 DR. BIFOLD-LOUVERED	CD1	1	42 "	80 "
	EXT. HINGED-DOOR E21	D01	1	42 "	80 "
	DOUBLE HINGED-DOOR P04	D02	1	48 "	80 "
	HINGED-DOOR P04	D03	1	36 "	80 "
	HINGED-DOOR P04	D04	2	24 "	80 "
	HINGED-DOOR P04	D05	1	18 "	80 "
	HINGED-DOOR P04	D06	2	29 "	80 "
	EXT. HINGED-DOOR E21	D07	1	36 "	80 "
	DOUBLE SHOWER-GLASS SLAB	GD1	1	37 "	80 "
	POCKET-DOOR P04	SD1	1	30 "	80 "

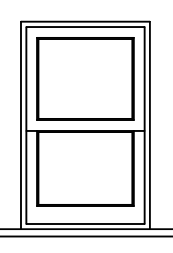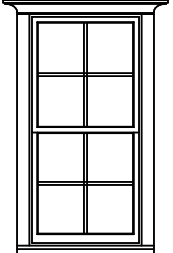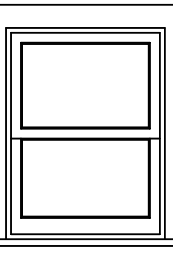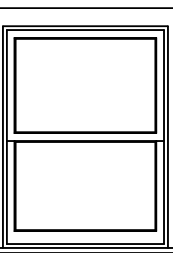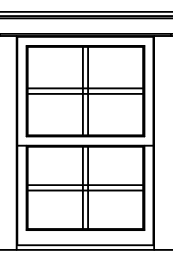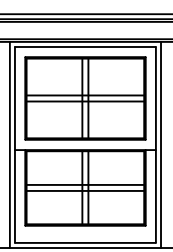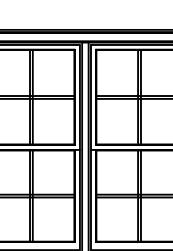WINDOW SCHEDULE					
3D EXTERIOR ELEVATION	NUMBER	QTY	WIDTH	HEIGHT	DESCRIPTION
	W01	1	18 "	29 "	DOUBLE HUNG
	W02	8	32 "	66 "	DOUBLE HUNG
	W03	1	24 "	32 "	DOUBLE HUNG
	W04	1	32 "	43 "	DOUBLE HUNG
	W05	1	24 "	36 "	DOUBLE HUNG
	W06	1	22 "	30 "	SINGLE HUNG
	W08	2	66 "	66 "	MULLED UNIT

DOOR AND WINDOW NOTES:

EVERY BEDROOM SHALL BE PROVIDED WITH AN EGRESS WINDOW WITH FINISH SILL HEIGHT NOT GREATER THAN 44" ABOVE THE FINISH FLOOR HEIGHT AND SHALL HAVE A MINIMUM OPENABLE AREA OF 5.7 SQ. FT. EGRESS WINDOWS SHALL NOT HAVE AN OPENABLE AREA LESS THAN 20" WIDE OR 24" HIGH.

ALL WALK-THRU DOORS SHALL BE SOLID CORE

INTERIOR DOORS SHALL BE PAINTED. ENTRY DOOR TO BE DEFINED BY HOME OWNER PRIOR ORDERING

DOORS BETWEEN GARAGE AND LIVING AREA SHALL BE 1-3/4" TIGHT FITTING SOLID CORE DOORS WITH A RATING OF 60 MINUTES. DOOR SHALL BE SELF CLOSING

EXTERIOR EXIT DOORS WILL BE 36" MIN. NET CLEAR DOORWAY SHALL BE 32" MIN. DOOR SHALL BE OPENABLE FROM INSIDE WITHOUT THE USE OF A KEY OR ANY SPECIAL KNOWLEDGE OR EFFORT. GLAZING IN DOORS SHALL BE DUAL PANE SAFETY GLASS WITH MIN. U-VALUE OF 0.60

GARAGE DOORS TO BE SECTIONAL, OVERHEAD DOORS

OWNER SIGNATURE

REVISION STATUS

REV	DATE	DESCRIPTION	DRAWN BY
00	03/12/2024		
01			
02			
03			
04			

CLIENT/CONSULTANT APPROVAL STATUS

APPROVED	
APPROVED WITH NOTES	
RESUBMIT	
DISAPPROVED	

OWNER:

ADDRESS:

DESIGN CONSULTANT:
TSABA CORP
NADIF BRACEY
254 CHAPMAN RD,STE 208.13130
NEWARK,DELAWARE 19702
EMAIL:NADIF@TS9DESIGNS.COM

DRAWING STATUS:

DESIGN DRAWING

DISCIPLINE:

ARCHITECTURE

PROJECT TITLE:

RESIDENTIAL

DRAWING TITLE:

DOOR & WINDOW SCHEDULE SHEET

DRAWN BY:	CHECKED BY:	DATE:
D.M	N.B	03/12/2024
JOB NO:	SHT NO:	SCALE: